

M-155  
081534 04

---

Formerly Utilized Sites Remedial Action Program (FUSRAP)

---

# ADMINISTRATIVE RECORD

for Maywood, New Jersey

---



U.S. Department of Energy

08 1534-04

M-155

ORNL/RASA-86/60  
(MJ14L)

**HEALTH AND SAFETY RESEARCH DIVISION**

**Nuclear and Chemical Waste Programs  
(Activity No. AH 10 05 00 0; ONLWC01)**

**RESULTS OF THE INDEPENDENT  
RADIOLOGICAL VERIFICATION SURVEY**

**AT  
459 DAVISON STREET, MAYWOOD,  
NEW JERSEY (MJ14L)**

**M. G. Yalcintas  
C. A. Johnson\***

**\*Biology Division**

**Date of Issue — August 1986**

**Investigation Team**

**B. A. Berven — RASA Program Manager  
W. D. Cottrell — FUSRAP Project Director  
M. G. Yalcintas — Field Survey Supervisor**

**Work performed as part of the  
RADIOLOGICAL SURVEY ACTIVITIES PROGRAM**

**Prepared by the  
OAK RIDGE NATIONAL LABORATORY  
Oak Ridge, Tennessee 37831  
operated by  
MARTIN MARIETTA ENERGY SYSTEMS, INC.  
for the  
U.S. DEPARTMENT OF ENERGY  
under Contract No. DE-AC05-84OR21400**

## CONTENTS

	Page
LIST OF FIGURES .....	v
LIST OF TABLES .....	vii
ACKNOWLEDGMENTS .....	ix
INTRODUCTION .....	1
PROCEDURES .....	2
Objectives .....	2
Document Reviews .....	2
VERIFICATION SURVEY AND ANALYSIS .....	2
Gamma Measurements .....	3
Soil Sampling .....	3
CONCLUSION .....	4
REFERENCES .....	5

## LIST OF FIGURES

Figure		Page
1	Vicinity properties in the Maywood, New Jersey, area .....	6
2	Diagram showing grid point and grid block locations outdoors on the property at 459 Davison St., Maywood, New Jersey (MJ14L) .....	7
3	Locations of soil samples on the property at 459 Davison St., Maywood, New Jersey (MJ14L) .....	8

**LIST OF TABLES**

<b>Table</b>		<b>Page</b>
1	Summary of residual contamination guidelines for the Maywood, New Jersey, site .....	9
2	Background radiation levels in the Maywood, New Jersey, area .....	11
3	Results and locations of the pressurized ionization chamber (PIC) measurements at 459 Davison St., Maywood, New Jersey (MJ14L) .....	11
4	Results of soil sample analysis at 459 Davison St., Maywood, New Jersey (MJ14L) .....	12

08 1534

### ACKNOWLEDGMENTS

Research for this project was sponsored by the Division of Facility and Site Decommissioning Projects, U.S. Department of Energy. The authors wish to acknowledge the support of J. E. Baublitz, Deputy Director, Office of Remedial Action and Waste Technology, E. G. DeLaney, Director, Division of Facility and Site Decommissioning Projects, and members of their staff. The authors recognize the valuable contributions of C. Leichtweis of Bechtel National, Inc. (BNI), for providing the data collected by BNI during the remedial action and T. R. Stewart of the RASA group for assisting during the preparation of this report. In addition, the authors appreciate the manuscript preparation by S. E. Huckaba, RASA, J. W. Crutcher, Biology Division, and S. W. Hawthorne and B. C. Littleton, Information Resources Organization.

**RESULTS OF THE  
INDEPENDENT RADIOLOGICAL VERIFICATION SURVEY AT  
459 DAVISON STREET, MAYWOOD, NEW JERSEY (MJ14L)\***

**INTRODUCTION**

Processing of thorium ores was performed in Maywood, New Jersey, between 1916 and 1956 by the Maywood Chemical Works.<sup>1</sup> During the course of thorium processing the wastes from the operations were pumped to diked areas west of the plant. Additional material was placed in two piles surrounded by earthen dikes. In 1932, Route 17 was built through this disposal area. The Maywood Chemical Works ceased thorium processing in 1956 and subsequently was sold to Stepan Chemical Company in 1959. After 1963, on several occasions wastes were removed from the west side of New Jersey Route 17. This area is now owned by Ballod and Associates. In 1984, the U.S. Department of Energy (DOE) was assigned the responsibility by Congress for the decontamination project involving the site and vicinity properties in Maywood and Rochelle Park under the Formerly Utilized Sites Remedial Action Program (FUSRAP).

This site, referred to as the Maywood site, had surface and subsurface radionuclide concentrations in excess of the DOE criteria listed in Table 1. It has been identified through radiological assessment procedures by Oak Ridge Associated Universities and Nuclear Safety Associates, Inc.,<sup>1,2</sup> for the purpose of decontamination based on DOE's remedial action objectives. The Maywood site and vicinity properties, which include the residential properties on Latham and Davison Streets in Maywood, were assigned by DOE to FUSRAP although the contamination at the Maywood site did not result from the Atomic Energy Program.

From June to December, 1984, Bechtel National, Inc. (BNI), the project management contractor designated by DOE, performed remedial action on this residential property. This remedial action is on one of six designated properties in the Maywood area (Fig. 1). Based on drawings showing the extent of contamination, the property was excavated and the contaminated material transported to the Maywood Interim Storage Site (MISS), adjacent to the Stepan Company plant.<sup>3</sup> After removal of all contaminated soil, the property was restored to its original condition. By using a combination of procedures, the contamination was controlled and prevented from spreading to other areas. A post-remedial radiological survey was conducted by BNI to ensure compliance with DOE remedial action guidelines.<sup>4</sup>

The DOE adopted a policy to assign an independent verification contractor to ensure the effectiveness of remedial actions performed within FUSRAP. The Radiological Survey Activities Group of Oak Ridge National Laboratory (ORNL) has been assigned the responsibility for this task at the Maywood site. This report describes the methods and results of that verification.

---

\*The survey was performed by members of the Radiological Survey Activities Group of the Health and Safety Research Division at Oak Ridge National Laboratory under DOE contract DE-AC05-84OR21400 with Martin Marietta Energy Systems, Inc.

From January to June, 1986, ORNL conducted the verification activity for the Maywood properties, including this location at 459 Davison St., located southeast of the Ballo property. A diagram of the property showing the approximate property boundaries and grid network established for measurements outside the buildings is shown in Fig. 2. This location is one in a series of vicinity properties near the Maywood site that was suspected of being radioactively contaminated, and that has been surveyed by BNI<sup>3</sup> to identify horizontal and vertical boundaries of radionuclide concentrations exceeding remedial action criteria. (Verification of these properties will be completed in 1986.) A contaminated area of <100 m<sup>2</sup> that exceeded the guidelines was located in localized areas of the property surrounding the house and was excavated.

## PROCEDURES

### Objectives

The objective of the verification activities was to confirm (1) that available documentation adequately and accurately describes the post-remedial action radiological conditions of the entire property that is to be certified and (2) that the remedial action reduced contamination levels to within authorized limits.

### Document Reviews

Review of the designation/characterization report<sup>3</sup> prepared by BNI indicates that the contamination was a shallow deposit and, according to residents, was hauled in from the Maywood site; thus, it was appropriate to designate this property for remedial action.

The post-remedial action report<sup>4</sup> indicates that the area excavated on this property was as identified in the designation report. The post-remedial action survey was performed on this property as described for a generic site in Ref. 5. This survey consists of ground-level beta-gamma measurements, surface gamma measurements, and systematic soil sampling. From the review of the post-remedial action report, it can be concluded that the BNI survey procedure used for this property is satisfactory. All reported <sup>238</sup>U, <sup>226</sup>Ra, and <sup>232</sup>Th soil sample concentrations are below the average guideline limits set by DOE (Table 1).

## VERIFICATION SURVEY AND ANALYSIS

Typical background radiation levels for the Maywood, New Jersey, area are presented in Table 2. The data are provided for purposes of comparison with the survey results presented in this section.

All measurements presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations in soil samples.

### Gamma Measurements

Results of grid point measurements made by BNI are presented in the confirmatory report (Ref. 4). Eleven pressurized ionization chamber (PIC) readings were taken at this property by BNI. The results and the locations of these readings are presented in Table 3. Gamma exposure rates at 1 m above ground surface ranged from 8 to 11  $\mu\text{R}/\text{h}$  (microroentgens\* per hour) and averaged 10  $\mu\text{R}/\text{h}$ .

### Soil Sampling

Before backfilling, ten soil samples were taken by BNI in the excavated area. The procedures used for soil sample analysis have been described in Ref. 3. Results of the soil sample analysis and the locations of the samples are given by BNI in the post-remedial confirmatory report.

Eight of the ten systematic soil samples from different locations and various depths were selected for independent verification by ORNL (see Table 4). The eight samples have been analyzed for  $^{238}\text{U}$ ,  $^{226}\text{Ra}$ , and  $^{232}\text{Th}$  according to the procedure described in Ref. 6.

Concentrations of  $^{238}\text{U}$  in the soil samples ranged from 0.6 to 2.0 pCi/g (picocuries† per gram) and averaged 1.5 pCi/g. Concentrations of  $^{226}\text{Ra}$  in the soil samples ranged from 0.69 to 1.2 pCi/g and averaged 0.89 pCi/g. Concentrations of  $^{232}\text{Th}$  in the soil samples ranged from 0.76 to 2.6 pCi/g and averaged 1.4 pCi/g. Locations of the soil samples are shown in Fig. 3. Results of ORNL analyses for the aforementioned eight soil samples are given in Table 4, with results by BNI in parentheses for comparison. The significance of difference between average ORNL values and average BNI values was tested by a single-sample *t*-test assuming ratios of paired values are log normally distributed. For 14 degrees of freedom and a 0.05 level of significance, the values in the critical range for a *t*-test of the null hypothesis are greater than 2.2. The observed *t* value for  $^{232}\text{Th}$  is 0.60 which is not significant. The associated *P* value is 0.5. Hence, there is no evidence in the data to indicate that the average log ratio is different from zero. Because BNI's results for  $^{238}\text{U}$  were not absolute (see Table 4), no statistical test was performed for this radionuclide.

---

\*The roentgen (R) is a unit which was defined for radiation protection purposes for people exposed to penetrating X rays or gamma radiation. A microroentgen ( $\mu\text{R}$ ) is one millionth of a roentgen. A milliroentgen (mR) is one thousandth of a roentgen or one thousand microroentgens.

†The curie is a unit used to define the radioactivity in a substance and equals that quantity of any radioactive isotope undergoing  $2.2 \times 10^{12}$  disintegrations per minute. The picocurie is one million-millionth of a curie or that amount yielding 2.2 disintegrations per minute.

## CONCLUSION

Measurements of the gamma exposure levels taken from the excavated area before backfilling determined that the exposure rate at 1 m above the ground surface ranged from 8 to 11  $\mu\text{R}/\text{h}$  and averaged 10  $\mu\text{R}/\text{h}$ . For comparison, the background for the state of New Jersey<sup>7-9</sup> averages  $\sim 8$   $\mu\text{R}/\text{h}$  and ranges from 6 to 11  $\mu\text{R}/\text{h}$  based on 1968 measurements. The results of soil radionuclide analyses for  $^{238}\text{U}$ ,  $^{226}\text{Ra}$ , and  $^{232}\text{Th}$  show that all soil concentration measurements are within the limits prescribed by DOE radiological guidelines.<sup>10</sup>

Based upon the results of the post-remedial action data, which were confirmed by the verification survey data, soil concentration measurements fall well below the limits prescribed by DOE radiological guidelines established for this site. It is concluded that the site successfully meets the DOE remedial action objectives.

## REFERENCES

1. L. W. Cole, J. Berger, P. Cotten, R. Gosslee, L. Sowell, and C. Weaver, *Radiological Assessment of Ballod Associates Property (Stepan Chemical Company), Maywood, New Jersey*, Oak Ridge Associated Universities, Oak Ridge, Tenn., July 30, 1981.
2. H. W. Morton, *Natural Thorium in Maywood, New Jersey*, Nuclear Safety Associates, Inc., Potomac, Md., September 29, 1982.
3. *Radiological Survey Report for Maywood Vicinity Properties on Grove Avenue and Park Way, Maywood, New Jersey*, Bechtel National, Inc., Advanced Technology Division, Oak Ridge, Tenn., DOE/OR/20722-11, June 1984.
4. *Post-Remedial Action Report for the Residential Properties on Davison and Latham Streets, Maywood, New Jersey*, Bechtel National, Inc., Advanced Technology Division, Oak Ridge, Tenn., DOE/OR/20722-77, February 1986.
5. *Remedial Action Work Plan for the Maywood Site*, U.S. Department of Energy, Oak Ridge Operations, Oak Ridge, Tenn., ORO-850, Rev. 1, April 1985.
6. T. E. Myrick, B. A. Berven, W. D. Cottrell, W. A. Goldsmith, and F. F. Haywood, *Procedures Manual for the Remedial Action Survey and Certification Activities (RASCA) Program*, Oak Ridge National Laboratory, ORNL/TM-8600, September 1982.
7. U.S. Department of Energy, *Radiological Survey of the Middlesex Municipal Land-fill, Middlesex, New Jersey*, DOE/EV-0005/20, April 1980.
8. S. G. Levin, R. K. Stoms, E. Kuerze, and W. Huskisson, "Summary of Natural Environmental Gamma Radiation Using a Calibrated Portable Scintillation Counter," *Radiological Health Data Report* 9:679-695 (1968).
9. C. L. Lindekin, K. R. Peterson, D. E. Jones, and R. E. McMillen, "Geographical Variations in Environmental Radiation Background in the United States." *Proceedings of the Second International Symposium on the Natural Radiation Environment*, CONF-720805-P-1, pp. 317-331 (1972).
10. U.S. Department of Energy, *Guidelines for Residual Radioactivity at Formerly Utilized Sites Remedial Action Program and Remote Surplus Facilities Management Program Sites*, Rev. 1, July 1985.

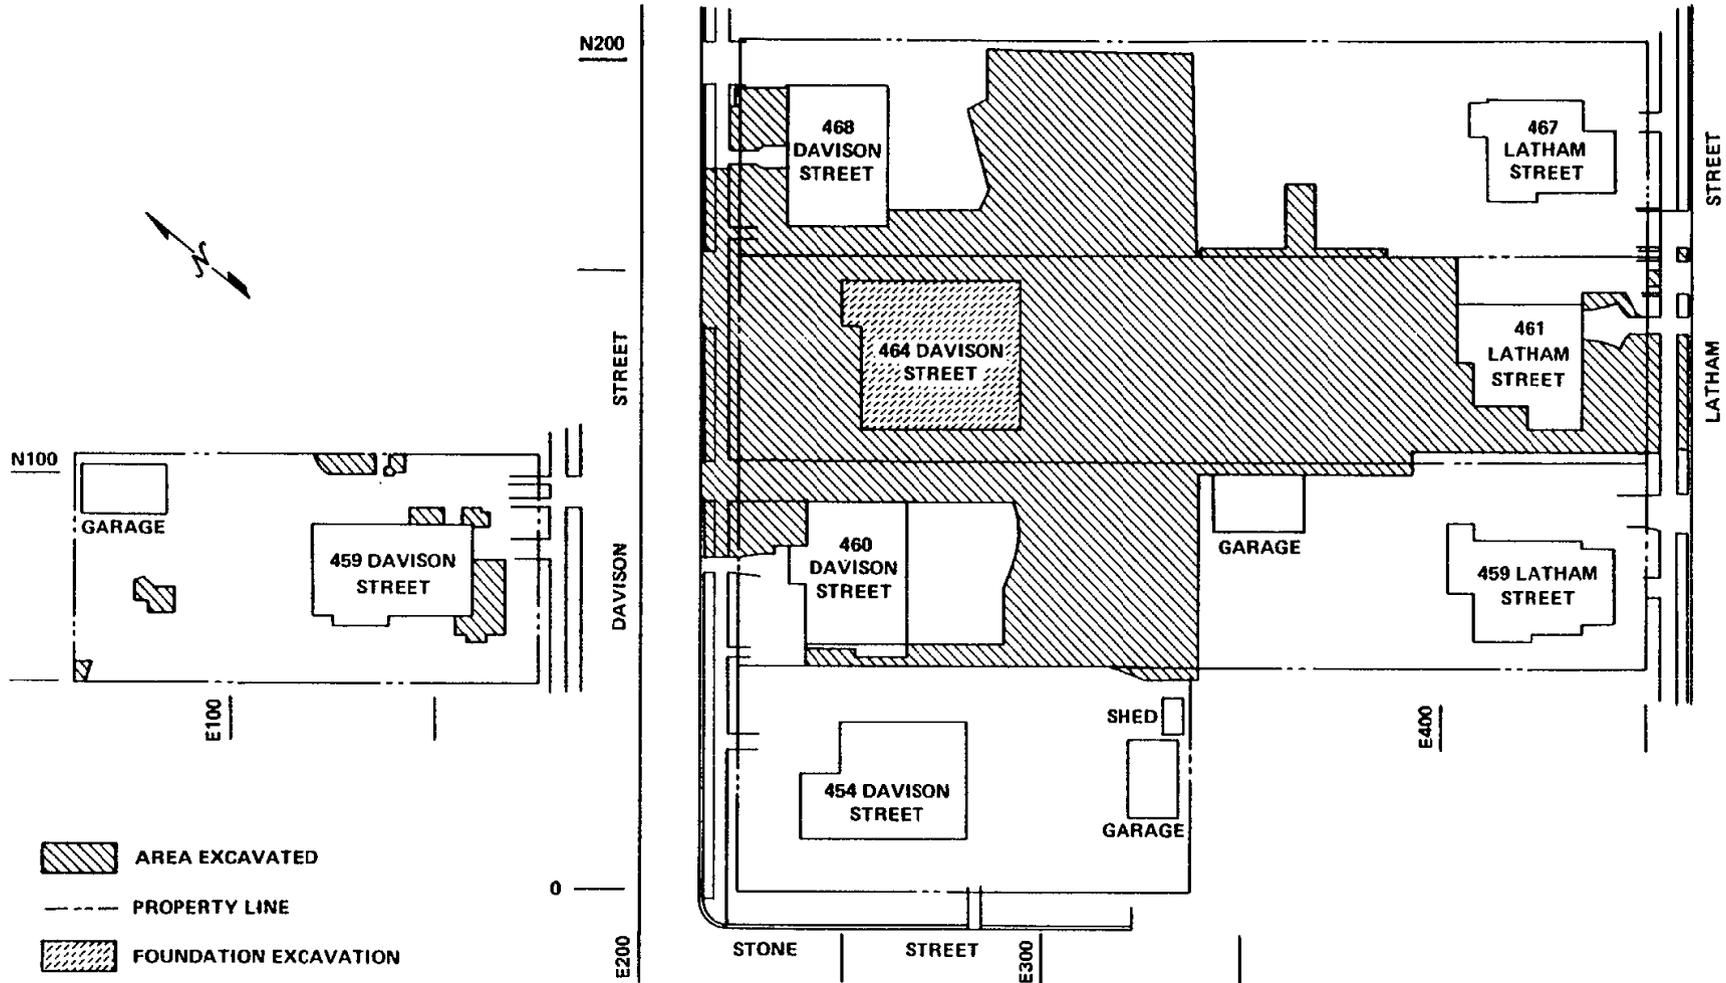


Fig. 1. Vicinity properties in the Maywood, New Jersey, area.

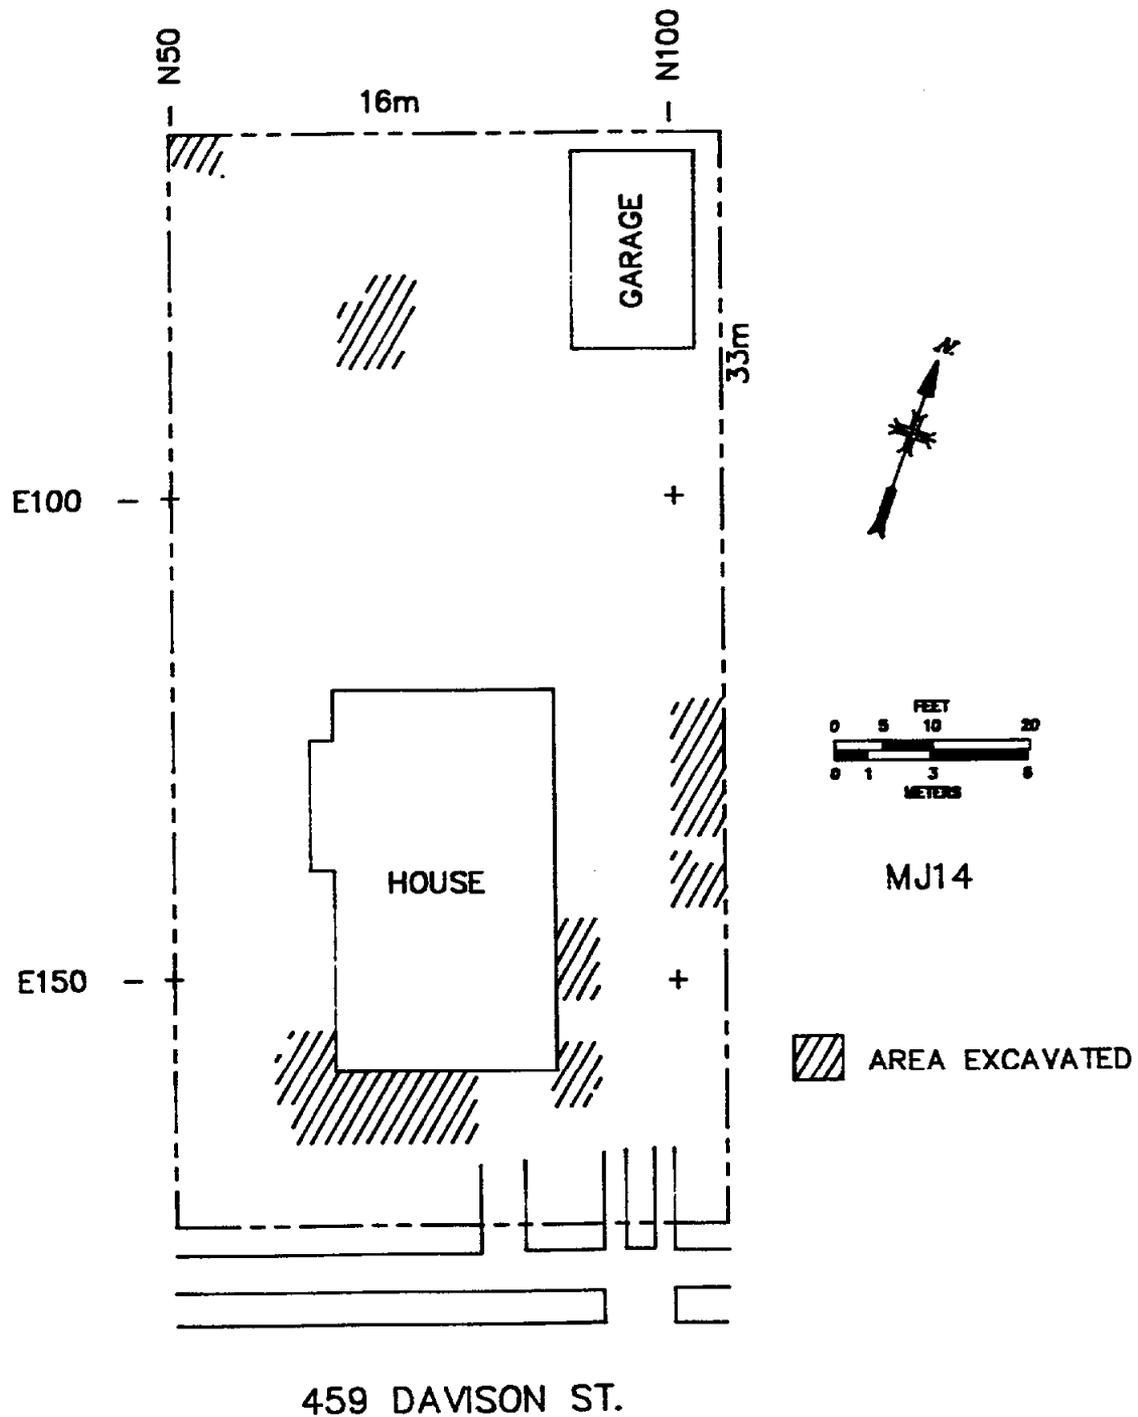


Fig. 2. Diagram showing grid point and grid block locations outdoors on the property at 459 Davison St., Maywood, New Jersey (MJ14L).

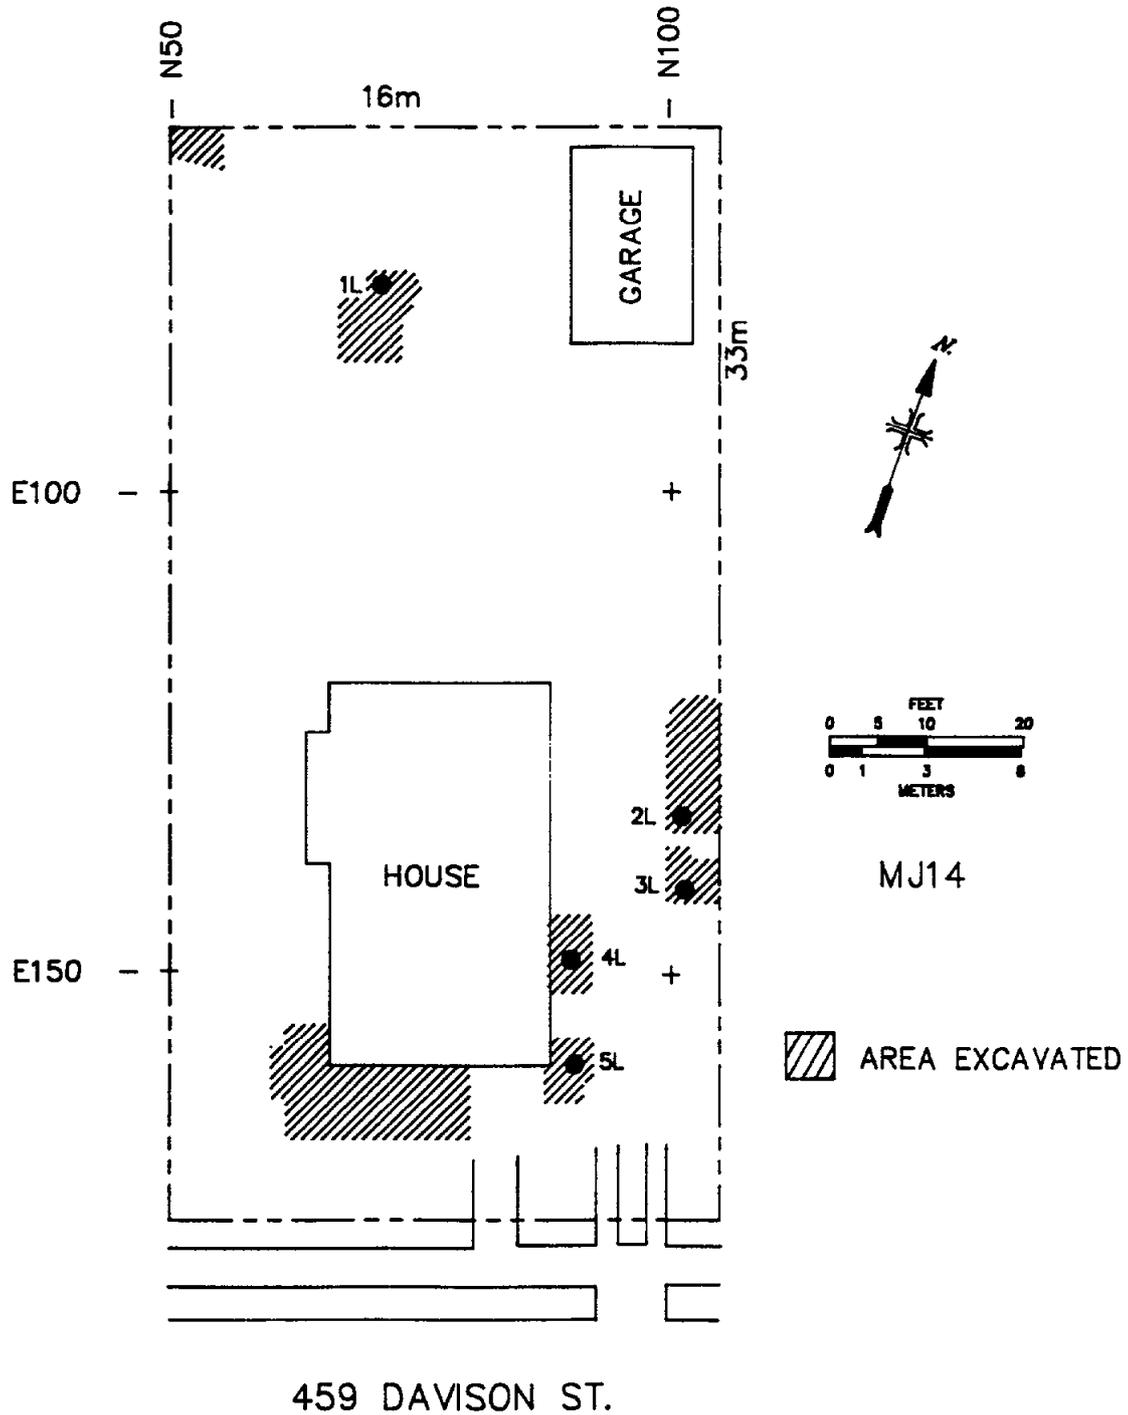


Fig. 3. Locations of soil samples on the property at 459 Davison St., Maywood, New Jersey (MJ14L).

**Table 1. Summary of residual contamination guidelines for the Maywood, New Jersey, site**

<b>Soil (Land) Guidelines (Maximum Limits for Unrestricted Use)</b>	
Radionuclide	Soil concentration (pCi/g) above background <sup>a,b</sup>
<sup>226</sup> Ra <sup>228</sup> Ra <sup>230</sup> Th <sup>232</sup> Th	5 pCi/g, averaged over the first 15 cm of soil below the surface; 15 pCi/g when averaged over any 15-cm-thick soil layer below the surface layer
Other radionuclides	Soil guidelines will be calculated on a site-specific basis using the DOE manual developed for this use

**Structure Guidelines (Maximum Limits for Unrestricted Use)**

*Indoor Radon Decay Products*

For <sup>222</sup>Ra and <sup>220</sup>Rn concentrations in buildings, the average annual radon decay product concentration (including background) due to uranium or thorium by-products should not exceed 0.02 WL after remedial action. When remedial action has been performed and it would be unreasonably difficult and costly to reduce the level below 0.03 WL, the remedial action may be terminated, and the reasons for termination should be documented. Remedial action shall be undertaken for any building that exceeds an annual average radon decay product concentration (including background) of 0.03 WL.

*Indoor Gamma Radiation*

The indoor gamma radiation after decontamination shall not exceed 20 microrentgen per hour (20  $\mu$ R/h) above background in any occupied or habitable building.

*Indoor/Outdoor Structure Surface Contamination*

Radionuclide <sup>d</sup>	Allowable Surface Residual Contamination <sup>c</sup> (dpm/100 cm <sup>2</sup> )		
	Average <sup>e,f</sup>	Maximum <sup>e</sup>	Removable <sup>e</sup>
Transuranics, <sup>226</sup> Ra, <sup>228</sup> Ra, <sup>230</sup> Th, <sup>228</sup> Th, <sup>231</sup> Pa, <sup>227</sup> Ac, <sup>125</sup> I, <sup>129</sup> I	100	300	20
Natural Th, <sup>232</sup> Th, <sup>90</sup> Sr, <sup>223</sup> Ra, <sup>224</sup> Ra, <sup>232</sup> U, <sup>126</sup> I, <sup>131</sup> I, <sup>133</sup> I	1,000	3,000	200
Natural U, <sup>235</sup> U, <sup>238</sup> U, and associated decay products	5,000	15,000	1,000

Table 1 (continued)

Radionuclide <sup>d</sup>	Allowable Surface Residual Contamination <sup>c</sup> (dpm/100 cm <sup>2</sup> )		
	Average <sup>e,f</sup>	Maximum <sup>e</sup>	Removable <sup>e</sup>
Beta-gamma emitters (radionuclides with decay modes other than alpha emission or spontaneous fission) except <sup>90</sup> Sr and others noted above	5,000	15,000	1,000

<sup>a</sup>In the event of occurrence of mixtures of radionuclides, the fraction contributed by each radionuclide to its limit shall be determined, and the sum of these fractions shall not exceed 1.

<sup>b</sup>These guidelines represent unrestricted-use residual concentrations above background averaged across any 15-cm-thick layer to any depth and over any contiguous 100-m<sup>2</sup> surface area.

<sup>c</sup>As used in this table, dpm (disintegrations per minute) means the rate of emission by radioactive material as determined by correcting the counts per minute observed by an appropriate detector for background, efficiency, and geometric factors associated with the instrumentation.

<sup>d</sup>Where surface contamination by both alpha- and beta-gamma-emitting radionuclides exists, the limits established for alpha- and beta-gamma-emitting radionuclides shall apply independently.

<sup>e</sup>Measurements of average contaminant should not be averaged over more than 1 m<sup>2</sup>. For objects of less surface area, the average shall be derived for each such object.

<sup>f</sup>The average and maximum radiation levels associated with surface contamination resulting from beta-gamma emitters should not exceed 0.2 mrad/h at 1 cm and 1.0 mrad/h at 1 cm, respectively, measured through not more than 7 mg/cm<sup>2</sup> of total absorber.

**Table 2. Background radiation levels in the Maywood, New Jersey, area**

Type of radiation measurement or sample	Radiation level or radionuclide concentration	
	Range	Average
Gamma exposure rate at 1 m above floor or ground surface ( $\mu\text{R}/\text{h}$ ) <sup>a</sup>	8-11	9
Concentration of radionuclides in soil (pCi/g) <sup>b</sup>		
<sup>238</sup> U	0.13-1.4	0.86
<sup>226</sup> Ra	0.24-1.4	0.87
<sup>232</sup> Th	0.31-1.5	0.9

<sup>a</sup>Values obtained from 35 locations in the Rochelle Park area.<sup>8</sup>

<sup>b</sup>Soil samples obtained from locations around the Maywood area.<sup>6</sup>

**Table 3. Results and locations of the pressurized ionization chamber (PIC) measurements at 459 Davison St., Maywood, New Jersey (MJ14L)<sup>a</sup>**

Coordinates		Gamma exposure rate ( $\mu\text{R}/\text{h}$ )
East	North	
63	52	8
75	70	11
87	65	9
119	82	9
120	65	9
139	102	10
154	90	10
162	70	11
182	64	10
183	94	10
185	64	9

<sup>a</sup>Ref. 4.

**Table 4. Results of soil sample analysis at 459 Davison St.,  
Maywood, New Jersey (MJ14L)**

BNI results are shown in parentheses

Sample	Location <sup>a</sup>		Depth (cm)	Radionuclide concentration (pCi/g)		
	East	North		<sup>226</sup> Ra <sup>b</sup>	<sup>232</sup> Th <sup>b</sup>	<sup>238</sup> U <sup>c</sup>
<b>Systematic Samples<sup>d</sup></b>						
1L	71.5	70	15-30	1.1 ± 0.2 (1.0)	2.6 ± 0.1 (2.8)	2.0 (<5)
2AL	132.5	102	15-30	0.75 ± 0.17 (0.7)	0.96 ± 0.12 (0.9)	2.0 (<5)
2BL	132.5	102	30-45	0.69 ± 0.15 (0.6)	0.95 ± 0.12 (0.9)	2.0 (<5)
3AL	142	102	15-30	0.75 ± 0.17 (0.7)	0.97 ± 0.1 (1.0)	2.0 (<5)
3BL	142	102	30-45	0.8 ± 0.17 (0.8)	0.94 ± 0.11 (0.8)	2.0 (0.95 ± 0.3)
4L	147	90.5	15-30	0.71 ± 0.11 (0.6)	0.76 ± 0.08 (1.0)	0.8 (<5)
5AL	158.5	90.5	15-30	1.1 ± 0.1 (1.1)	2.0 ± 0.1 (1.2)	0.6 (1.1)
5BL	158.5	90.5	30-45	1.2 ± 0.1 (1.1)	2.0 ± 0.1 (2.1)	0.8 (<5)

<sup>a</sup>Locations of soil samples are shown on Fig. 3.

<sup>b</sup>Indicated counting error is at the 95% confidence level ( $\pm 2\sigma$ ).

<sup>c</sup>Analytical error of measurement results is less than  $\pm 5\%$  (95% confidence level).

<sup>d</sup>Systematic samples are taken at grid locations irrespective of gamma exposure.

ORNL/RASA-86/60  
(MJ14L)

### INTERNAL DISTRIBUTION

- |                   |                              |
|-------------------|------------------------------|
| 1. B. A. Berven   | 7. P. T. Owen                |
| 2. R. O. Chester  | 8. T. H. Row                 |
| 3. W. D. Cottrell | 9-13. M. G. Yalcintas        |
| 4. C. A. Johnson  | 14. IR&A Publications Office |
| 5. S. V. Kaye     | 15. Laboratory Records - RC  |
| 6. J. L. Marley   |                              |

### EXTERNAL DISTRIBUTION

- 16-20. S. W. Ahrends, U.S. Department of Energy, Technical Services Division, Oak Ridge Operations Office, Oak Ridge, TN 37831
21. J. D. Berger, Oak Ridge Associated Universities, P.O. Box 117, Oak Ridge, TN 37831
- 22-24. E. G. DeLaney, U.S. Department of Energy, Director, Division of Facilities and Site Decommissioning Projects, Office of Nuclear Energy, 19901 Germantown Road, Germantown, MD 20874
- 25-27. C. E. Miller, U.S. Department of Energy, Director, Surplus Facilities Management, Richland Operations Office, P.O. Box 550, Richland, WA 99352
- 28-29. J. F. Nemeec, Bechtel National, Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
30. J. W. Wagoner II, U.S. Department of Energy, Division of Facilities and Site Decommissioning Projects, Office of Nuclear Energy, 19901 Germantown Road, Germantown, MD 20874
31. A. Wallo, Aerospace Corporation, Environmental and Conservation Directorate, 955 L'Enfant Plaza, SW, Suite 4000, Washington, DC 20024
32. Office of Assistant Manager, Energy Research and Development, Oak Ridge Operations Office, Oak Ridge, TN 37831
- 33-34. Office of Scientific and Technical Information, U.S. Department of Energy, Oak Ridge, TN 37831