

M-747

---

Formerly Utilized Sites Remedial Action Program (FUSRAP)

---

# ADMINISTRATIVE RECORD

for the Maywood Site, New Jersey

---



**US Army Corps  
of Engineers®**

M-147  
081534

Health and Safety Research Division

RESULTS OF THE RADIOLOGICAL SURVEY  
AT 464 DAVISON AVENUE, MAYWOOD, NEW JERSEY

September 1981

Work performed  
as part of the  
REMEDIAL ACTION SURVEY AND  
CERTIFICATION ACTIVITIES

OAK RIDGE NATIONAL LABORATORY  
Oak Ridge, Tennessee 37830  
operated by  
UNION CARBIDE CORPORATION  
for the  
DEPARTMENT OF ENERGY

000'548

08 153 4

CONTENTS

	<u>Page</u>
LIST OF FIGURES . . . . .	iv
LIST OF TABLES . . . . .	v
INTRODUCTION. . . . .	1
SURVEY METHODS. . . . .	2
SURVEY RESULTS. . . . .	3
Outdoor Survey Results . . . . .	3
Indoor Survey Results . . . . .	5
SUMMARY . . . . .	7
REFERENCES . . . . .	9
APPENDIX I, Action and Survey Plan, Maywood, New Jersey . . . . .	33
APPENDIX II, Gamma Profile Graphs of Core Holes at 464 Davison Avenue in Maywood, New Jersey. . . . .	43
APPENDIX III, Evaluation of Radiation Exposures at 454 Davison Avenue in Maywood, New Jersey. . . . .	61

0 0 0 5 4 9

08 1534

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Front view of property at 464 Davison Avenue in Maywood, New Jersey . . . . .	10
2	Rear view of property at 464 Davison Avenue in Maywood, New Jersey . . . . .	11
3	Grid point and grid block locations at 464 Davison Avenue . . . . .	12
4	External gamma-ray measurements at the ground surface at 464 Davison Avenue . . . . .	13
5	Location of systematic and bias soil samples at 464 Davison Avenue . . . . .	14
6	Location of drill holes outdoors at 464 Davison Avenue . . . . .	15
7	Schematic of the first level floor plan at 464 Davison Avenue showing external gamma-ray measurement results . . . . .	16
8	Schematic of the basement floor plan at 464 Davison Avenue showing locations of drill holes and external gamma-ray measurement results . . . . .	17
9	Estimated extent of contaminated areas at 464 Davison Avenue . . . . .	18

000550

08 1534

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1	A summary of applicable radiation guidelines . . . . .	19
2	Background levels for the northern New Jersey area . . . . .	20
3	Outdoor measurements at 464 Davison Avenue . . . . .	21
4	Results of radionuclide analyses of surface soil samples from 464 Davison Avenue . . . . .	24
5	Summary of gamma logging of auger holes at 464 Davison Avenue . . . . .	25
6	Results of radionuclide analyses of subsurface soil samples from 464 Davison Avenue . . . . .	26
7	Indoor measurements at 464 Davison Avenue. . . . .	28
8	Radon and radon daughter measurements at 464 Davison Avenue . . . . .	29
9	Summary of outdoor measurements and sample results at 464 Davison Avenue. . . . .	30
10	Summary of radon measurements and sample results at 464 Davison Avenue. . . . .	31
11	Summary of measurement results in contaminated areas at 464 Davison Avenue. . . . .	32

000551

08 153 4

RESULTS OF THE RADIOLOGICAL SURVEY  
AT 464 DAVISON AVENUE, MAYWOOD, NEW JERSEY\*

INTRODUCTION

A comprehensive radiological survey of 464 Davison Avenue, Maywood, New Jersey, was conducted by Oak Ridge National Laboratory (ORNL) from June 3 to 10, 1981, with assistance from Oak Ridge Associated Universities (ORAU). Contaminated material was discovered in the area during an EG&G aerial radiological survey,<sup>1</sup> and confirmed by a ground-level radiological survey by the Nuclear Regulatory Commission.<sup>2</sup> This contaminated material is believed to have originated from the former Maywood Chemical Company (now the Stepan Chemical Company).

The Maywood Chemical Company was founded in 1895. From about 1916 until 1957, the Maywood Chemical Company processed thorium for use in the manufacture of gas mantles for various lighting devices.<sup>1</sup> In 1932, Route 17 was built to the west of the main plant through an area that was used for disposal of process wastes. Although access to the site was probably restricted, the waste disposal area had no access restrictions. In 1959, Maywood Chemical Company was purchased by the Stepan Chemical Company.

During an aerial survey of the Stepan Chemical Company and the surrounding area in Maywood, New Jersey, by EG&G<sup>1</sup> on January 26, 1981, anomalously high gamma-ray exposure rates (principally <sup>232</sup>Th daughter radionuclides) were observed in a residential area close to the Stepan Chemical site. Seven private homes in Maywood, New Jersey, were later identified in a follow-up ground survey by the Nuclear Regulatory Commission<sup>2</sup> (NRC) as having external gamma radiation levels significantly above background. Gamma-ray exposure rates up to 3 mR/h were observed on these properties during NRC surveys.

Additional historical information about the seven private properties was obtained from John Tripuka, owner of the property at 461 Latham Street. Mr. Tripuka related that his father moved into 461 Latham in 1928, the

---

\*The survey was performed by members of the Off-Site Pollutant Measurements Group of the Health and Safety Research Division at Oak Ridge National Laboratory, under DOE contract W-7405-eng-26.

0 0 0 5 5 2

same year the house was built. The father was employed at the Maywood Chemical Plant. The plant at that time allowed removal of processing waste by-products from their operations, charging only a minimal fee for transportation. Much of the by-product material from other operations in the plant was in the form of tea and cocoa leaves mixed with other fill material. In many instances, this material was used as a rich organic mulch for topsoil for gardens, flowers and shrubbery and as general fill material for lawns. The elder Mr. Tripuka owned a vacant lot that is now 464 Davison Avenue, and between approximately 1944-1946 had many truck loads of this material deposited at the vacant lot. This material was used primarily for fill in a ditch that laterally traversed the back of several lots between Davison Avenue and Latham Street. Apparently, some of this mulch material contained thorium process wastes. Several neighbors in the area used this material for vegetable and flower gardens as well as fill for low spots in their lawns. The remaining unused material was pushed out and spread over the 464 Davison lot. The lot was sold at a later date and a house was built on the vacant lot in 1967.

The present owners of 464 Davison Avenue, the Albert Cielo family, purchased the property in 1974. Currently there are two adult occupants of the house. Front and rear views of the property are provided in Figs. 1 and 2, respectively. The layout of the property, depicting the survey grid pattern and approximate property boundaries, is shown in Fig. 3. The dimensions of the lot are approximately 15 m wide by 39 m deep.

#### SURVEY METHODS

The survey measurements performed as part of the radiological survey at 464 Davison Avenue were done according to the survey plan of May 27, 1981.<sup>3</sup> This action and survey plan for Maywood, New Jersey, is provided in Appendix I. A comprehensive description of the survey methods and instrumentation, as well as the radiation guidelines used in evaluating the data, have been provided in other reports (e.g., reference 4).

## SURVEY RESULTS

Applicable federal guidelines have been summarized in Table 1. The normal background levels for the northern New Jersey area are presented in Table 2. These data are provided for comparison with the survey results presented in this section.

With the exception of measurements of transferable activity which represent net count rates, all direct measurement results presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations measured in environmental samples.

Outdoor Survey Results

External gamma-ray and beta-gamma measurements. The results of the grid point measurements and grid block scans are presented in Table 3. A graphical presentation of the surface gamma-ray exposure rates at grid point locations across the property is given in Fig. 4. Analysis of this data indicates that contaminated materials are present in varying concentrations over the entire property. Surface gamma-ray exposure rates at the grid points ranged from 14 to 780  $\mu\text{R}/\text{h}$ , with a maximum measured value of 5000  $\mu\text{R}/\text{h}$  determined from the grid block scans. The lower exposure rate readings observed over asphalt and concrete are not indicative of lesser contamination present in these areas, but rather gamma-ray attenuation by these materials. Surface beta-gamma dose rates were found to range from 0.02 to 3  $\text{mrad}/\text{h}$  at the grid points, with a maximum measured value of 8  $\text{mrad}/\text{h}$ .

The average external gamma-ray exposure rate at 1 m above the surface on this property was determined to be 140  $\mu\text{R}/\text{h}$ . Individual measurements of the 1 m exposure rate ranged from 18 to 390  $\mu\text{R}/\text{h}$  at the grid points, with a maximum measured value of 920  $\mu\text{R}/\text{h}$  at the location of maximum surface exposure. Both the average and maximum measured exposure rates exceed the NRC guideline for continuous exposure (10 CFR 20). All gamma-ray exposure rates measured outdoors at this property were in excess of the background levels for the Maywood area.

0 0 5 5 4

Surface soil samples. Surface soil samples were collected at twenty systematic locations (MJ samples) and two biased locations (MJB samples) on the property. These sampling locations are depicted in Fig. 5. Results of the laboratory analysis for  $^{232}\text{Th}$ ,  $^{238}\text{U}$ , and  $^{226}\text{Ra}$  concentrations in these samples are presented in Table 4. As expected, elevated concentrations of  $^{232}\text{Th}$  were measured in all soil samples analyzed. Measured concentrations in systematic samples were found to range from 2.7 to 1200 pCi/g for  $^{232}\text{Th}$ , 0.87-60 pCi/g for  $^{238}\text{U}$ , and 1.0-1200 pCi/g for  $^{226}\text{Ra}$ . The  $^{232}\text{Th}$  concentrations in the biased samples ranged up to approximately 5500 pCi/g. Average radionuclide concentrations in surface soil from across the yard were significantly above background for all three measured nuclides.

Subsurface investigations. Analysis of subsurface soil contamination was provided by drilling, gamma-ray logging, and soil sampling of auger holes in various areas on the property. Fifteen auger holes were drilled outdoors at the locations shown on Fig. 6.

A summary of the results of the gamma-ray logging of these auger holes is provided in Table 5. The gamma-ray activity as a function of depth is graphically depicted in Appendix II. Evidence of subsurface contamination was observed in every hole drilled on the site. The depth of this contamination varied from hole to hole, but the results generally indicate that the residual radioactive materials are present over the entire property from the surface to an average depth of approximately 1 m. The maximum depth of contamination observed in any of the logged holes was 1.7 m (hole MJC44 in the front yard), although the data from several holes (MJC26-28, MJC33, and MJC45) are not sufficient to put a lower bound on the depth of contamination at these locations.

The results of the radionuclide analysis of soil samples taken from the drill holes are presented in Table 6. These results correlate well with the gamma-ray logging data, showing elevated concentrations of  $^{232}\text{Th}$ ,  $^{238}\text{U}$ , and  $^{226}\text{Ra}$  in soil in all holes. The maximum measured concentration of  $^{232}\text{Th}$  in subsurface soil was 980 pCi/g (hole MJC33). Analysis of radionuclide concentrations with depth at two locations (holes MJC30 and MJC33) found evidence of contamination extending from the surface to depths of approximately 1.0 m and 2.0 m, respectively. Background levels of all three measured radionuclides were observed below these depths.

00055

### Indoor Survey Results

Alpha, beta-gamma and gamma-ray measurements. The results of the indoor measurements made at 464 Davison Avenue are provided in Table 7. Schematic views of the street level and basement floor plans of the house are given in Figs. 7 and 8, respectively, for use in correlation with the data presented in the tables.

The average gamma-ray exposure rate at 1 m above the floor surface in the upstairs portion of the house was determined to be 72  $\mu\text{R}/\text{h}$ . Downstairs, the average 1 m reading was found to be approximately 120  $\mu\text{R}/\text{h}$ . Both of these exposure levels exceed the NRC guidelines for continuous exposure to individuals (10 CFR 20). The maximum measured surface gamma-ray exposure rate was 280  $\mu\text{R}/\text{h}$ , occurring in the center of the recreation room in the basement. The source of these elevated gamma radiation levels throughout the house is the presence of the contaminated soil surrounding the house. The higher levels measured on the basement floor indicated that the contamination was also present underneath the concrete flooring and foundation (see following section on subsurface investigations).

Beta-gamma dose rates measured throughout the house were also found to be elevated, with an average value upstairs of 0.12 mrad/h and downstairs of 0.40 mrad/h. The beta component of the measured values was insignificant, indicating that the elevated dose rates are due to gamma radiation only. At several locations, both upstairs and downstairs, these levels exceeded the NRC guidelines for decontamination. Again, the source of these elevated radiation levels is the contaminated soil outside the structure.

Direct alpha activity on surfaces in the house reflected the presence of elevated radon levels throughout the structure (see following section). Alpha levels of up to 100 dpm/100  $\text{cm}^2$  were measured on wall and floor surfaces on the first floor, with a maximum value of 350 dpm/100  $\text{cm}^2$  measured downstairs. Several of the measurement locations exhibited alpha levels above the NRC guidelines for decontamination. Measurements of the long-lived alpha and beta-gamma activity on these surfaces indicate that these elevated surface contamination levels are due to plateout of short-lived radon progeny.

00056

Subsurface investigations. Two auger holes were drilled in the basement of the house to determine the extent of contamination below the concrete floor. The locations of these holes (MJC31 and MJC32) are shown in Fig. 8. A summary of the gamma-ray logging of these holes is given in Table 5, with graphical presentations provided in Appendix II. The analysis of subsurface soil samples is presented in Table 6. These results indicate that contaminated soil is present from the floor down to a depth of approximately 1.5 m at both locations. The maximum concentrations of measured radionuclides in subsurface soil were determined to be 1100 pCi/g for  $^{232}\text{Th}$ , 120 pCi/g for  $^{238}\text{U}$ , and 170 pCi/g of  $^{226}\text{Ra}$ .

Radon and radon daughter sampling. Preliminary radon and radon daughter measurements were made in the basement and upstairs area of the house to determine the approximate magnitude of this exposure pathway. These measurements are indicative of radon levels only at the instant of sampling and do not represent daily or annual averages. Further sampling would be required to determine the levels in the house for comparison with applicable guidelines.

The results of the radon and radon daughter measurements are presented in Table 8. Concentrations of  $^{222}\text{Rn}$  in air were measured at 38 pCi/L downstairs and 0.5 pCi/L upstairs. Radon daughter concentrations reflected this difference between the two levels of the house, with measured values of 0.20 to 0.35 WL downstairs and 0.0016 WL upstairs. The levels upstairs are in the range of normal background for the area, while the concentrations in the basement are up to 30 times these background values. The large difference between upstairs and downstairs radon concentrations is believed to be due to differences in ventilation conditions at the time of measurement. The basement was poorly ventilated and closed to outdoor air, while the upstairs was well ventilated. Changes in these conditions could result in significant variation in the indoor air concentrations.

7  
5  
5  
0  
0  
0

## SUMMARY

Summaries of the outdoor and indoor measurement results of the radiological survey conducted at 464 Davison Avenue are provided in Tables 9 and 10, respectively. These measurement results indicate that the surveyed property contains residual radioactive materials over the surface of the entire lot, down to an average depth of approximately 1 m (see Fig. 9). The contaminated materials surround the foundation of the house and are present under the concrete floor in the basement, down to depths of about 1.5 m. The primary contaminants in the soil are radionuclides of the  $^{232}\text{Th}$  decay chain, although elevated concentrations of  $^{238}\text{U}$  and its daughters were also measured. The total estimated volume of contaminated materials on the property is approximately 720 m<sup>3</sup>. This estimate is based on an average depth of contamination of 1.5 m in the front yard (approximately 180 m<sup>2</sup> area), 1.5 m under the house (120 m<sup>2</sup> area) and 1.0 m in the back yard (270 m<sup>2</sup> area) as broken down in Table 11. Due to the limited number of core holes on which these estimates are based, the total volume may exceed this estimate by as much as 30%.

Outdoors on the property, the average external gamma-ray exposure rate at 1 m above the surface was found to exceed the NRC guideline for continuous exposure (10 CFR 20) by more than a factor of two. All measured values of external gamma radiation outdoors were above the background level for the Maywood area. Analysis of surface soil from the yard found  $^{232}\text{Th}$  in concentrations ranging from three to several thousand times the background levels.

Inside the house, the average external gamma-ray exposure rate at 1 m above the floor surface was determined to be above the NRC guideline for continuous exposure (10 CFR 20). This elevated activity is due to the presence of the contaminated materials outdoors and underneath the foundation of the house. No residual radioactive materials were found to be located inside the structure. Elevated surface alpha activity was measured throughout the house, indicating that radon and radon daughter levels may be significantly above background, especially in the basement. The results of the preliminary radon monitoring conducted in the house confirmed that elevated radon and daughter levels exist, although continued sampling would be required to determine the annual average concentrations.

000558

08 1534

8

Using the results of this radiological survey, a preliminary evaluation of the potential exposure pathway for radiation exposures to residents at this location has been conducted. The four primary pathways from the type of contaminated materials found on the property are: (1) direct radiation exposure, (2) inhalation of radon and radon daughter products, (3) inhalation of resuspended radioactive particles, and (4) ingestion of radionuclides through food pathways. An evaluation of the first two pathways is provided in Appendix III. The latter two pathways are not considered to be significant at this property, under present conditions of property use. These pathways could only become significant if major changes in land use occur in the future. Based on conservative assumptions, preliminary estimates of the total risk of cancer from radiological conditions at the site are given in Appendix III. The estimated total increased risk due to radiation induced cancer for residents at 464 Davison Avenue was calculated to be 0.9%.<sup>8</sup> Thus, for a person living a lifetime at 464 Davison, the hypothetical average chance of dying from cancer would increase from 24.4% (the average for Bergen County, New Jersey in 1975<sup>9</sup>) to 25.3%.

6 5 5 9  
0 0 0 0

## REFERENCES

1. EG&G, *An Aerial Radiological Survey of the Stepan Chemical Company and Surrounding Area, Maywood, New Jersey*, EG&G Survey Report NRC-8109, April 1981.
2. Nuclear Regulatory Commission, memorandum from M. Campbell to J. D. Kinnerman, re: Records of Surveys of Private Homes in Maywood, New Jersey, Docket No. 40-8610, May 15, 1981.
3. W. A. Goldsmith to R. W. Barber, Letter of May 28, 1981, transmitting Action Plan and Radiological Survey Plan for Maywood, New Jersey.
4. R. W. Leggett, D. L. Anderson, D. J. Christian, W. D. Cottrell, D. J. Crawford, R. W. Doane, W. A. Goldsmith, F. F. Haywood, T. E. Myrick, W. H. Shinpaugh, and E. B. Wagner, *Radiological Survey of Properties in the Middlesex, New Jersey, Area*, DOE/EV-0005/1 (Supplement) ORNL-5680, March 1981.
5. U.S. Department of Energy, *Radiological Survey of the Middlesex Municipal Landfill, Middlesex, New Jersey*, DOE/EV-0005/20, April 1980.
6. A. C. George and A. J. Breslin, "The Distribution of Ambient Radon and Radon Daughters in Residential Buildings in the New Jersey - New York Area," *Proceedings of the Natural Radiation Environment III*, pp. 1272-93, CONF-780422 (Vol. 2), NTIS, 1980.
7. T. E. Myrick and B. A. Berven, *State Background Radiation Levels: Results of Measurements Taken During 1975-1979*, ORNL/TM-7343, Oak Ridge National Laboratory (in press).
8. J. Healy and W. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, New Jersey". Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories to W. E. Mott, Department of Energy, Washington, D.C., July 17, 1981.
9. U. S. Department of Health, Education and Welfare, *Vital Statistics of the United States - 1975, Volume II - Mortality, Part B*, Public Health Service, National Center for Health Statistics, (PHS) 78-1102, 1977.

090560  
0000

10

08 1534



Fig. 1. Front view of property at 464 Davison Avenue in Maywood, NJ

000561

08 1534

11

0 0 0 5 6 2

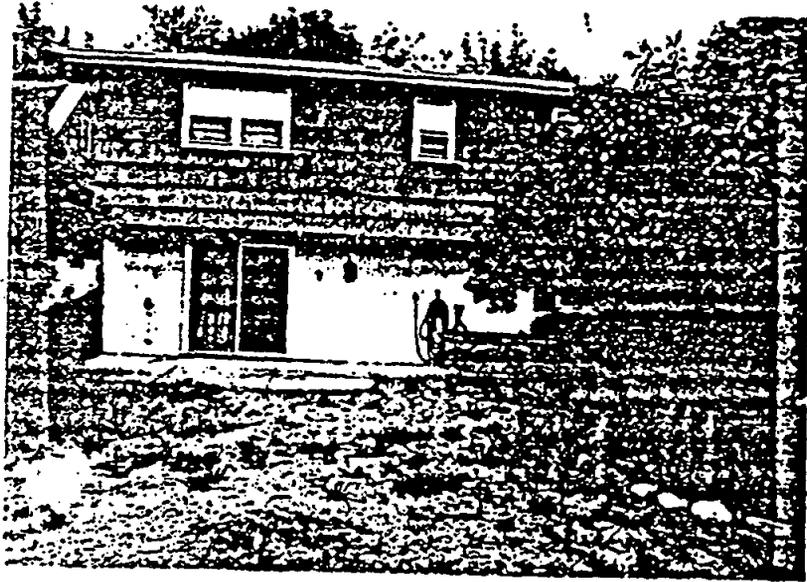


Fig. 2. Rear view of property at 464 Davison Avenue in Maywood, NJ

0 0 0 5 6 3

12

08 15 3 4

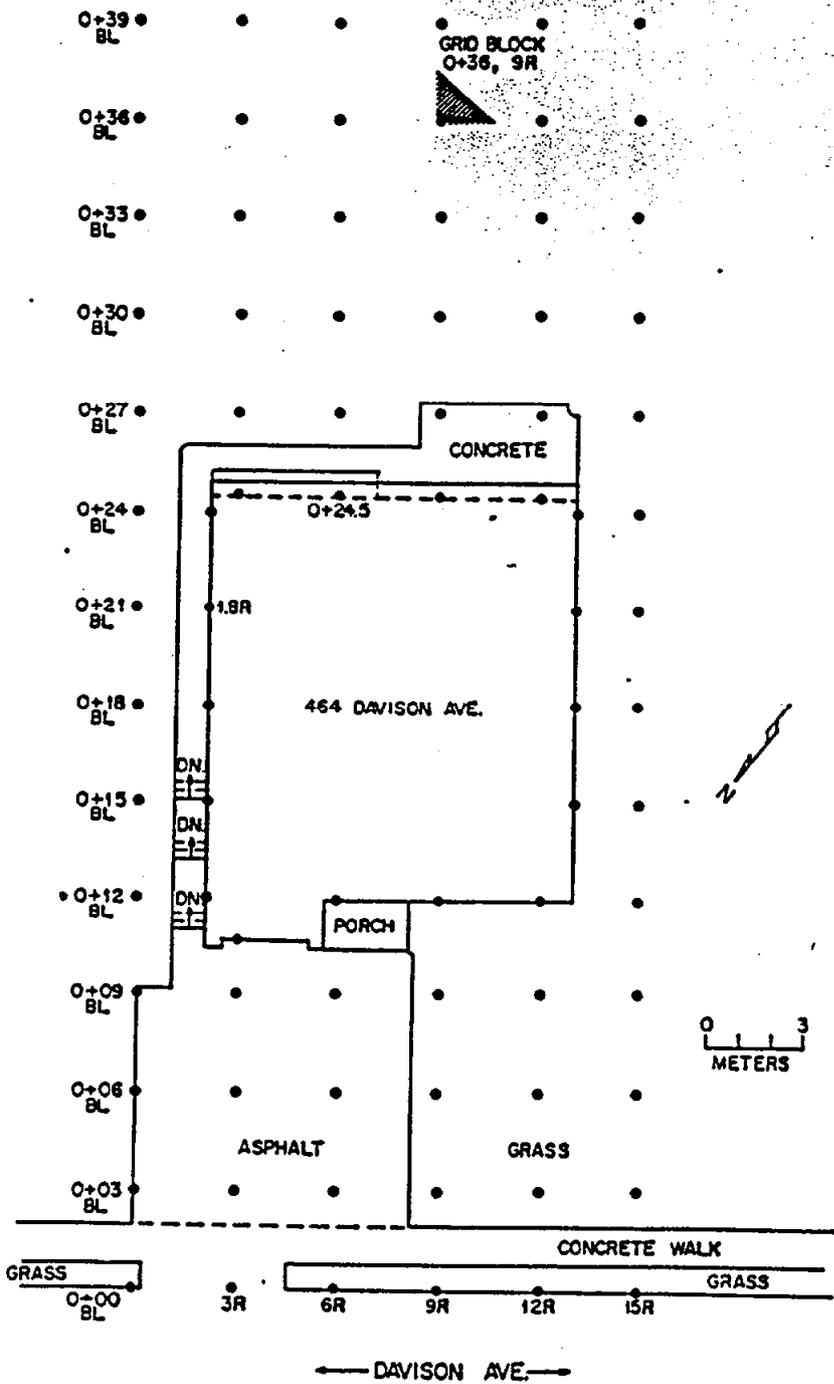


Fig. 3. Grid point and grid block locations at 464 Davison Avenue.

081534

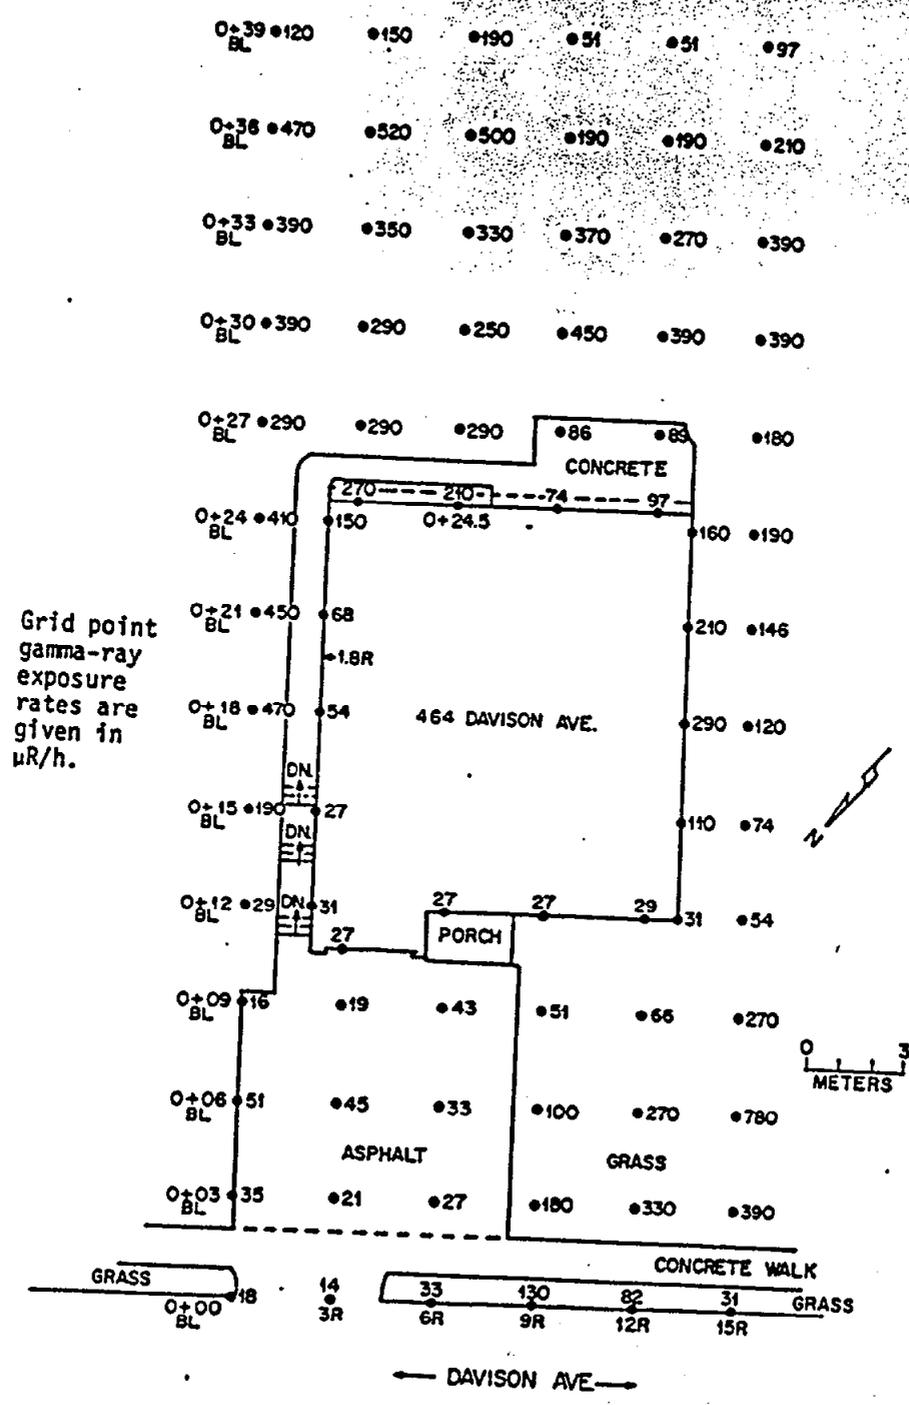


Fig. 4. External gamma-ray measurements at the ground surface at 464 Davison Avenue.

000564

000565

08 15 34

14

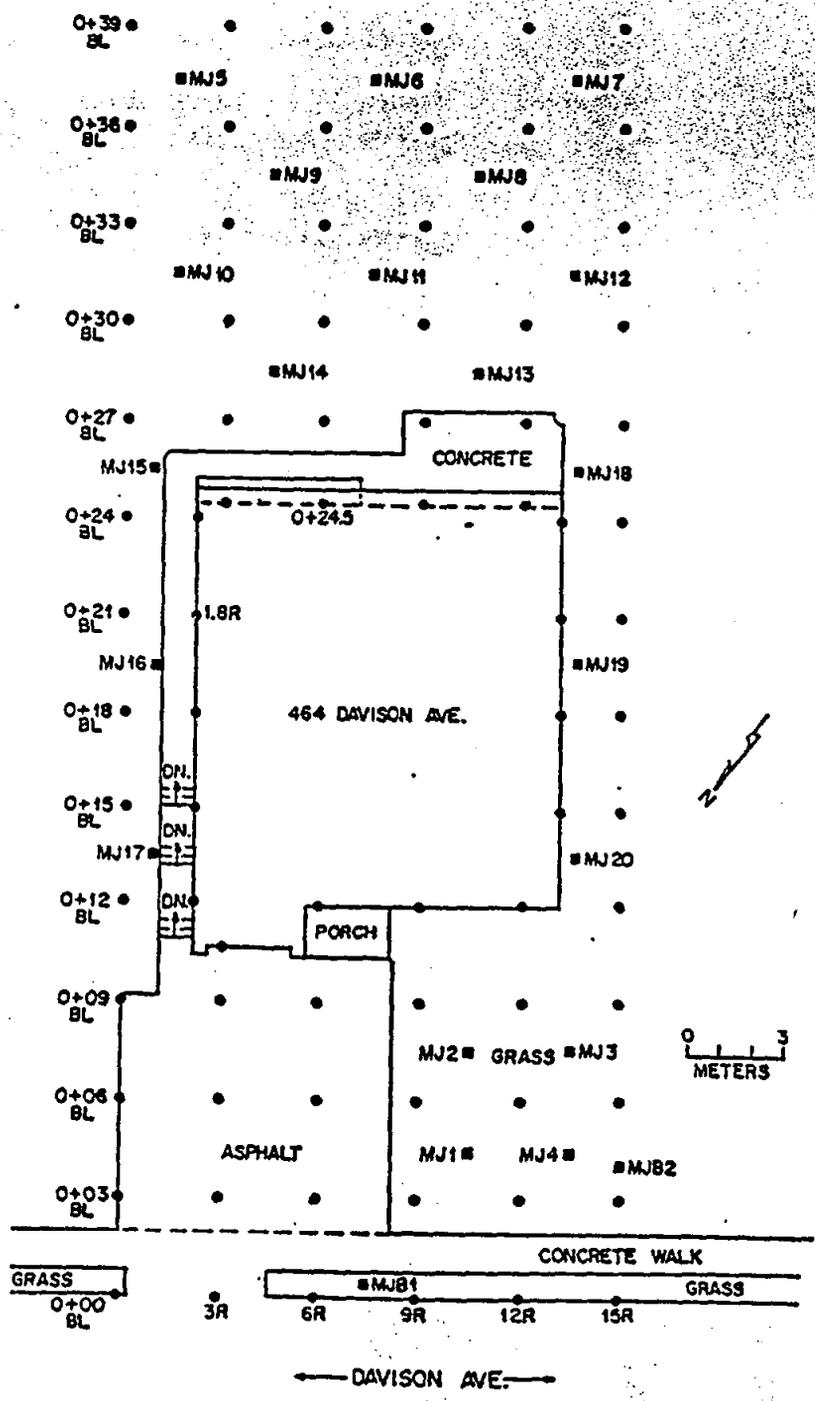


Fig. 5. Location of systematic and biased soil samples at 464 Davison Avenue.

000566

081534

15


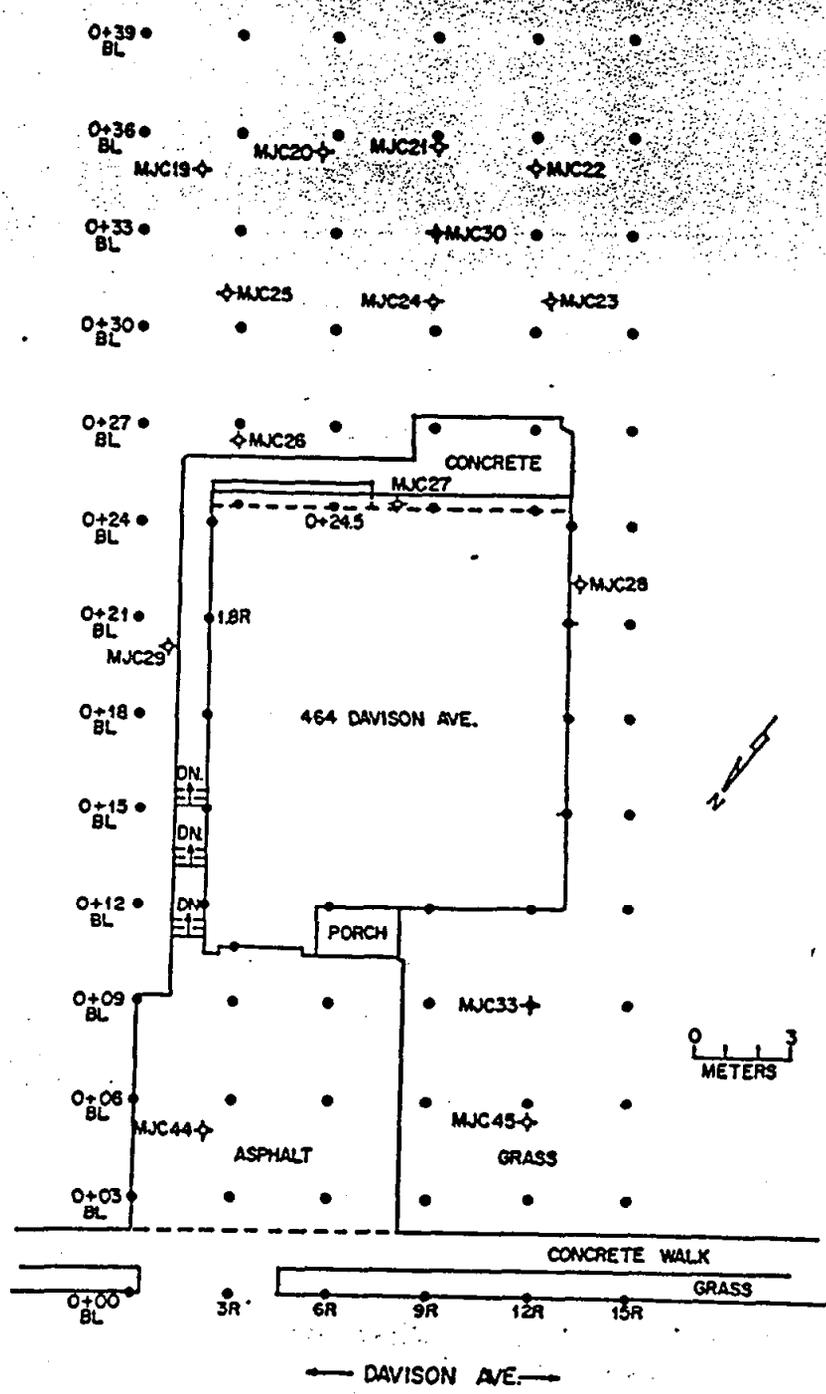



Fig. 6. Location of drill holes outdoors at 464 Davison Avenue.

000567

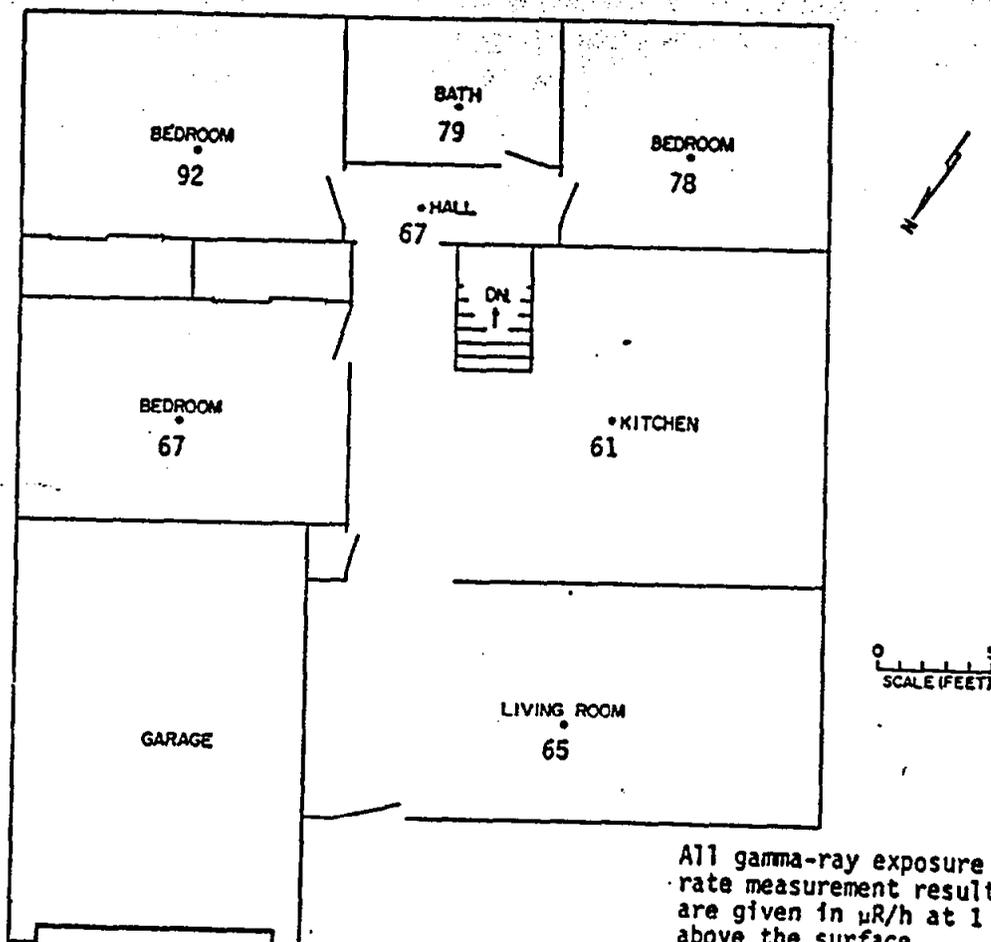

FIRST LEVEL  
464 DAVISON AVE.

Fig. 7. Schematic of the first level floor plan at 464 Davison Avenue showing external gamma-ray measurement results.

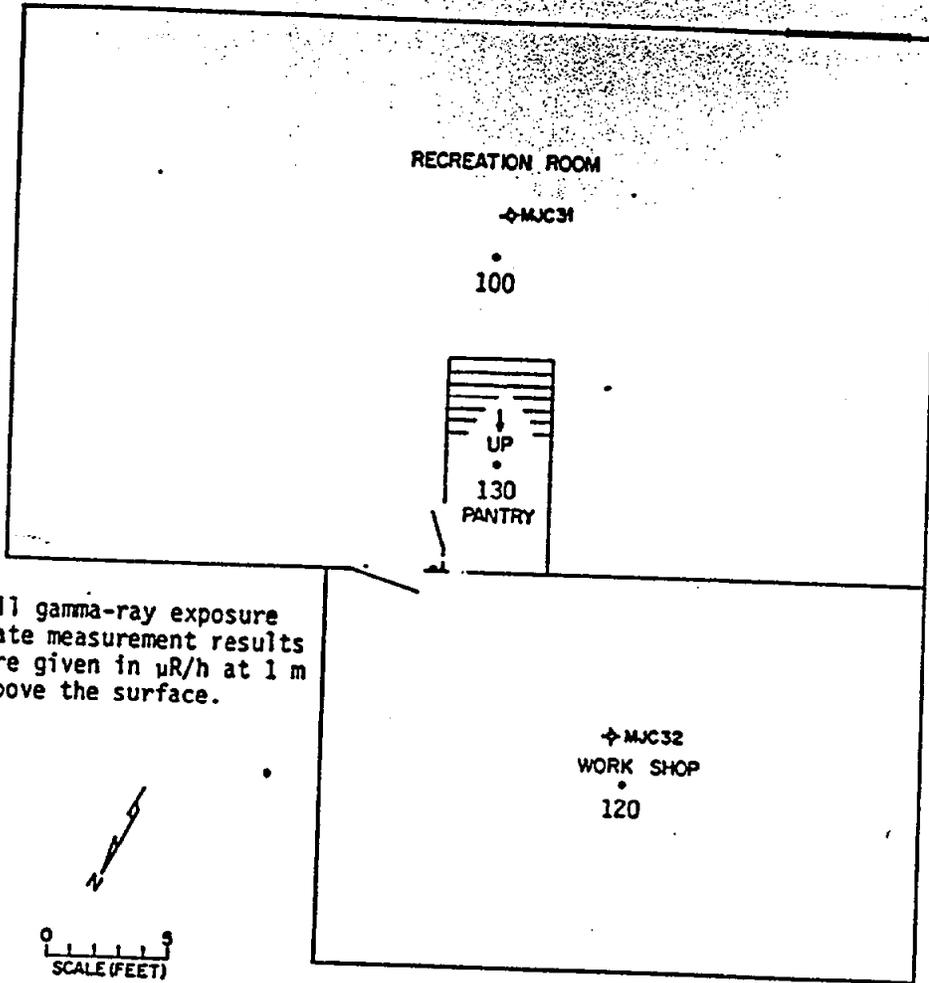

All gamma-ray exposure rate measurement results are given in  $\mu\text{R/h}$  at 1 m above the surface.

BASEMENT  
464 DAVISON AVE.

Fig. 8. Schematic of the basement floor plan at 464 Davison Avenue showing locations of drill holes and external gamma-ray measurement results.

000568

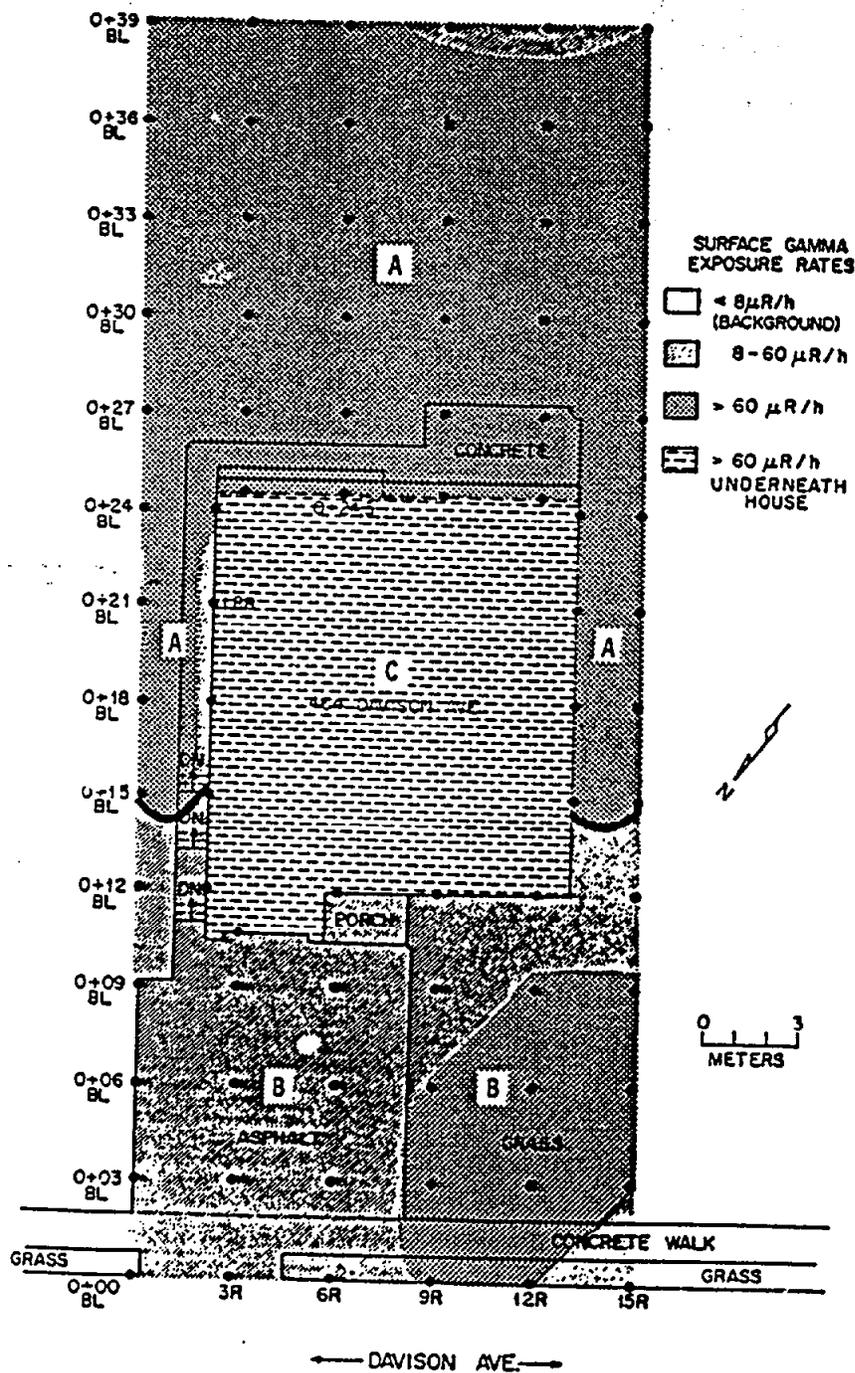


Fig. 9. Estimated extent of contaminated areas at 464 Davison Avenue

000569

Table 1. A summary of applicable radiation guidelines

Mode of exposure	Exposure conditions	Guideline value	Guideline source
1. External gamma radiation	Continuous exposure to individual in general population (whole body)	60 $\mu$ R/h	Nuclear Regulatory Commission (NRC) - Standards for Protection Against Radiation (10 CFR 20.105)
2. Surface alpha contamination	$^{226}\text{Ra}$ contamination fixed on surfaces	100 dpm/100 $\text{cm}^2$	NRC Guidelines for Decontamination of Facilities and Equipment Prior to Release for Unrestricted Use or Termination of Licenses for By-product, Source, or Special Nuclear Material (Adapted from NRC Reg. Guide 1.86)
	Removable $^{226}\text{Ra}$ contamination	20 dpm/100 $\text{cm}^2$	
3. Surface beta contamination	Removable beta-gamma emitters	1000 dpm/100 $\text{cm}^2$	Same as number 2
4. Beta-gamma dose rates	Average dose rate on an area no greater than 1 $\text{m}^2$	0.20 mrad/h	Same as number 2
	Maximum dose rate in any 100 $\text{cm}^2$ area	1.0 mrad/h	Same as number 2
5. Exposure to radon	Maximum permissible concentration of $^{222}\text{Rn}$ in air in unrestricted areas	3.0 pCi/L	NRC 10 CFR 20.103, Appendix B, Table II
6. Radionuclides in water	Maximum contaminant level for combined $^{226}\text{Ra}$ and $^{228}\text{Ra}$ in drinking water	5 pCi/L	EPA Interim Standards 40 CFR 141.15
	Maximum permissible concentration of the following radionuclides in water for unrestricted areas $^{226}\text{Ra}$ $^{238}\text{U}$ $^{230}\text{Th}$ $^{210}\text{Pb}$	30 pCi/L 40,000 pCi/L 2,000 pCi/L 100 pCi/L	NRC 10 CFR 20.103 Appendix B, Table II
7. Airborne $^{222}\text{Rn}$ progeny	Remedial action indicated if $^{222}\text{Rn}$ progeny exceed this concentration because of uranium mill tailings under or around the structure	0.01 ML	10 CFR 712.7

19

081534

000570

Table 2. Background radiation levels for the northern New Jersey area.

Type of radiation measurement or sample	Radiation level or radionuclide concentration
Gamma-ray exposure rate at 1 m above floor or ground surface ( $\mu\text{R/h}$ )	8 <sup>a</sup>
Direct alpha activity on indoor floor or wall surface (dpm/100 cm <sup>2</sup> )	26
Transferable alpha activity on indoor floor or wall surface (dpm/100 cm <sup>2</sup> )	10
Transferable beta-gamma activity on indoor floor or wall surface (dpm/100 cm <sup>2</sup> )	20
Beta-gamma dose rate activity on ground, floor and wall surfaces (mrad/h)	0.01 - 0.03
Indoor radon concentration (pCi/L)	
Basement	1.7 <sup>b</sup>
Upstairs	0.8 <sup>b</sup>
Indoor radon daughter concentration (WL)	
Basement	0.008 <sup>b</sup>
Upstairs	0.004 <sup>b</sup>
Concentration of radionuclides in soil (pCi/g)	
<sup>238</sup> U	0.9 <sup>c</sup>
<sup>235</sup> U	0.9 <sup>c</sup>
<sup>226</sup> Ra	0.9 <sup>c</sup>

<sup>a</sup>Reference 5.<sup>b</sup>Reference 6.<sup>c</sup>Reference 7.1  
2  
3  
4  
5  
6  
7  
8  
9  
0  
0  
0  
5  
7  
1

Table 3. Outdoor measurements at 464 Davison Avenue

Grid <sup>a</sup> location	Grid point measurements <sup>b</sup>			Grid block measurements <sup>c</sup>		
	Gamma exposure at 1 m ( $\mu$ R/h)	Gamma exposure at the surface ( $\mu$ R/h)	Beta-gamma dose rate at 1 cm above the surface <sup>e</sup> (mrad/h)	Maximum gamma exposure at 1 m <sup>d</sup> ( $\mu$ R/h)	Maximum gamma exposure at the surface <sup>d</sup> ( $\mu$ R/h)	Beta-gamma dose rate at maximum 1 cm above the surface <sup>e</sup> (mrad/h)
0-00, 8L	18	18	0.03	33	31	
0-03, 8L	23	35	0.03	68	120	
0-06, 8L	49	51	0.1	54	84	
0-09, 8L	31	16	0.02	39	150	
0-12, 8L	33	29	0.04	58	88	
0-15, 8L	64	190	0.2	140	340	
0-18, 8L	140	470	0.7	140	340	
0-21, 8L	180	450	0.7	160	390	
0-24, 8L	180	210	0.6	190	390	
0-27, 8L	190	290	0.5	270	390	
0-30, 8L	230	390	0.8	370	580	
0-33, 8L	260	390	0.8	210	440	
0-36, 8L	250	470	1	270	440	
0-39, 8L	120	120	0.2			
0-12, 1.8R	29	31				
0-15, 1.8R	39	27				
0-18, 1.8R	68	54				
0-21, 1.8R	93	68				
0-24, 1.8R	120	150				
0-00, 3R	18	14	0.02			
0-03, 3R	29	21	0.04	43	43	
0-06, 3R	43	45	0.09	35	43	
0-09, 3R	23	19	0.03			
0-11, 3R	23	27	0.06			
0-24, 3R	180	270	0.4	190	330	
0-27, 3R	250	290	0.6	290	390	0.8
0-30, 3R	270	290	0.6	290	390	
0-33, 3R	290	350	0.8	290	490	
0-36, 3R	310	520	1	290	680	
0-39, 3R	180	150	0.3			
0-00, 6R	35	33	0.04	120	370	
0-03, 6R	47	27	0.04	310	440	
0-06, 6R	39	33	0.04	250	290	

21

081534

0 0 0 5 7 2

Table 3. (continued)

Grid <sup>a</sup> location	Grid point near			Grid block measurements <sup>c</sup>		
	Gamma exposure at 1 m ( $\mu$ R/h)	Gamma exposure <sup>d</sup> at the surface ( $\mu$ R/h)	Beta-gamma dose rate at 1 cm above the surface <sup>e</sup> (mrad/h)	Maximum gamma exposure at 1 m <sup>f</sup> ( $\mu$ R/h)	Maximum gamma exposure at the surface <sup>g</sup> ( $\mu$ R/h)	Beta-gamma dose rate at maximum 1 cm above the surface <sup>h</sup> (mrad/h)
0-09, 6R	34	43	0.06			
0-12, 6R	47	27	0.03	58	100	
0-24.5, 6R	150	210	0.4			
0-27, 6R	58	290	0.6	350	490	
0-30, 6R	270	250	0.6			
0-33, 6R	290	330	0.9			
0-36, 6R	330	500	1	290	490	
0-39, 6R	180	190	0.5			
0-00, 9R	78	130	0.3	310	390	
0-03, 9R	190	180	0.3	490	1300	
0-06, 9R	350	100	0.2			
0-09, 9R	62	51	0.06	68	78	
0-12, 9R	41	27	0.04			
0-24.5, 9R	78	74	0.09			
0-27, 9R	150	86	0.1	330	480	
0-30, 9R	310	450	1	370	630	
0-33, 9R	310	370	0.9			
0-36, 9R	180	190	0.5			
0-39, 9R	88	51	0.2			
0-00, 12R	72	82	0.06	290	780	
0-03, 12R	330	330	0.9	920	~5000 <sup>i</sup>	
0-06, 12R	310	270	0.6	490	840	
0-09, 12R	58	66	0.06	120	258	
0-12, 12R	43	29	0.04			
0-24.5, 12R	85	97	0.1			
0-27, 12R	150	89	0.1	340	508	
0-30, 12R	340	390	0.9	350	680	
0-33, 12R	250	270	0.7			
0-36, 12R	340	190	0.5			
0-39, 12R	88	51	0.2			
0-12, 12.8R	47	31	0.03	88	148	
0-15, 12.8R	88	110	0.1	140	230	
0-18, 12.8R	130	290	0.6	97	230	
0-21, 12.8R	100	210	0.5	150	290	

22

081534

000573

Table 3. (continued)

Grid <sup>a</sup> location	Grid point measurements <sup>b</sup>			Grid block measurements <sup>c</sup>		
	Gamma exposure at 1 m ( $\mu$ R/h)	Gamma exposure at the surface <sup>d</sup> ( $\mu$ R/h)	Beta-gamma dose rate at 1 cm above the surface <sup>e</sup> (mrad/h)	Maximum gamma exposure at 1 m ( $\mu$ R/h)	Maximum gamma exposure at the surface <sup>f</sup> ( $\mu$ R/h)	Beta-gamma dose rate at maximum 1 cm above the surface <sup>g</sup> (mrad/h)
0-24, 12.8R	110	160	0.3			
0-12, 13R	47	31	0.03	88	140	
0-15, 13R	88	110	0.1	140	230	
0-18, 13R	130	290	0.6	97	230	
0-21, 13R	100	210	0.5	146	290	
0-24, 13R	110	160	0.3			
0-00, 15R	43	31	0.08			
0-03, 15R	290	390	2			
0-06, 15R	390	780	3			
0-09, 15R	120	270	0.9			
0-12, 15R	47	54	0.1			
0-15, 15R	70	74	0.1			
0-18, 15R	88	120	0.1			
0-21, 15R	97	146	0.4			
0-24, 15R	120	190	0.5			
0-27, 15R	130	180	0.5			
0-30, 15R	210	390	1			
0-33, 15R	210	390	1			
0-36, 15R	140	210	0.4			
0-39, 15R	68	97	0.2			

<sup>a</sup>Grid location is shown in Fig. 3.

<sup>b</sup>Grid point areas are discrete measurements at each grid point.

<sup>c</sup>Grid block measurements are obtained by a gamma-ray scan of entire block.

<sup>d</sup>These values are shown in Fig. 4.

<sup>e</sup>Absence of a value indicates no measurement was taken.

<sup>f</sup>Measured by a Geiger-Mueller beta-gamma instrument (see Ref. 4).

Table 4. Results of radionuclide analyses of surface soil samples from 464 Davison Avenue

Sample <sup>a</sup>	Location <sup>b</sup>	Radionuclide concentration (pCi/g)		
		<sup>232</sup> Th <sup>c</sup>	<sup>238</sup> U <sup>d</sup>	<sup>226</sup> Ra <sup>c</sup>
MJ1	0+4.5, 10.5R	160 ± 2	8.4	95 ± 5
MJ2	0+7.5, 10.5R	2.7 ± 0.1	0.87	1.0 ± 0.06
MJ3	0+7.5, 13.5R	51 ± 1.0	4.3	18 ± 0.5
MJ4	0+4.5, 13.5R	1200 ± 200	60	1200 ± 30
MJ5	0+37.5, 1.5R	290 ± 40	18	56 ± 6
MJ6	0+37.5, 7.5R	200 ± 40	19	55 ± 2
MJ7	0+37.5, 13.5R	110 ± 20	9.0	17 ± 2
MJ8	0+34.5, 10.5R	190 ± 70	15	32 ± 2
MJ9	0+34.5, 4.5R	370 ± 60	22	64 ± 9
MJ10	0+31.5, 1.5R	230 ± 40	16	65 ± 2
MJ11	0+31.5, 7.5R	280 ± 40	24	47 ± 4
MJ12	0+31.5, 13.5R	430 ± 60	32	83 ± 2
MJ13	0+28.5, 10.5R	160 ± 20	13	37 ± 4
MJ14	0+28.5, 4.5R	200 ± 30	14	84 ± 5
MJ15	0+25.5, 1.2R	220 ± 30	17	48 ± 2
MJ16	0+19.5, 1R	93 ± 10	8.7	19 ± 1
MJ17	0+13.5, 1R	60 ± 9	6.7	18 ± 1
MJ18	0+25.5, 13.5R	140 ± 20	10	28 ± 1
MJ19	0+19.5, 13.5R	82 ± 10	7.1	15 ± 1
MJ20	0+13.5, 13.5R	6.0 ± 0.2	1.2	1.5 ± 1.2
MJB1	0+0.5, 7.5R	440 ± 70	23	150 ± 9
MJB2	0+0.4, 15R	5500 ± 600	140	1900 ± 50

<sup>a</sup>MJ is a systematic surface soil sample; MJB is a biased surface soil sample. All samples were obtained from the top 15 cm of the soil surface.

<sup>b</sup>Location is shown on Fig. 5.

<sup>c</sup>Indicated counting error is at the 95% confidence interval (±2σ).

<sup>d</sup>Total error on measurement results is less than ±3% error (95% confidence level).

000575

Table 5. Summary of gamma logging of auger holes at 464 Davison Avenue

Hole	Location <sup>a</sup>	Depth of hole (m)	Estimated extent of contaminated soil (m)	Depth of maximum contamination (m)	Measurement at depth of maximum contamination <sup>b</sup> (cpm)
MJC19	0+35, 2R	1.07	0-1.2	0.15	58,000
MJC20	0+35.5, 5.7R	1.52	0-1.5	0.30	130,000
MJC21	0+35.8, 9R	1.52	0-0.91	0.15	24,000
MJC22	0+35, 12R	1.52	0-0.76	0.15	17,000
MJC23	0+37, 12R	1.52	0-1.14	0.30	100,000
MJC24	0+31, 9R	1.52	0-1.14	0.30	79,000
MJC25	0+31, 2.5R	1.68	0-1.14	0.30	38,000
MJC26	0+26.5, 3R	1.37	>1.37	0.61	99,000
MJC27	0+25.5, 8R	1.22	>1.22	0.76	89,000
MJC28	0+22, 13R	1.22	>1.22	0.46	49,000
MJC29	0+20, 1R	1.37	0-1.37	0.46	50,000
MJC30	0+33, 9R	1.07	>1.07	0.15	91,000
MJC31	South room	1.07	>1.07	0.46	c
MJC32	Workshop	1.07	>1.07	0.53	c
MJC33	0+09, 12R	1.07	>1.07	0.91	160,000
MJC44	0+05, 2R	2.44	0-1.68	0.46	160,000
MJC45	0+05, 12R	1.37	>1.37	0.30	250,000

<sup>a</sup>Location of these auger holes is shown on Fig. 6.

<sup>b</sup>Background for this measurement is typically  $1200 \pm 700$  counts per minute (cpm).

<sup>c</sup>Unshielded gamma scintillator used for measurement.

25

081534

0 0 0 5 7 6

Table 6. Results of radionuclide analyses of subsurface soil samples from 464 Davison Avenue

Sample	Location <sup>a</sup>	Depth (cm)	Radionuclide concentration (pCi/g)		
			<sup>232</sup> Th <sup>b</sup>	<sup>238</sup> U <sup>c</sup>	<sup>226</sup> Ra <sup>b</sup>
MJC19A	0+35, 2R	0-30	230 ± 4	15	38 ± 2
MJC19B	0+35, 2R	30-61	140 ± 20	9.6	24 ± 0.5
MJC19C	0+35, 2R	61-91	37 ± 5	3.6	5.2 ± 0.3
MJC20	0+35.5, 5.7R	0-30	640 ± 100	32	97 ± 10
MJC21A	0+35.8, 9R	0-30	80 ± 8	7.0	15 ± 1
MJC21B	0+35.8, 9R	30-61	9.3 ± 0.2	2.2	2.7 ± 0.08
MJC21C	0+35.8, 9R	61-91	3.8 ± 0.06	1.6	1.3 ± 0.04
MJC22	0+35, 12R	0-30	130 ± 20	9.3	22 ± 2
MJC23	0+31, 12.2R	0-30	430 ± 60	38	72 ± 10
MJC24	0+31, 9R	0-30	450 ± 8	42	76 ± 8
MJC25	0+31, 2.5R	0-30	140 ± 20	8.1	40 ± 2
MJC26	0+26.5, 3R	0-30	220 ± 30	17	57 ± 2
MJC27	0+25.5, 8R	0-30	170 ± 30	18	32 ± 6
MJC28	0+22, 13R	0-30	80 ± 10	7.8	14 ± 8
MJC29	0+20, 1R	0-30	140 ± 20	11	26 ± 3
MJC30A	0+33, 9R	0-30	300 ± 40	24	62 ± 7
MJC30B	0+33, 9R	30-61	58 ± 13	5.8	10 ± 0.8
MJC30C	0+33, 9R	61-91	3.2 ± 0.3	1.3	1.4 ± 0.2
MJC30D	0+33, 9R	91-120	1.5 ± 0.06	0.92	0.92 ± 0.05
MJC30E	0+33, 9R	120-150	3.4 ± 0.08	1.1	1.2 ± 0.05
MJC30F	0+33, 9R	150-180	1.0 ± 0.04	0.68	0.67 ± 0.04
MJC30G	0+33, 9R	180-210	3.0 ± 0.06	0.73	0.96 ± 0.04
MJC30H	0+33, 9R	210-240	0.77 ± 0.03	0.45	0.49 ± 0.03
MJC31A	Basement	10-30	590 ± 6	53	86 ± 4
MJC31B	Basement	30-61	800 ± 100	69	120 ± 10
MJC31C	Basement	61-91	10 ± 0.2	1.8	1.1 ± 0.04
MJC31D	Basement	91-120	0.94 ± 0.04	0.68	0.6 ± 0.02
MJC31E	Basement	120-150	5.8 ± 0.7	1.5	13 ± 0.4
MJC31F	Basement	150-180	2.0 ± 0.07	0.81	0.81 ± 0.05
MJC32A	Basement	10-30	75 ± 8	6.6	14 ± 1
MJC32B	Basement	30-61	1100 ± 16	120	170 ± 20

000577

Table 6. (continued)

Sample	Location <sup>a</sup>	Depth (cm)	Radionuclide concentration (pCi/g)		
			<sup>232</sup> Th <sup>b</sup>	<sup>238</sup> U <sup>c</sup>	<sup>226</sup> Ra <sup>b</sup>
MJC32C	Basement	61-91	230 ± 30	17	34 ± 3
MJC32D	Basement	91-120	5.0 ± 0.7	1.3	1.3 ± 0.1
MJC32E	Basement	120-150	8.2 ± 0.1	1.5	1.7 ± 0.06
MJC32F	Basement	150-180	1.1 ± 0.03	0.61	0.61 ± 0.02
MJC33A	0+09, 12R	0-30	10 ± 0.2	1.3	3.8 ± 0.08
MJC33B	0+09, 12R	30-61	110 ± 10	7.3	26 ± 0.51
MJC33C	0+09, 12R	61-76	590 ± 100	38	230 ± 10
MJC33E	0+09, 12R	120-150	450 ± 60	33	75 ± 4
MJC33F	0+09, 12R	150-180	230 ± 40	17	54 ± 3
MJC33G	0+09, 12R	180-210	980 ± 10	63	280 ± 30
MJC33H	0+09, 12R	210-230	1.2 ± 0.05	1.6	0.71 ± 0.03
MJC33I	0+09, 12R	230-260	1.2 ± 0.04	1.0	0.62 ± 0.03
MJC33J	0+09, 12R	260-290	1.3 ± 0.05	1.4	0.74 ± 0.05

<sup>a</sup>Location is shown on Fig. 6.

<sup>b</sup>Indicated counting error is at the 95% confidence level ( $\pm 2\sigma$ ).

<sup>c</sup>Total error on measurement results is less than  $\pm 3\%$  error (95% confidence level).

Table 7. Indoor measurements at 464 Davison Avenue

Location <sup>a</sup>	External gamma exposure rate ( $\mu\text{R/h}$ )			Beta-gamma dose rate at 1 m (mrad/h)		Direct alpha activity on surface (dpm/100 $\text{cm}^2$ )		Transferable alpha activity/transferable beta-gamma activity (dpm/100 $\text{cm}^2$ )
	Center of room at 1 m	Surface maximum	Location of maximum	Center of room	Location of gamma maximum	Average	Maximum	
<u>Street level</u>								
Living Room	65	83	General	0.2	b	<26	39	b
Kitchen	61	83	West side of room	0.1	b	31	78	<10/<20
Southwest bedroom	78	98	General	0.1	b	<26	78	<10/<20
Southeast bedroom	92	140	South side of room	0.2	b	<26	65	<10/<20
East bedroom	67	100	East side of room	0.1	b	36	78	<10/<20
Bathroom	79	110	General	0.1	b	56	78	<10/<20
Hall	67	110	South end of hall	0.1	0.1	<26	<26	b
Garage	c	41	East side of room	0.05	b	48	100	b
<u>Basement</u>								
South room	100	280	Center of room	0.4	0.4	200	230	b
North room	120	260	East side of room	0.4	0.4	270	356	<10/<20
Pantry (under stairs)	130	c	General	b	c	b	b	b

<sup>a</sup>Location shown on Figs. 7 and 8.

<sup>b</sup>Not measured.

<sup>c</sup>Not accessible.

28

081534

0 0 0 5 7 9

Table 8. Radon and radon daughter measurements at 464 Davison Avenue

Location	Concentration of $^{222}\text{Rn}$ in air (pCi/L)	Radon daughter concentration in air (WL)	Concentration of radionuclides in air (pCi/L)				
			$^{218}\text{Po}$ (Ra A)	$^{214}\text{Pb}$ (Ra B)	$^{214}\text{Bi}$ (Ra C)	$^{212}\text{Pb}$ (Th B)	$^{212}\text{Bi}$ (Th C)
<u>Basement</u>							
Recreation room	38.5	0.35	56	35	29	0.30	0.35
Workshop	a	0.20	37	21	16	0.20	0.22
<u>Upstairs</u>							
Living room	0.52	0.0016	0.47	0.15	0.11	0.013	b

<sup>a</sup>Not measured.

<sup>b</sup>Below minimum detectable concentration (MDC).

29

08-1534

0 0 0 5 8 0

Table 9. Summary of outdoor measurements and sample results at 464 Davison Avenue

Measurement or sample type	Number of measurements/samples	Range	Mean	Biased readings <sup>a</sup>
<u>Grid point measurements</u>				
External gamma-ray exposure rate at 1 m ( $\mu\text{R}/\text{h}$ )	87	18-390	140	
External gamma-ray exposure rate at the surface ( $\mu\text{R}/\text{h}$ )	87	14-780	180	
Beta-gamma dose rate at 1 cm above the surface (mrad/h)	82	0.02-3.0	0.4	
<u>Systematic surface soil samples</u>				
<sup>232</sup> Th concentration (pCi/g)	20	2.7-1200	220	
<sup>238</sup> U concentration (pCi/g)	20	0.87-32	15	
<sup>226</sup> Ra concentration (pCi/g)	20	1.0-1200	99	
<u>Biased measurements<sup>a</sup></u>				
Maximum external gamma-ray exposure rate at 1 m ( $\mu\text{R}/\text{h}$ )				920
Maximum external gamma-ray exposure rate at surface ( $\mu\text{R}/\text{h}$ )				5000
Maximum concentration of <sup>232</sup> Th in surface soil (pCi/g)				5500
Maximum concentration of <sup>232</sup> Th in subsurface soil (pCi/g)				980
Average depth of contaminated soil (m)				1.0

<sup>a</sup>Biased measurements included gamma-ray scanning of the entire yard, surface soil sampling at biased locations, and subsurface investigations through the use of augered holes.

000581

Table 10. Summary of indoor measurements and sample results at 464 Davison Avenue

Measurement or sample type	Number of measurements/samples	Range	Mean	Biased readings <sup>a</sup>
<u>Systematic Room Surveys</u>				
External gamma-ray exposure rate at 1 m ( $\mu$ R/h)	10	61-130	86	
Beta-gamma dose rate at 1 cm above surface (mrad/h)	10	0.05-0.4	0.18	
Direct alpha activity on surface (dpm/100 cm <sup>2</sup> )	10	<26-270	75	
<u>Biased Measurements<sup>a</sup></u>				
Maximum external gamma-ray exposure rate at 1 m ( $\mu$ R/h)				280
Maximum beta-gamma dose rate at 1 cm (mrad/h)				0.4
Maximum direct alpha activity on surface (dpm/100 cm <sup>2</sup> )				350
Transferable alpha activity/transferable beta-gamma activity (dpm/100 cm <sup>2</sup> )				<10/<20
Maximum <sup>222</sup> Rn concentration in air ( $\mu$ Ci/L)				39
Maximum <sup>222</sup> Rn daughter concentration in air (WL)				0.35
Average depth of contaminated soil under basement floor (m)				1.5
Maximum <sup>232</sup> Th concentration in subsurface soil (pCi/g)				1100

<sup>a</sup>Biased measurements included gamma-ray scanning of each room, measurement of beta-gamma dose rates at locations of elevated gamma levels, random measurements of direct alpha and transferable alpha and beta-gamma activity on interior surfaces, subsurface investigations through auger holes, and measurements of indoor radon and radon daughter concentrations.

Table 11. Summary of measurement results in contaminated areas at 464 Davison Avenue

Location <sup>a</sup>	Measurement type	Measurement result
Area A (back yard)	Maximum external gamma-ray exposure rate at surface ( $\mu\text{R/h}$ )	680
	Range of $^{232}\text{Th}$ concentrations measured in surface soil (pCi/g)	110-430
	Maximum $^{232}\text{Th}$ concentration measured in subsurface soil (pCi/g)	640
	Estimated areal extent of contamination ( $\text{m}^2$ )	270
	Estimated average depth of contamination (m)	1.0
	Estimated total volume of contaminated material <sup>b</sup> ( $\text{m}^3$ )	270
Area B. (underneath house)	Maximum external gamma-ray exposure rate at surface ( $\mu\text{R/h}$ )	260
	Maximum $^{232}\text{Th}$ concentration measured in subsurface soil (pCi/g)	1100
	Estimated areal extent of contamination ( $\text{m}^2$ )	120
	Estimated average depth of contamination (m)	1.5
	Estimated total volume of contaminated material <sup>b</sup> ( $\text{m}^3$ )	180
Area C (front yard)	Maximum external gamma-ray exposure rate at surface ( $\mu\text{R/h}$ )	5000
	Range of $^{232}\text{Th}$ concentration measured in surface soil (pCi/g)	2.7-5500
	Maximum $^{232}\text{Th}$ concentration in subsurface soil (pCi/g)	980
	Estimated areal extent of contamination ( $\text{m}^2$ )	180
	Estimated average depth of contamination (m)	1.5
	Estimated total volume of contaminated material <sup>b</sup> ( $\text{m}^3$ )	270

<sup>a</sup>For area designation see Fig. 9.

<sup>b</sup>Volume estimates are based on a correlation of surface measurements and subsurface investigations using a reasonable number of drill holes. The exact shape of the contaminated regions cannot be precisely determined by this type of investigation. Actual irregular shapes have therefore been approximated by the most reasonable regular geometric shape (e.g., cylinder, or rectangular prism).

000583

08-1534

33

APPENDIX I

ACTION AND SURVEY PLAN,  
MAYWOOD, NEW JERSEY

000584

**ACTION PLAN FOR PRIVATE PROPERTY SURVEYS IN MAYWOOD, NEW JERSEY****Purpose**

This plan defines the ORNL activities to survey private properties in Maywood, New Jersey, which are believed to be contaminated with residues from thorium processing operations at the former Maywood Chemical Company. There are three objectives of these surveys: (1) define the current radiological status of each property, (2) define the sources of radiation exposures on each property and estimate the volume of material involved, and (3) prepare an exposure evaluation, comparing radiation exposures with guidelines.

**Approach**

Initially, ORNL will review all available data relevant to the properties involved. A generic survey plan will then be developed for conduct of private property surveys and will be modified in the field as needed to characterize the properties and radiation sources. Following approval of this approach, ORNL will conduct the radiological surveys at each private property for which consent can be obtained. The findings of each field survey will be prepared and submitted to DOE as a preliminary report; a final report on each property will be submitted after environmental samples are analyzed. The required work is separated into individual tasks which may be summarized as follows:

**Task 1. Review of Available Data**

Data provided by ESED have been reviewed and incorporated in the survey planning process. Other data have been volunteered by ORAU, and by the New Jersey Department of Environmental Protection. It is anticipated that additional contacts will be made with NRC Region I personnel. Historical information about each property will be obtained from brief home owner/occupant interviews.

000585

### Task 2. Preparation of Survey Plan

The radiological survey plan for private properties will be developed after the available data are reviewed. Ordinarily, a site visit would precede this task. However, due to the immediate need for the surveys, a general plan will be prepared based on prior experience. This plan will be modified in the field as needed to fully characterize any property.

### Task 3. Implementation of Radiological Surveys

Radiological surveys of private properties will be conducted according to the approved survey plan. Surveys will only be conducted on properties for which consent can be obtained. Outdoor drilling will be done on an as-needed basis. Drilling or coring through basement floors will only be done as a last resort for obtaining necessary data about subsurface radioactivity profiles.

### Task 4. Gamma-Ray Scans of Adjacent Properties

Because of the crescent shapes of the isopleths in the EG&G aerial survey and the possibility of spill-over contamination, it is recommended that gamma-ray scans be conducted on adjacent properties along Latham and Dr. .on Streets. These scans would be conducted by survey personnel walking on the property. The ground would be scanned with an NaI(Tl) scintillation survey meter at the surface; building foundation walls would also be scanned. If any anomalies were found during this scan, a full radiological survey of the property would be conducted. A scanning survey of a property would be done only with the property owner's consent.

### Task 5. Radiological Survey Reporting

The radiological survey findings for each property will be reported in two separate reports. One report will contain all field measurement data obtained at each property. These preliminary letter reports will be submitted to DOE within five days following the completion of the

000586

survey. Conclusions in these letter reports will relate the radiation exposures found on each site to established guidelines for members of the public. Sources of radiation exposures will be identified and the quantity of radioactive material involved will be estimated. An evaluation of radiation exposure will be prepared for each property. The second letter report for each property will contain all analytical results for environmental samples taken during the survey. These analytical results will be related to on-site measurements. Comments received on the preliminary report will be incorporated in preparation of the second report. Any properties for which access was denied will be identified as will any property which had no anomalies on the surface gamma-ray scan. These identifications will be made in the cover letter transmitting the first series of reports.

#### Schedule

##### Task 1 and Task 2.

These tasks will be completed during the week ending May 20, 1981.

##### Task 3 and Task 4.

These tasks will be performed concurrently. Task 3 is scheduled to be June 3, 1981.

##### Task 5.

Preliminary reports will be transmitted during the week of June 19, 1981. Target date for transmittal is June 15, 1981. Draft final letter reports will be transmitted approximately six weeks following the preliminary report transmittal.

7  
8  
5  
0  
0

RADIOLOGICAL SURVEY PLAN FOR PRIVATE PROPERTIES  
IN MAYWOOD, NEW JERSEY

INTRODUCTION

The Stepan Chemical Company (formerly Maywood Chemical Company) was developed in 1895. From about 1916 until 1957 the Maywood Chemical Company processed thorium for use in the manufacture of gas mantles for various lighting devices.<sup>1</sup> In 1932, Route 17 was built to the west of the main plant through an area that was used for disposal of process wastes. Although access to the site was probably restricted, the waste disposal area had no access restrictions. In 1959, Maywood Chemical Company was purchased by the Stepan Chemical Company. A federally supervised cleanup of a portion of the waste dump was conducted in 1960. Presently, Stepan Chemical Company owns a 30-acre site east of N.J. Route 17, just south of the New York, Susquehanna and Western Railroad right of way. On the west side of N.J. Route 17, SWS Industries owns a vacant 8.7-acre site (formerly a portion of the waste disposal area); plans have been made to locate a warehouse/office complex on this site.

During an aerial survey of the Stepan Chemical Company and the surrounding area in Maywood, New Jersey, by EG&G<sup>1</sup> on January 26, 1981, anomalously high gamma-ray exposure rates (principally <sup>232</sup>Th daughter radionuclides) were observed in a residential area close to the Stepan Chemical site. Seven private homes in Maywood, New Jersey, were later identified in a follow-up ground survey by the Nuclear Regulatory Commission<sup>2</sup> as having external gamma radiation levels significantly above background. Exposure rates up to 3 mR/h have been observed on these properties. It is surmized that thorium residues were obtained from the Maywood Chemical Waste disposal area and used as fill material on these private properties.

At the request of the Environmental and Safety Engineering Division (ESED) of the Department of Energy, the Off-Site Pollutant Measurements Group, at Oak Ridge National Laboratory (ORNL) will perform a comprehensive radiological survey on seven private properties in Maywood, New Jersey. The survey is scheduled to begin June 3, 1981.

000588

## SURVEY METHODS

The following section describes the survey methods to be employed in performing the ORNL radiological survey. Detailed descriptions of instrumentation, measurement procedures and sample analyses are presented in an ORNL/TM report.<sup>3</sup>

### Outdoor Survey

#### Grid system

Prior to radiological measurements, a rectangular grid will be established covering the entire area to be surveyed. The spacing of mutually perpendicular grid lines will be determined by the size of the area involved and by the level of detail required for any given area. At least 30 grid points (intersection of grid lines) will be established for each property. At some locations where significant levels of contamination are observed, a smaller grid system will be superimposed to provide more detailed information as required. The size of the smaller grid system will be determined in the field as conditions dictate.

#### External gamma radiation measurements

External gamma radiation levels will be measured using a 3.2 cm x 3.8 cm NaI(Tl) probe attached to a ratemeter (calibration for this instrument is performed in the field using a Reuter-Stokes Pressurized Ion Chamber [PIC]). External gamma-ray exposure rates are measured at the ground surface and 1 m above the ground surface at grid points; these measurements will be recorded. Each grid block (square formed by the grid lines) will be scanned at the surface, and the maximum gamma radiation level within each block will be noted.

#### Beta-gamma dose rates

Beta-gamma dose rate measurements at 1 cm above the ground surface will be performed at those locations where surface gamma radiation levels are significantly above background. The instrument used for

6  
8  
5  
0  
0  
0

these measurements is a Geiger-Mueller (G-M) survey meter with a window thickness of 7 mg/cm<sup>2</sup> and a halogen-quenched GM tube (open and closed window).

#### Surface deposits of radioactive materials

Samples of surface soil (a 10 cm × 10 cm area soil sample to a 15-cm depth) will be collected at systematic locations and analyzed in order to identify the locations and estimated quantities of surface deposits of radioactivity. In addition, biased surface soil samples will be obtained at representative locations where elevated external gamma radiation levels are observed. Soil samples will be packaged and transported back to ORNL for processing and analyses for concentrations of <sup>238</sup>U, <sup>226</sup>Ra, <sup>232</sup>Th and other radionuclides as appropriate.

#### Subsurface deposits of radioactive materials

Drillings and/or corings will be made at selected locations throughout any area suspected of having subsurface deposits of contaminated materials. The purpose of drilling and/or coring is to locate and estimate the quantities of subsurface deposits of radioactivity. If subsurface radioactivity is suspected within an area and no surface contamination is evident, a random search technique of drilling and gamma-ray logging within that area will be used to locate and identify the boundaries of any subsurface contamination. Drill holes will be augered to an approximate 15-cm diameter and to a depth where a naturally occurring soil strata is encountered. A plastic pipe with a 10-cm (4-inch) inside diameter will be placed in each hole, and an NaI(Tl) gamma-ray scintillation probe will be lowered inside the pipe. The probe is encased in a lead shield with a narrow collimating slot on the side. This arrangement provides measurement of gamma radiation intensities resulting from contamination within small fractions of the hole depth. Measurements are usually made at 15-cm or 30-cm intervals. This "logging" of the core holes is done in order to define the profile of radioactivity underground and as a first step in determining the extent of subsurface contamination at each location. Samples of

0659000

subsurface soil from core holes will be collected at random locations and returned to ORNL for analysis for  $^{226}\text{Ra}$ ,  $^{238}\text{U}$ ,  $^{232}\text{Th}$  and other radionuclides deemed appropriate. The number of locations of core holes will be determined in the field based on the results of auger-hole loggings and surface gamma radiation levels. The core holes will be drilled and split-spoon samples will be taken at 15- to 30-cm intervals as required. After sampling, the core holes will be augered to a 15-cm diameter and logged at 15- to 30-cm intervals (as required) using the lead-shielded gamma-ray scintillator.

### Indoor Surveys

#### External gamma radiation measurements

External gamma radiation levels will be measured at a height of 1 m above the floor in the center of each room using an NaI(Tl) scintillation survey meter. The survey meter will be cross-calibrated with the Reuter-Stokes PIC in the most frequently occupied room of the house. The floor and walls of each room will be scanned for gamma radiation at the surface and the maximum gamma radiation level associated with each surface will be noted.

#### Beta-gamma dose rates

Beta-gamma dose rates will be measured at those locations where external gamma-ray exposure rates were found to be significantly above background. These measurements will consist of open- and closed-window Geiger-Mueller (G-M) survey meter readings.

#### Surface alpha radiation levels

Surface alpha radiation levels will be measured at the center of the room as well as several other locations as determined in the field. A ZnS(Ag) detector (covered by a 0.03-mil aluminized mylar sheet) will be used and have an attached photomultiplier tube with a portable scaler/ratemeter.

Removable alpha and beta-gamma activity from surfaces

Removable or transferable surface contamination levels will be measured by taking standard smears. The smears are lightly rubbed over a 100-cm<sup>2</sup> area and counted for removable long-lived alpha and beta-gamma activity. A smear sample will be obtained near the center of the room where a hard surface is accessible. Smear samples will also be taken at locations where elevated gamma, beta-gamma, and/or alpha radiation levels are observed.

Radon and radon progeny measurements

Concentration of radon (<sup>222</sup>Rn) will be measured indoors at the houses if evidence of indoor contamination is found. Individual radon (radon [<sup>222</sup>Rn], thoron [<sup>220</sup>Rn], actinon [<sup>219</sup>Rn]) progeny concentrations in air will be measured at various locations and times within all houses.

Other samples

During the gamma-ray scanning of the property, building materials such as wood, concrete, or bricks may be found to have elevated gamma radiation levels associated with them. These materials as well as atypical samples from the outdoor survey (e.g., large rocks, vegetation, etc.) will be obtained and returned to ORNL for analyses. The resulting laboratory analysis is sample-specific, dependent on the pattern of contamination (i.e., radionuclide concentration versus measurement of surface contamination).

08 15 34

REFERENCES

1. EG&G, An Aerial Radiological Survey of the Stepan Chemical Company and Surrounding Area, Maywood, New Jersey, EG&G Survey Report NRC-8109 (April 1981).
2. Nuclear Regulatory Commission, memorandum from M. Campbell to J. D. Kinnerman, re: Records of Surveys of Private Homes in Maywood, New Jersey, Docket No. 40-8610, May 15, 1981.
3. B. A. Berven, T. E. Myrick, R. W. Leggett, W. A. Goldsmith, and F. F. Haywood, Generic Radiological Survey and Post Remedial Action Survey Plan for Private and Public Properties Associated with the Department of Energy's Remedial Action Program, ORNL/TM-7850 (in draft).

3  
6  
5  
9  
3  
0  
0  
0  
0

08-1534

43

APPENDIX II -

GAMMA PROFILE GRAPHS OF CORE HOLES AT  
464 DAVISON AVENUE IN MAYWOOD, NEW JERSEY

000594

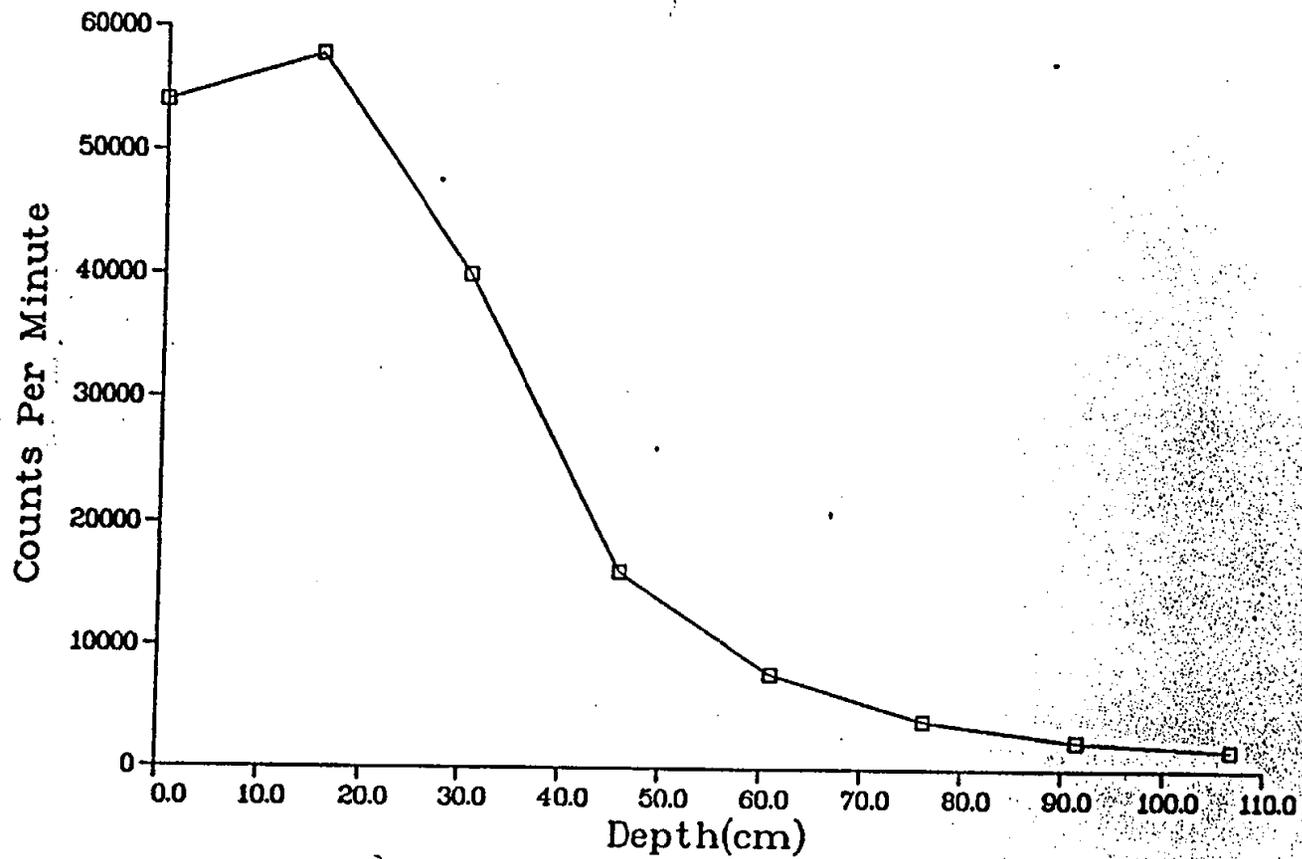


Fig. II-1. Gamma profile of core hole MJC19 (see Fig. 6)

44

081537

0 0 0 5 9 5

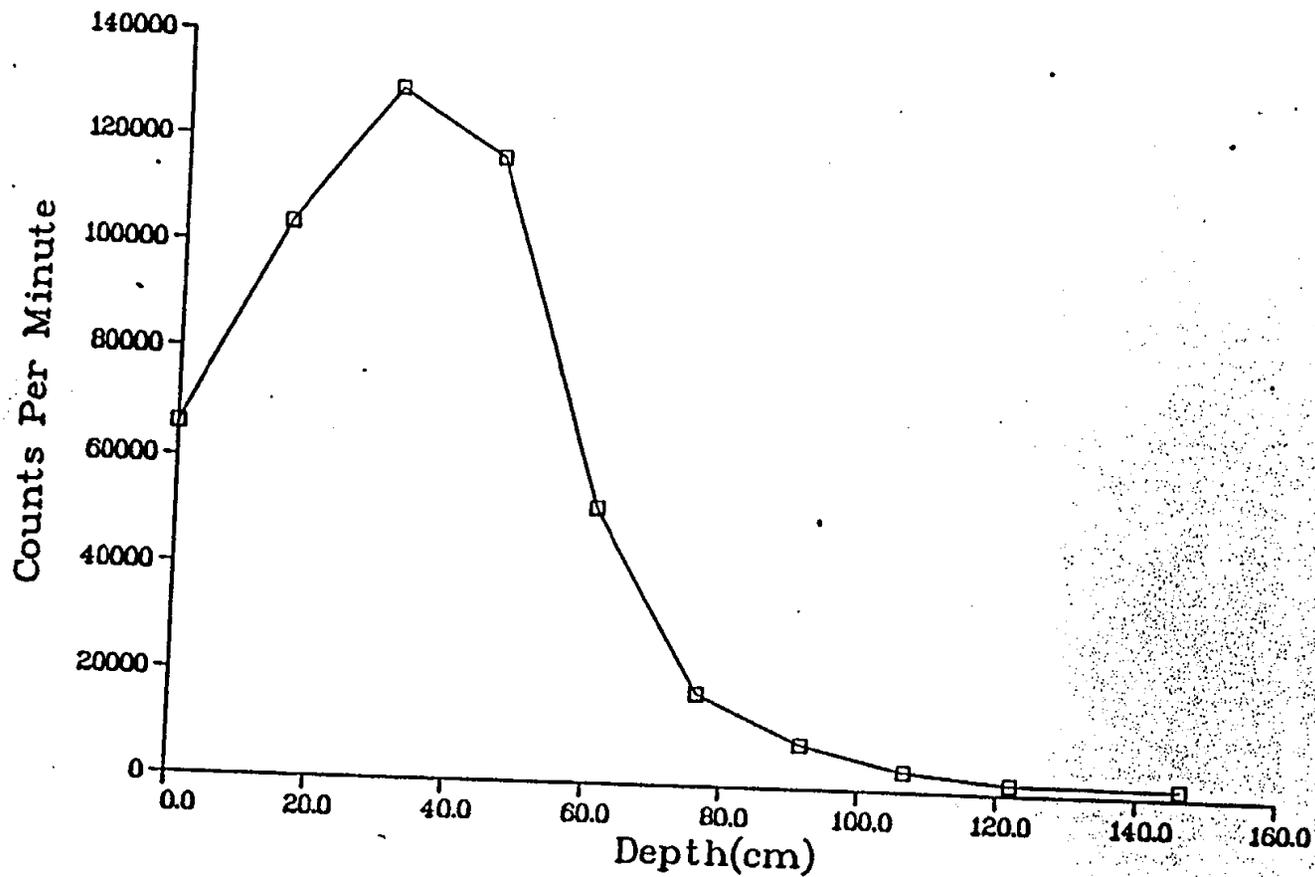


Fig. II-2. Gamma profile of core hole MJC20 (see Fig. 6)

45  
081534

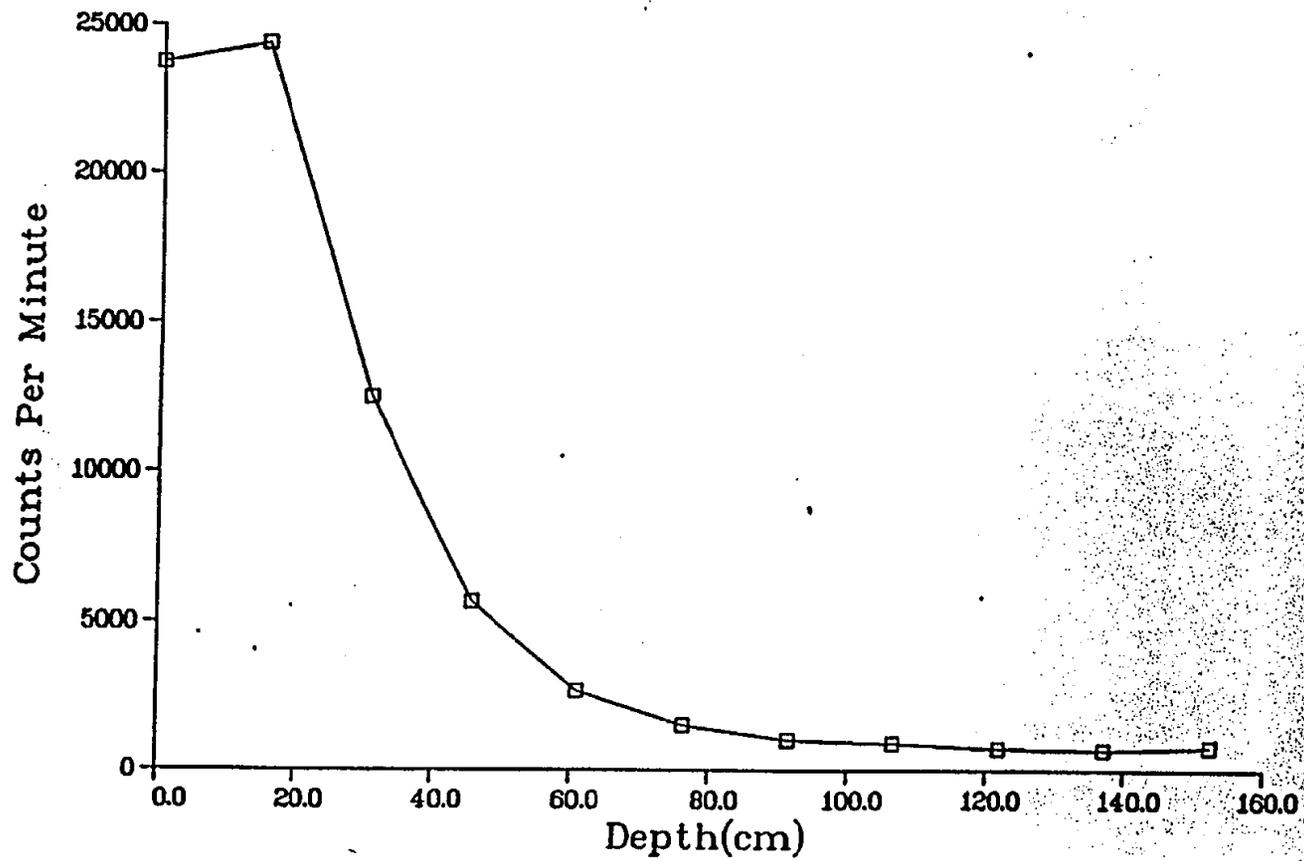


Fig. II-3. Gamma profile of core hole MJC21 (see Fig. 6)

46

081534

0 0 0 5 9 7

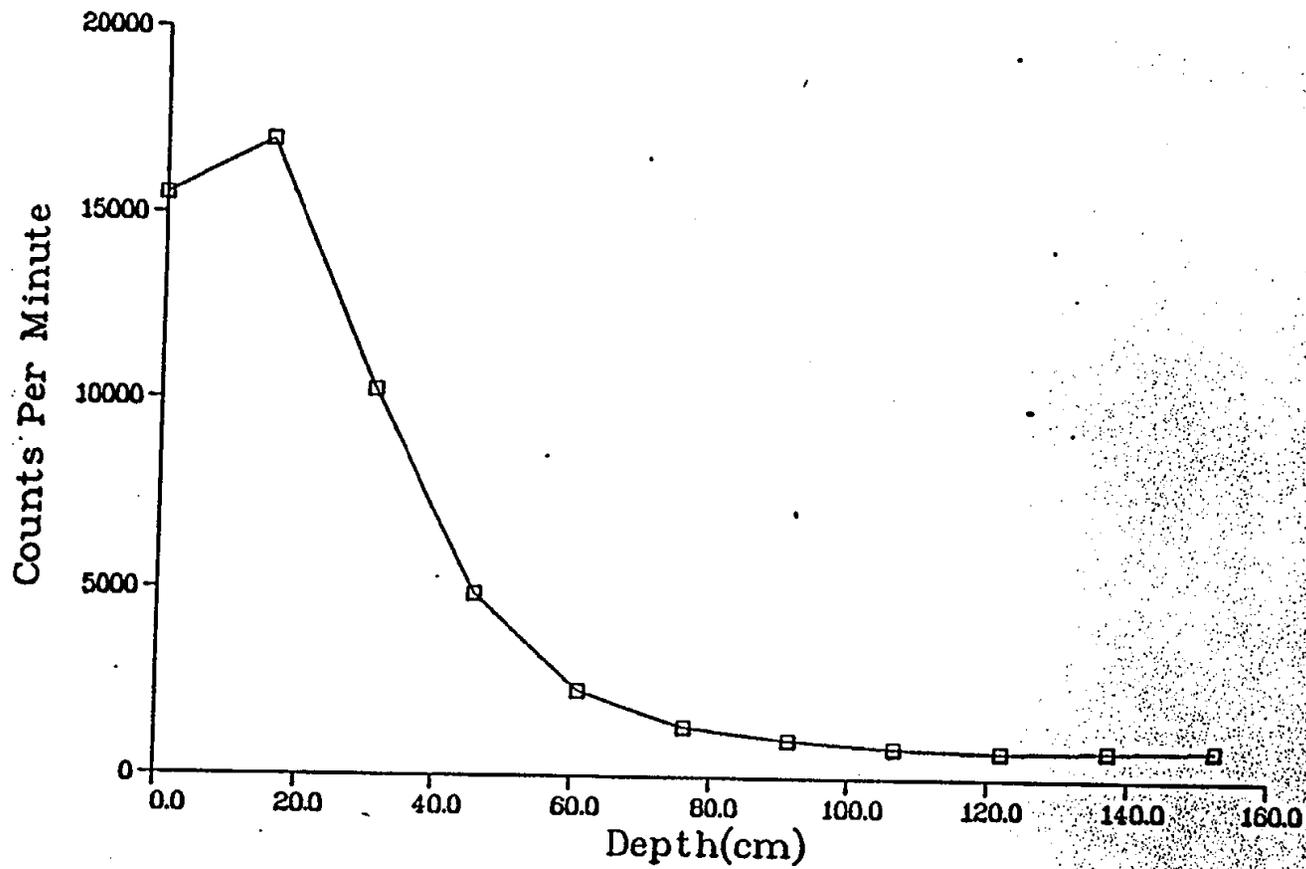


Fig. II-4. Gamma profile of core hole MJC22 (see Fig. 6)

08 1534

000598

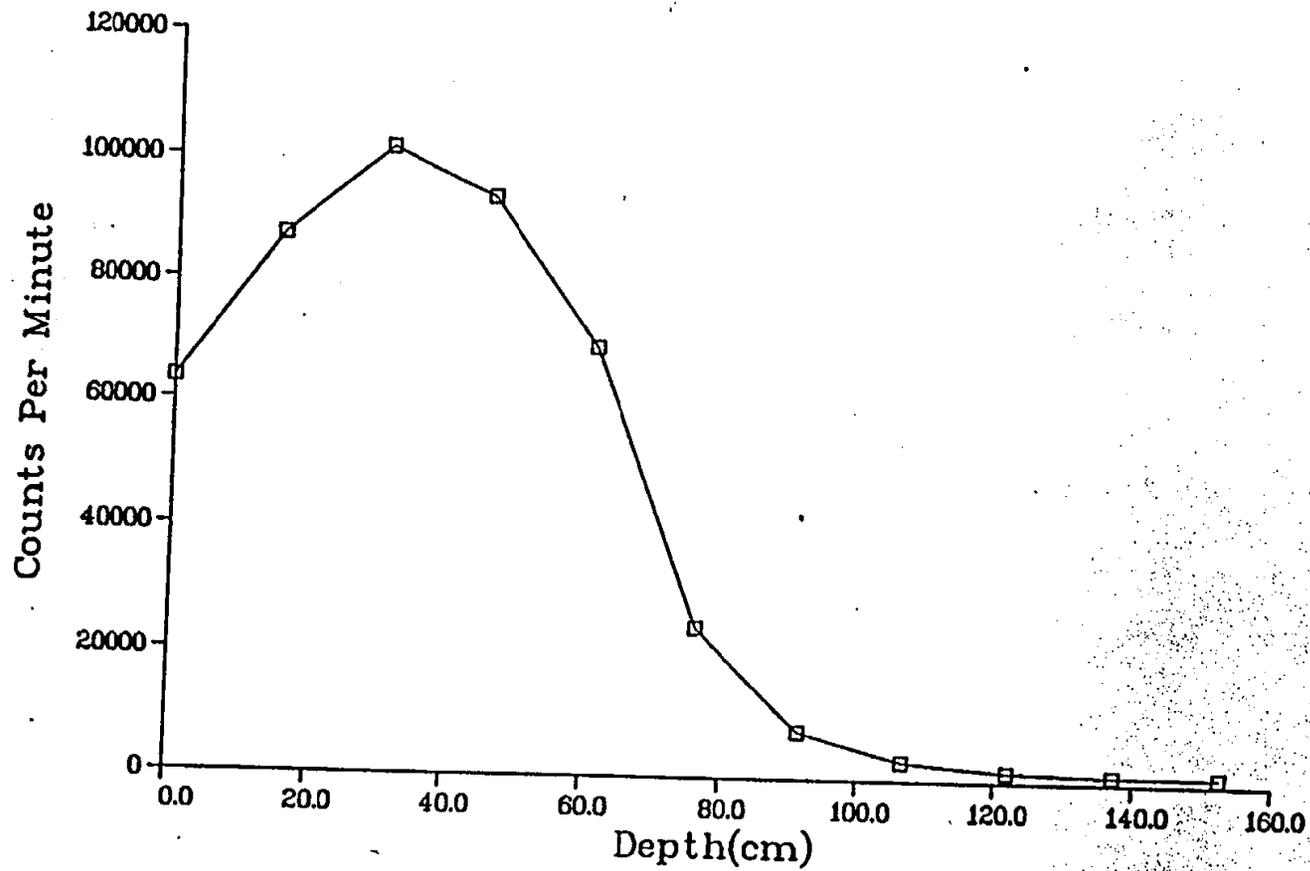


Fig. II-5. Gamma profile of core hole MJC23 (see Fig. 6)

48

081534

0 0 0 5 9 9

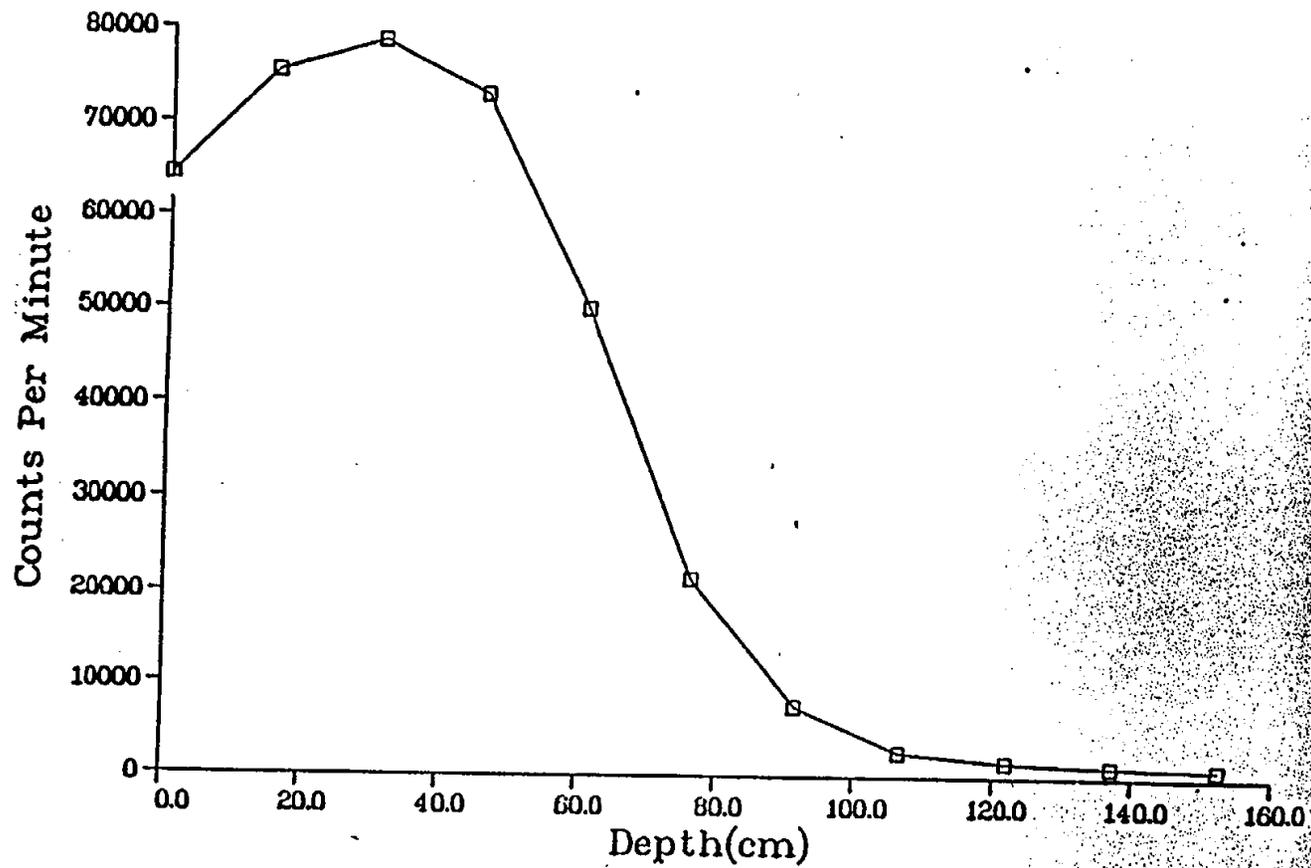


Fig. II-6. Gamma profile of core hole MJC24 (see Fig. 6)

081534

000600

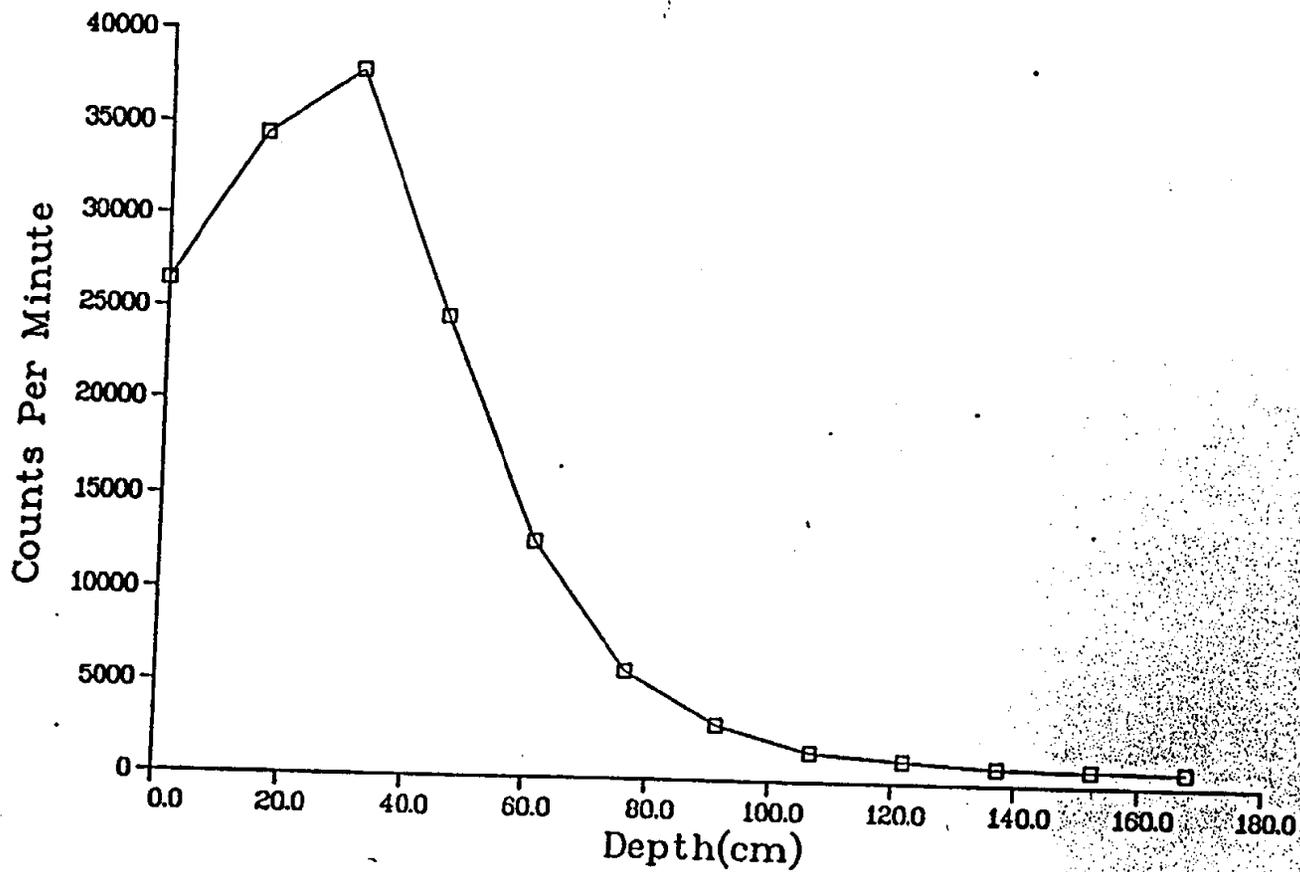


Fig. II-7. Gamma profile of core hole MJC25 (see Fig. 6)

50

081531

000601

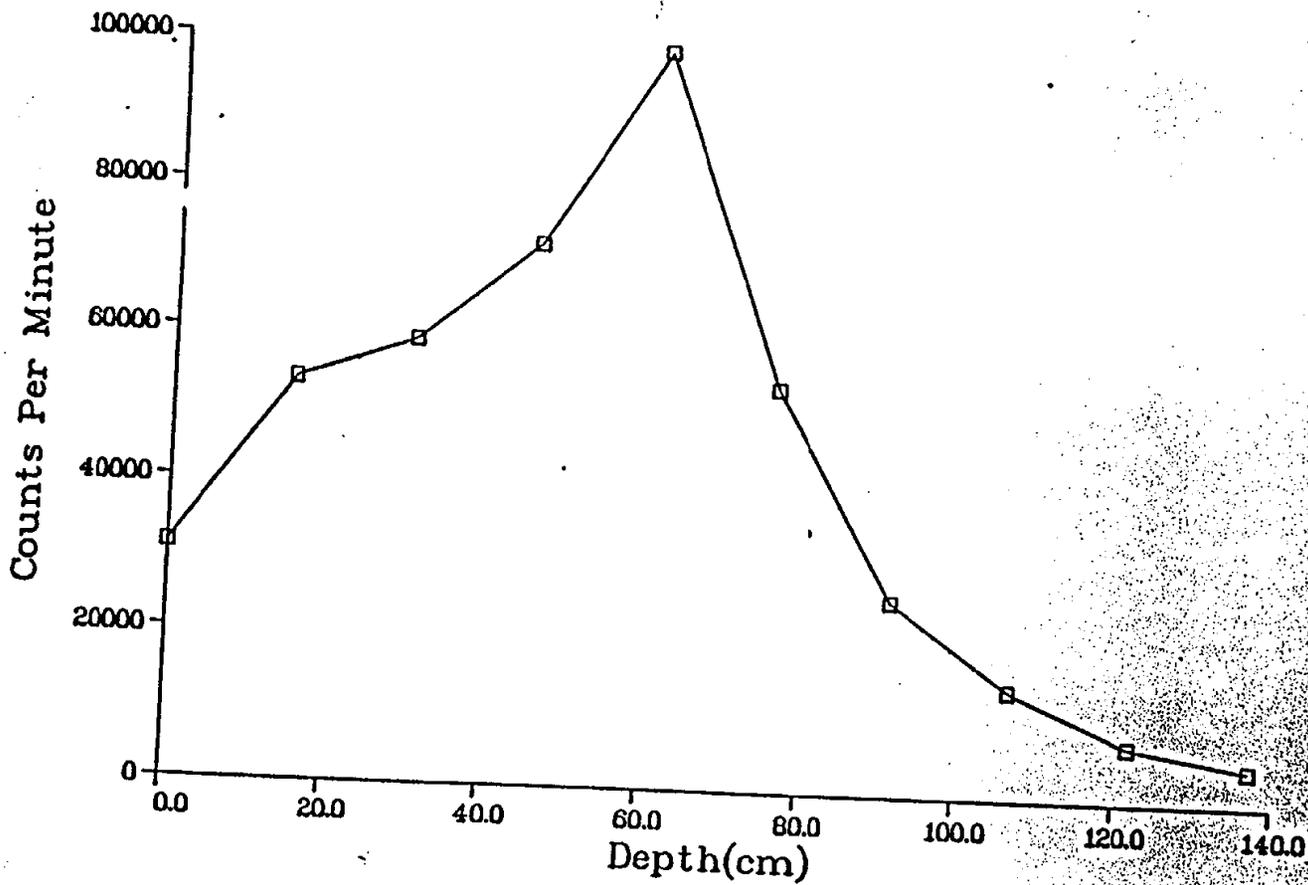


Fig. II-8. Gamma profile of core hole MJC26 (see Fig. 6)

51

081534

0 0 0 '6 0 2

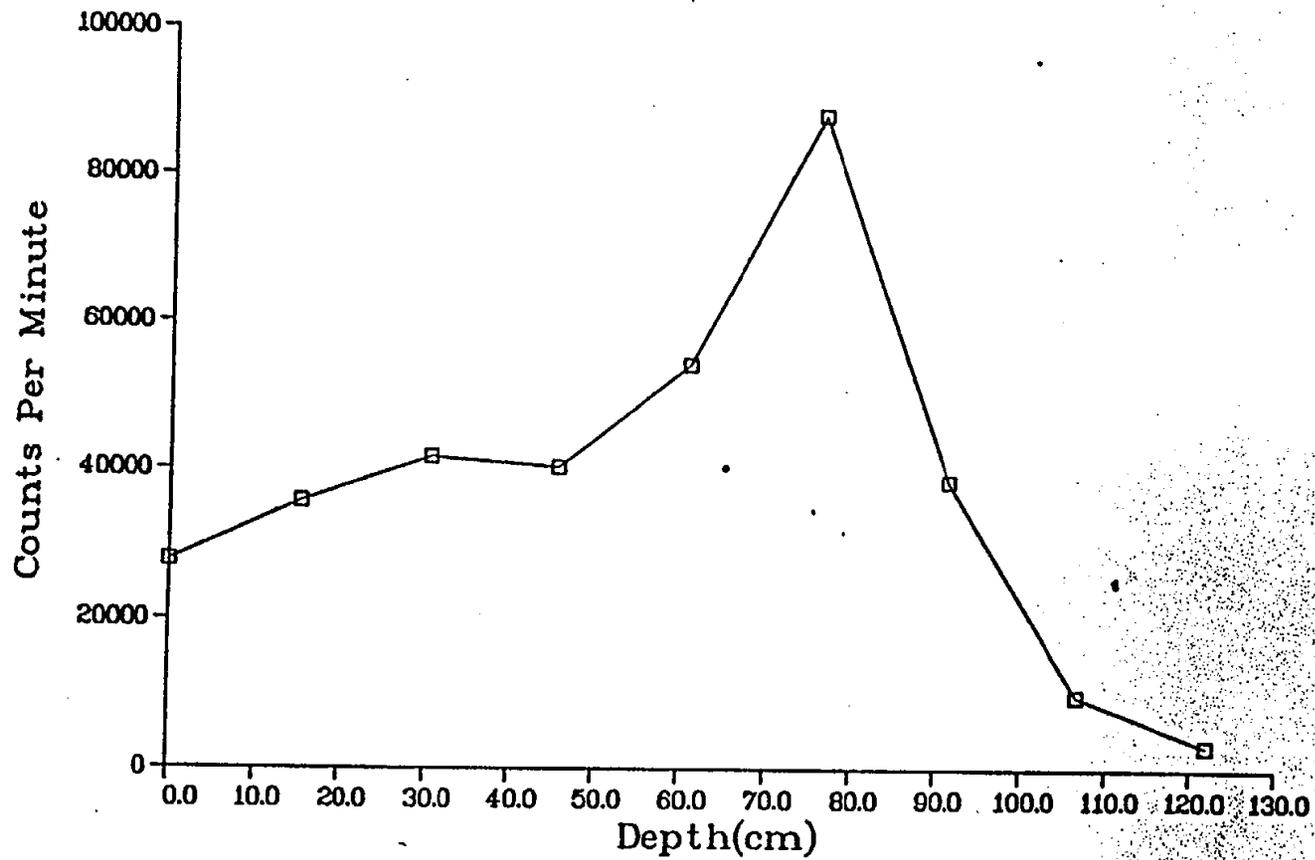


Fig. II-9. Gamma profile of core hole MJC27 (see Fig. 6)

52

081532

0 0 0 6 0 3

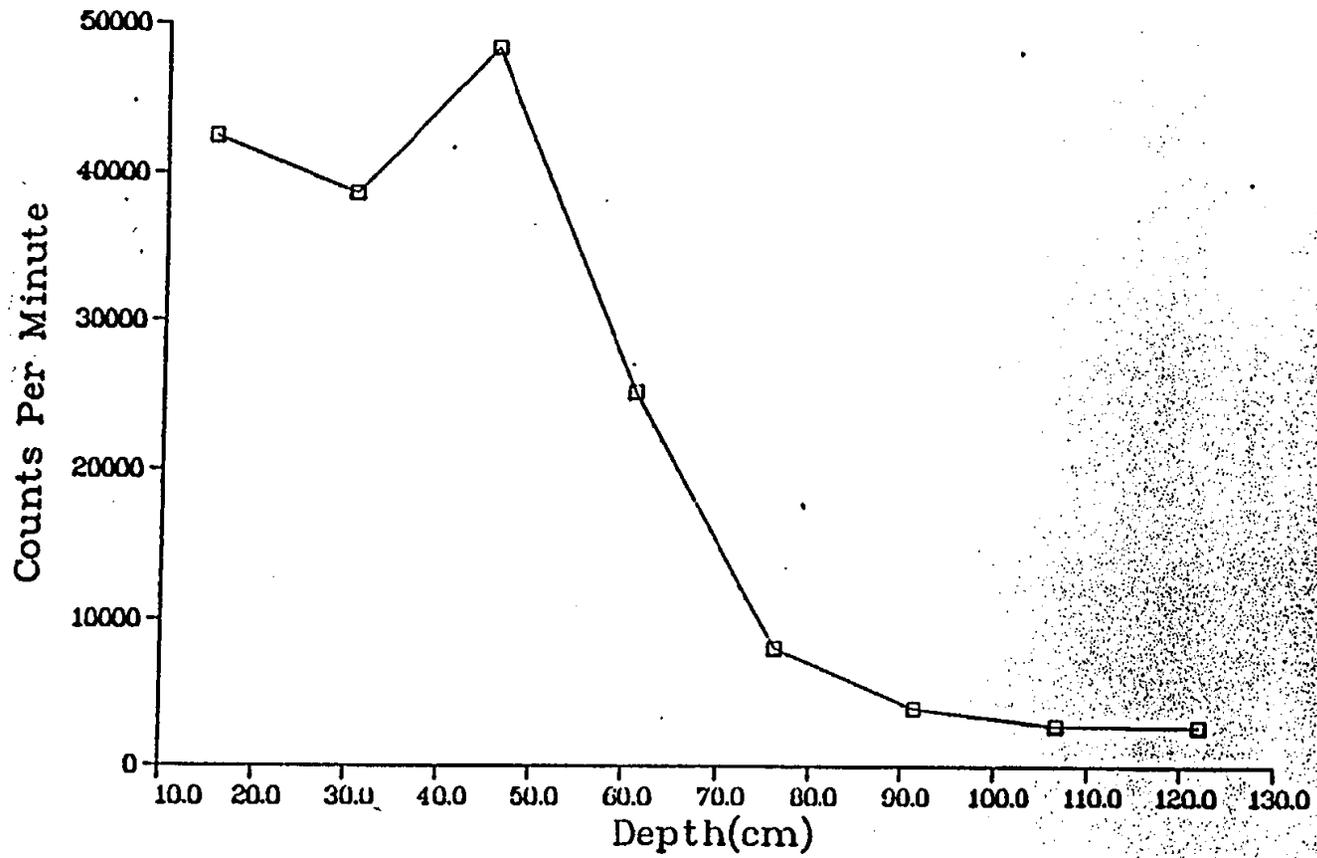


Fig. II-10. Gamma profile of core hole MJC28 (see Fig. 6)

53

08 1534

0 0 0 6 0 4

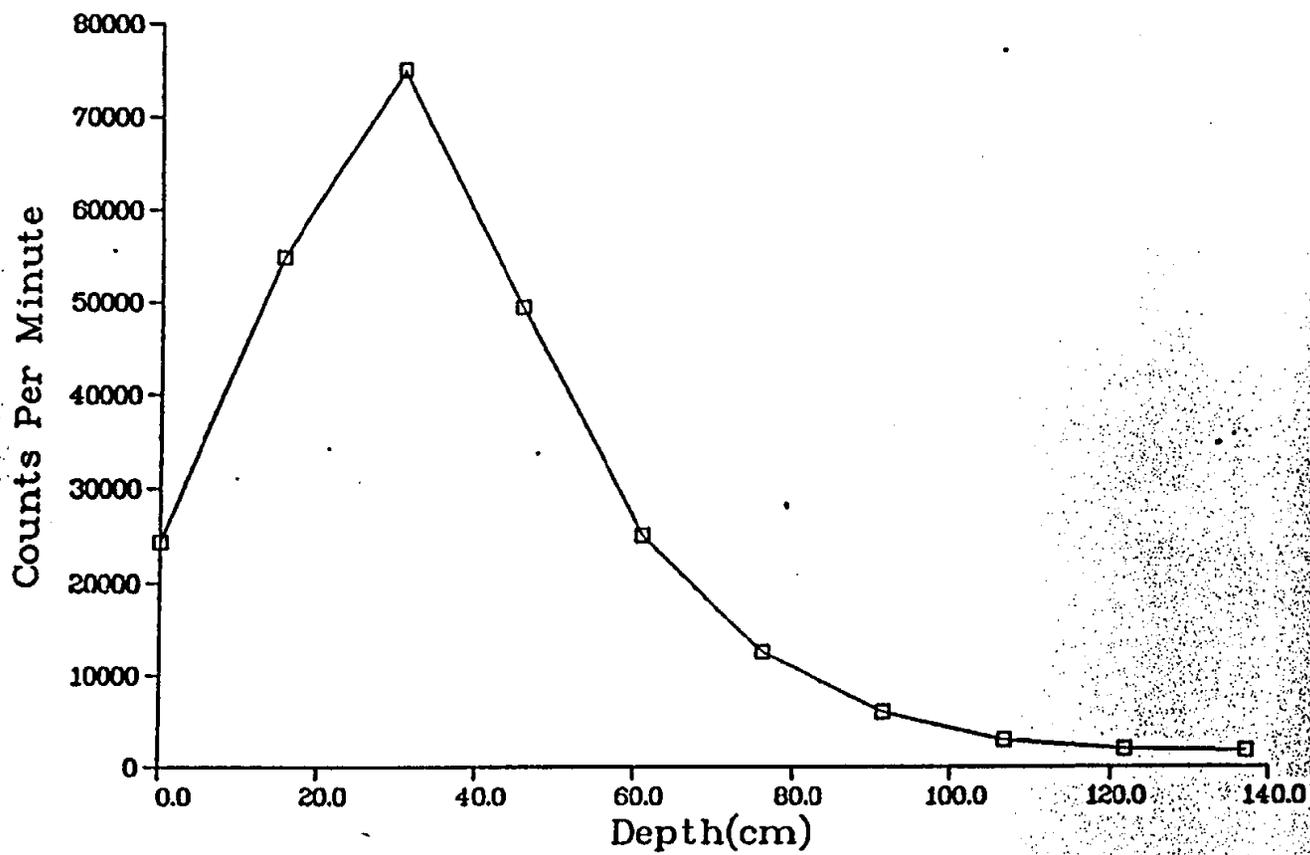


Fig. II-11. Gamma profile of core hole MJC29 (see Fig. 6)

54

091534

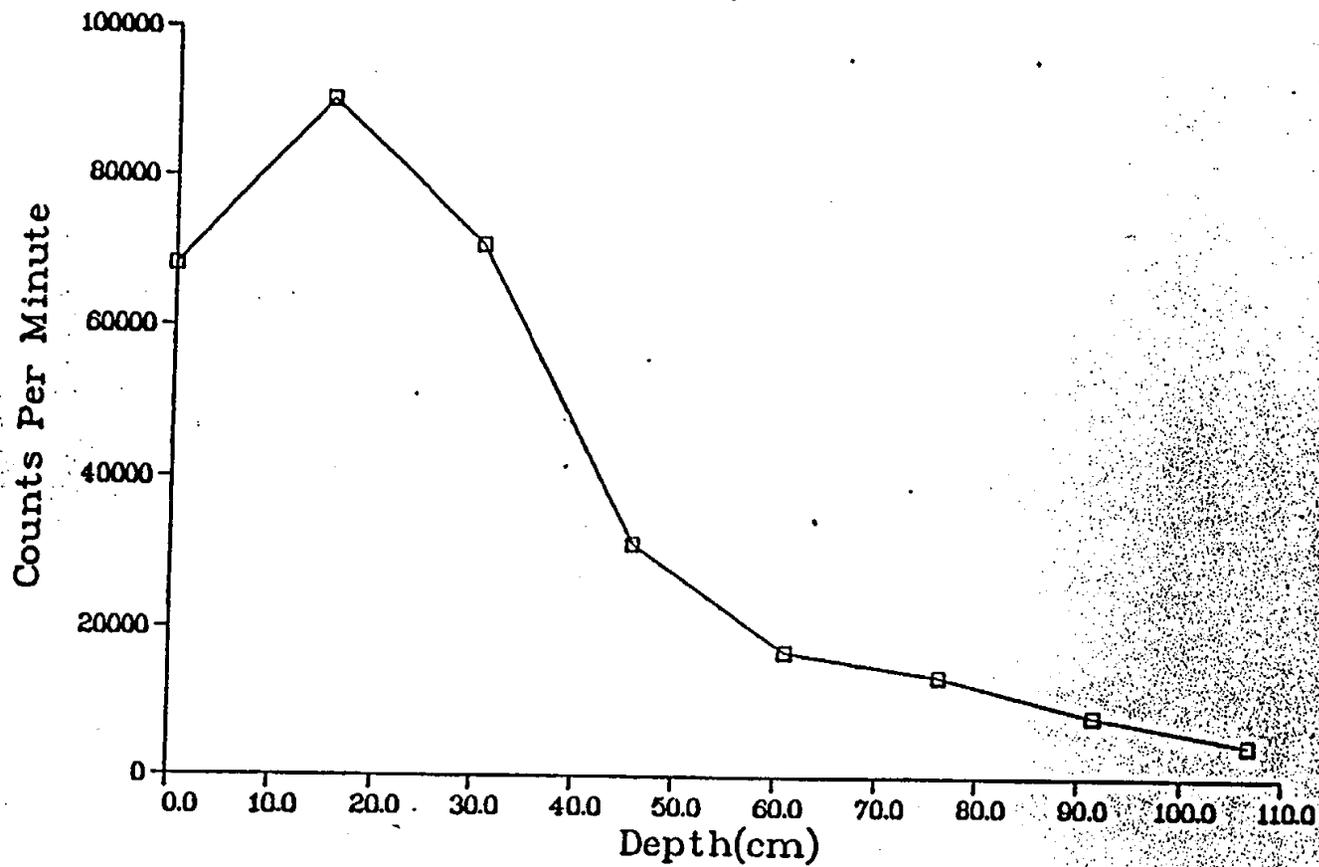


Fig. II-12. Gamma profile of core hole MJC30 (see Fig. 6)

55

08 15 34

0 0 0 6 0 6

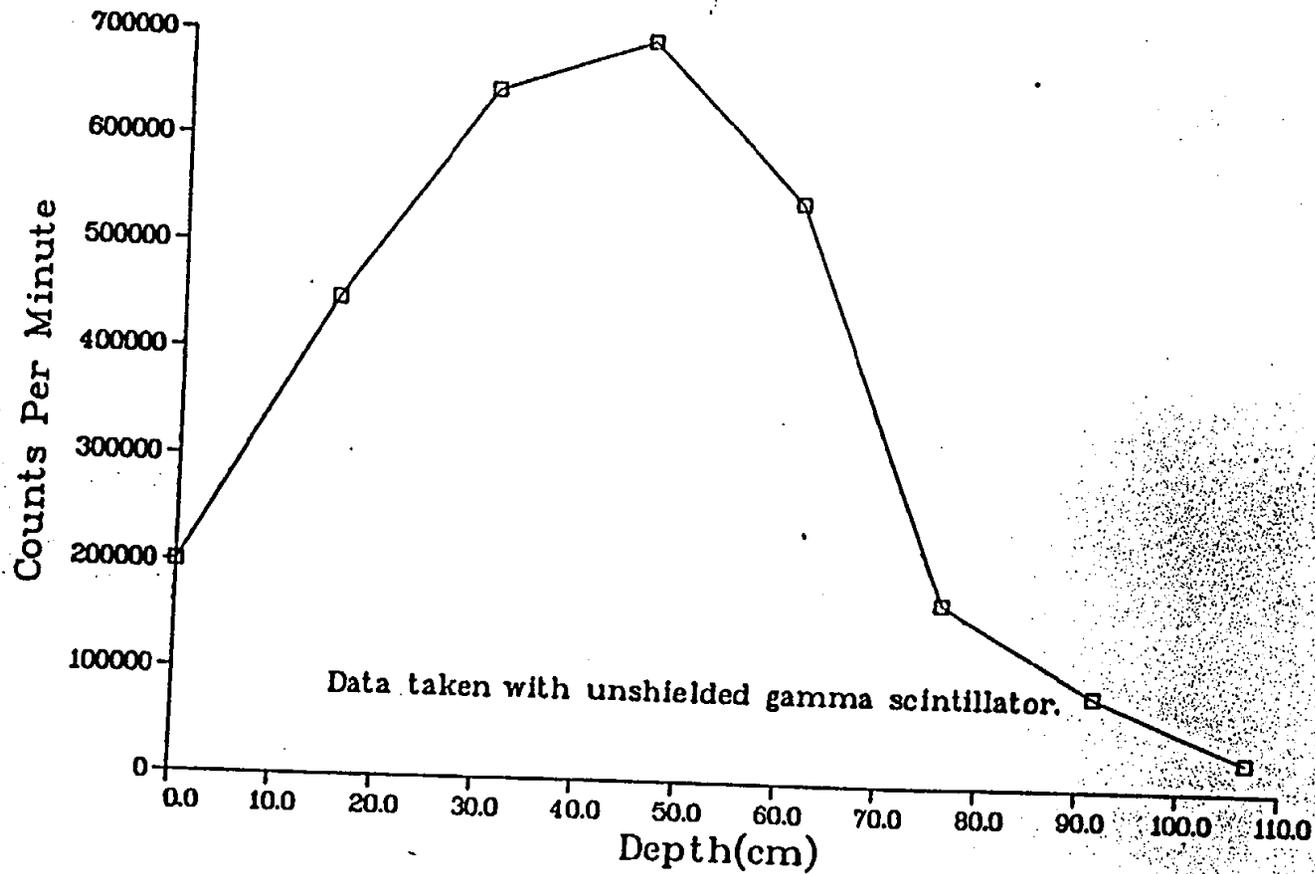


Fig. II-13. Gamma profile of core hole MJC31 (see Fig. 8)

56

081534

000607

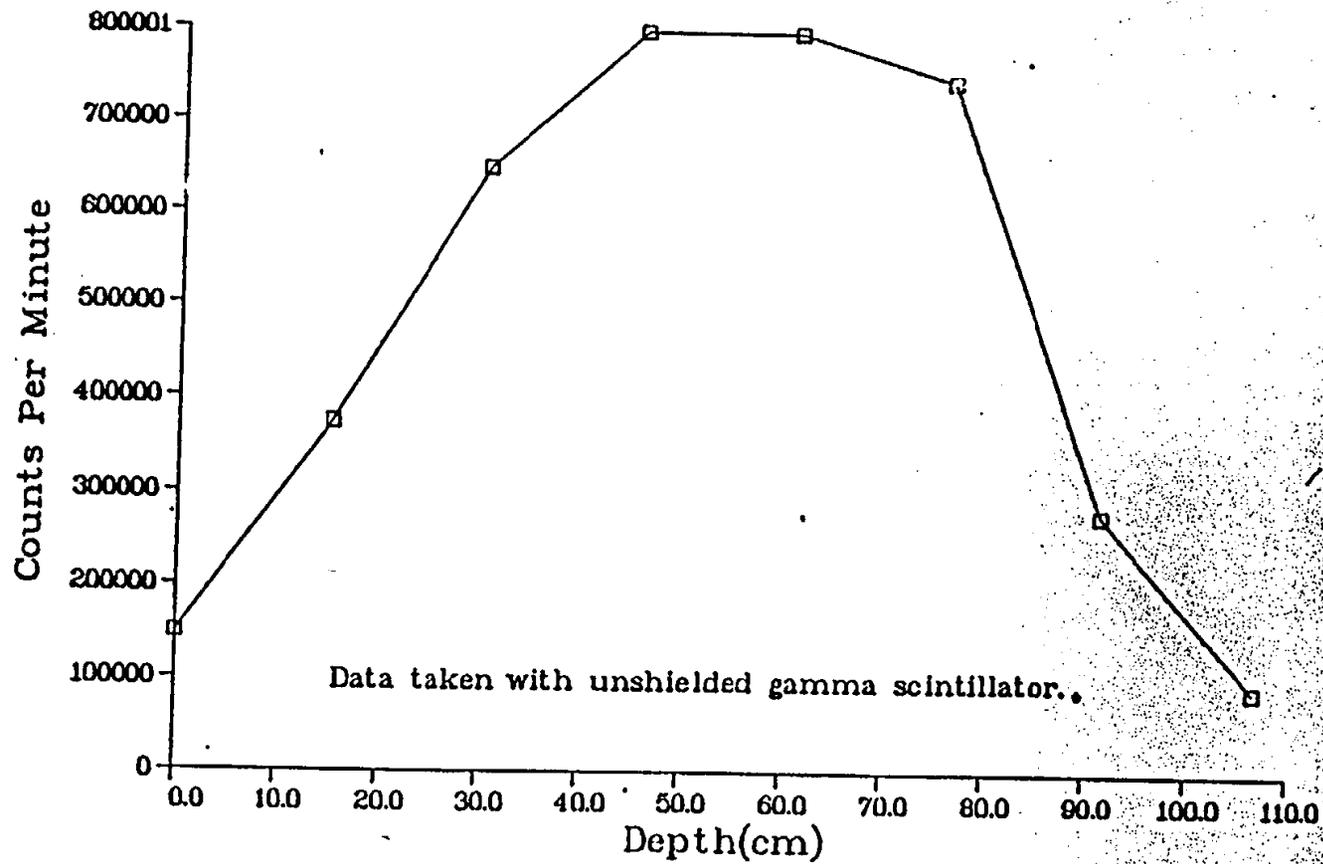


Fig. II-14. Gamma profile of core hole MJC32 (see Fig. 8)

08 1534

57

0 0 0 6 0 8

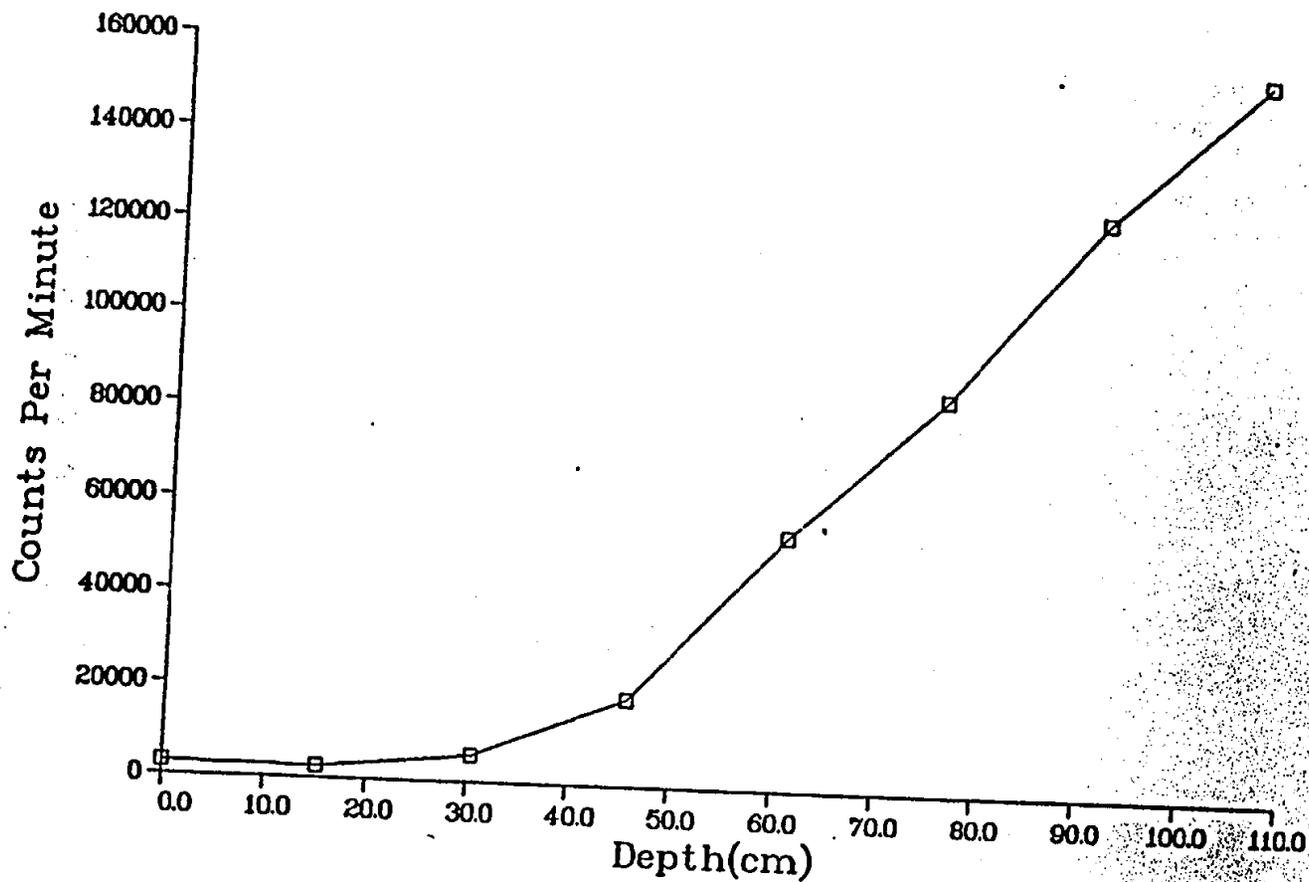


Fig. II-15. Gamma profile of core hole MJC33 (see Fig. 6)

081554

000609

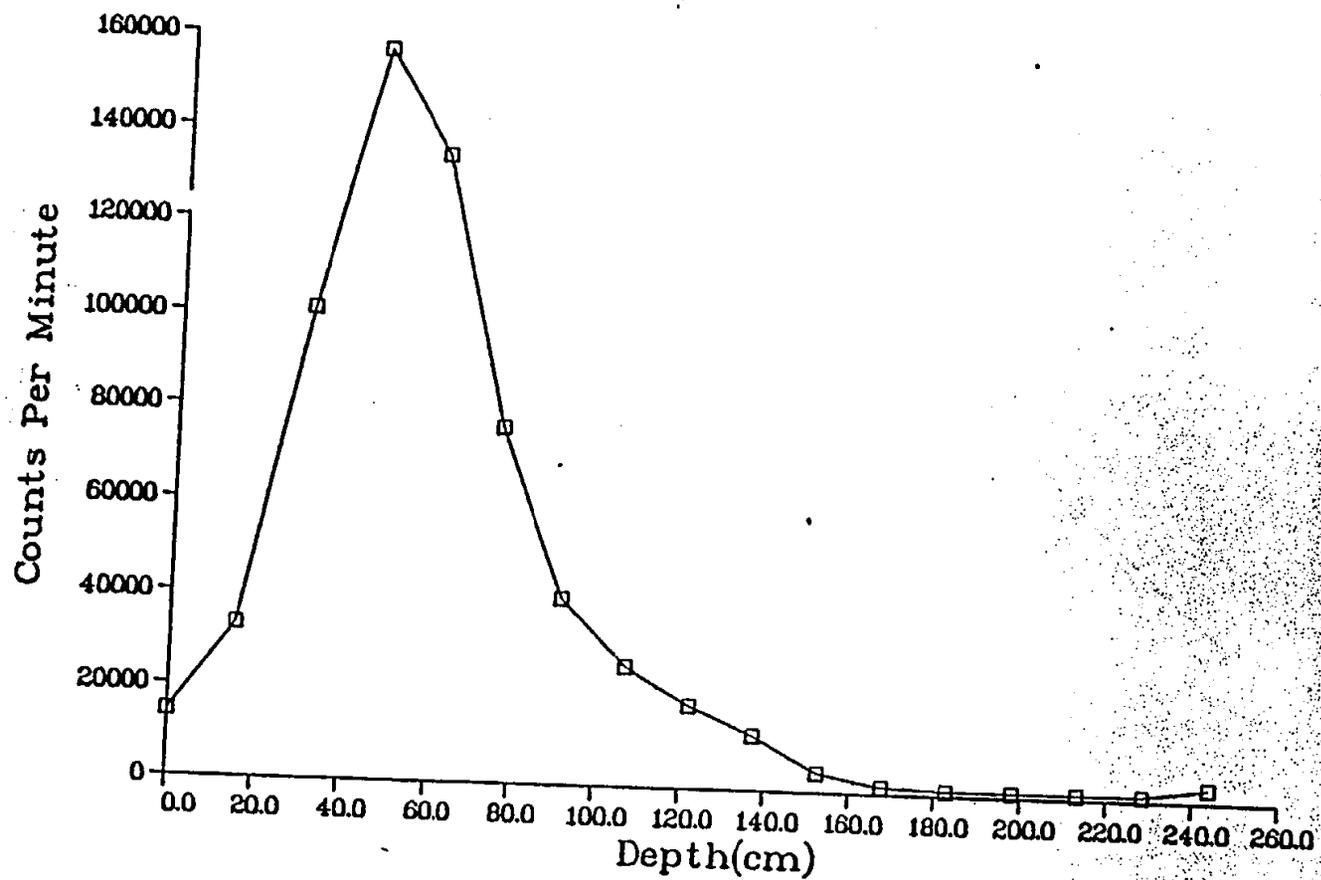


Fig. II-16. Gamma profile of core hole MJC44 (see Fig. 6)

69

081537

000610

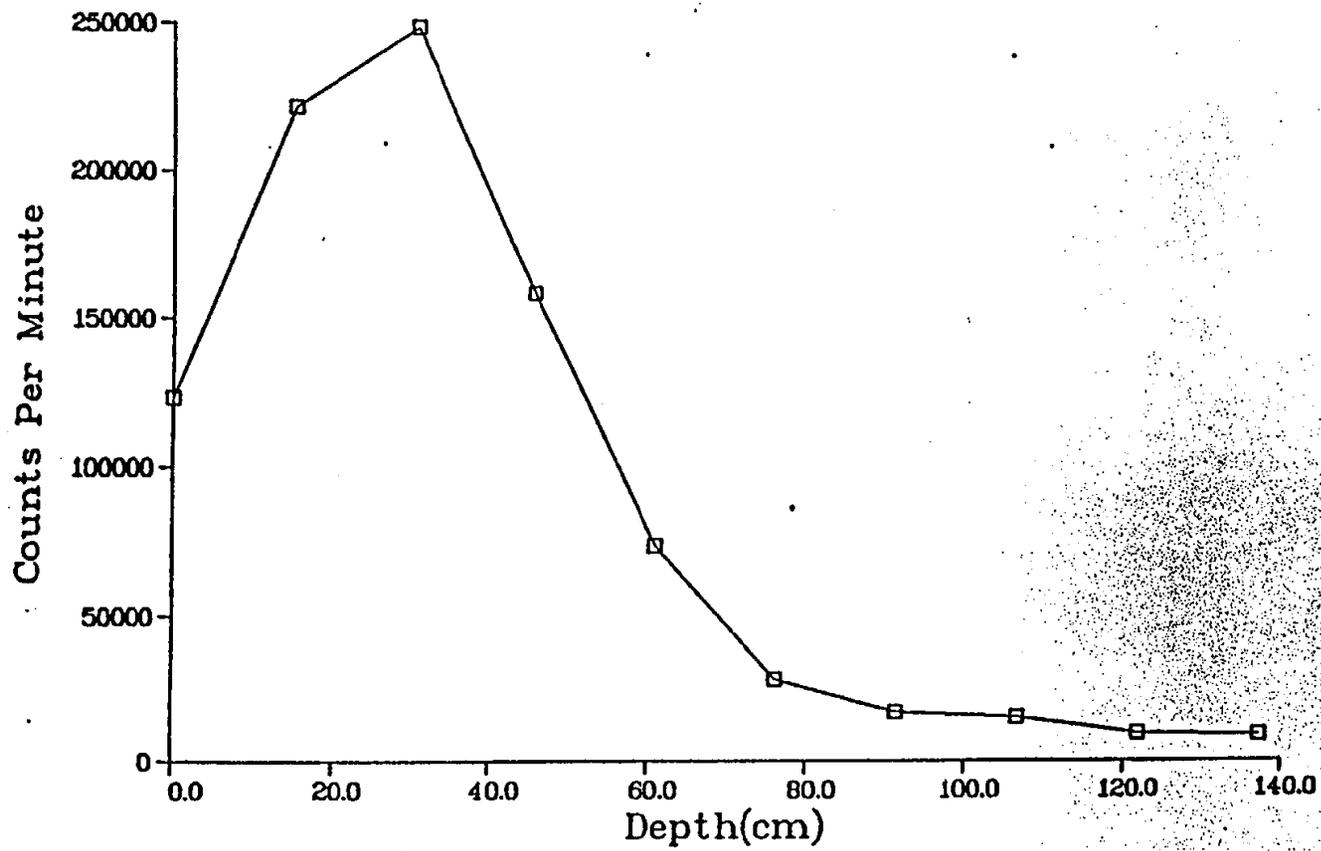


Fig. II-17. Gamma profile of core hole MJC45 (see Fig. 6)

081534

09

0 0 0 6 1 1

61

08:1534

APPENDIX III

EVALUATION OF RADIATION EXPOSURES  
AT 464 DAVISON AVENUE IN  
MAYWOOD, NEW JERSEY

000613

08 1534

62

EVALUATION OF RADIATION EXPOSURES AT 464 DAVISON AVENUE  
IN MAYWOOD, NEW JERSEY

INTRODUCTION

Contaminated material was first discovered at this property and several nearby properties during an EG&G aerial radiological survey and subsequent ground-level Nuclear Regulatory Commission radiological survey. Because the contaminated material was similar to waste material that was generated by the Maywood Chemical Company (now Stepan Chemical Company), the material is believed to have originated from that source.

John Tripuka, owner of 461 Latham Street, confirmed that from 1944-1946, material from the former Maywood Chemical Company was transported to 464 Davison (then a vacant lot) by his father and was used for fill and mulching material at both properties. Other neighbors also had access to this material for use in their yards.

In June 1981, on request of the Department of Energy (DOE), Oak Ridge National Laboratory (ORNL) performed a radiological survey of this property. It was determined that all of the exterior property was contaminated with radioactive material of the naturally occurring thorium and uranium decay chains and that this material was present under the foundation and floor in the basement of the house. The contamination is located approximately the upper 3.0 feet (1.0 meter) of soil. No residual radioactive materials were found inside the house.

BACKGROUND RADIATION EXPOSURES

The naturally occurring radionuclides present at this property are present normally in minute quantities throughout our environment. Concentrations of these radionuclides in normal soils, air, water, food, etc., are referred to as background concentrations. Radiation exposures resulting from this environmental radioactivity are referred to as background exposures. These background exposures are not caused by any human activity and, to a large extent, can be controlled only through man's moving to areas with lower background exposures. Each and every human receives some background exposure daily.

000614

The use of radioactive materials for scientific, industrial, or medical purposes may cause radiation exposures above the background level to be received by workers in the industry and, to a lesser extent, by members of the general public. Scientifically based guidelines have been developed to place an upper limit on these additional exposures. Limits established for exposures to the general public are much lower than limits established for workers in the nuclear industry.

As described previously, the contaminated materials present on this property consisted of radionuclides of the thorium and the uranium decay chains. Uranium-238 and thorium-232 were created when the earth was formed, and are still present today because they take a very long time to undergo radioactive decay. The half-life is a measure of the time required for radioactive decay; for uranium-238 it is 4.5 billion years. Thus, if 4.5 billion years ago you had a curie\* of uranium-238, today you would have one-half curie; 4.5 billion years hence, this would only be one-fourth curie. As the uranium-238 decays, it changes into another substance, thorium-234. Thorium-234 is called the "daughter" of uranium-238. In turn, thorium-234 is the "parent" of protactinium-234. Radioactive decay started by uranium-238 continues as shown in Table III-1 until stable lead is formed. The "decay product" listed in Table III-1 is the radiation produced as the parent decays. Radioactive decay started by thorium-232 continues as shown in Table III-2 until stable lead is also formed.

#### RADIATION EXPOSURES AT 464 DAVISON AVENUE

There are four primary pathways to humans from the type of contaminated material found on this property. These potential pathways are: (1) direct gamma-ray exposures, (2) inhalation of radon and radon daughters from radon decay, (3) inhalation of airborne radioactive particles, and (4) ingestion of radioactively contaminated foods or water.

---

\*The curie is a unit used to measure the amount of radioactivity in a substance; one curie represents 37 billion radioactive disintegrations per second.

In the following sections, the magnitude of each of these pathways at 464 Davison Avenue is described, based on the radiological conditions determined from the recent radiation survey. A summary of this radiation exposure data is given in Table III-3 along with a listing of the normal background levels for this area and the applicable guideline values for comparison.

#### Direct Gamma-Ray Exposures

As shown in Tables III-1 and III-2, several of the daughters of uranium-238 and of thorium-232 emit gamma radiation (gamma-rays are penetrating radiation like X-rays). Hence, the contamination present on this property is a source of external gamma radiation exposure to persons who reside near or come in contact with this material. Measurements of the gamma radiation levels outdoors on the property determined that the exposure rate at 1 m above the ground ranged from 18 to 390 microroentgens\* per hour, with an average of 140 microroentgens per hour. Inside the house, the exposure rates ranged from 61 to 130 microroentgens per hour, with an average value of 86 microroentgens per hour. For comparison, the normal background gamma-ray exposure rate for the Maywood area is 8 microroentgens per hour.

The NRC guidelines (found in the Code of Federal Regulations, Title 10 Part 20<sup>†</sup>) require that the continuous gamma radiation exposure to any individual in the general population not exceed 500 milliroentgens per year. For persons residing at this property, continuous exposure, (24 hours a day, 365 days per year) to the average levels found outdoors would result in an annual gamma-ray exposure of 1230 milliroentgens, a value well above the guideline limit. Indoors, the continuous annual exposure from the average radiation levels would be 750 milliroentgens. Again, this exposure is above the applicable guideline. For comparison

---

\*The roentgen is a unit which was defined for radiation protection purposes for people exposed to penetrating gamma radiation. A micro-roentgen is one-millionth of a roentgen. A milliroentgen is one-thousandth of a roentgen, or one thousand microroentgens.

<sup>†</sup>Title 10, Code of Federal Regulations, Part 20, is a regulatory document published by the Nuclear Regulatory Commission and may be found in the Federal Register.

000616

with everyday exposures, these values can be compared to a normal background exposure of 70 milliroentgens per year in New Jersey or a typical chest X-ray exposure of 27 milliroentgens.

#### Inhalation of Radon and Radon Daughters

Radon-222 (the daughter of radium-226) and radon-220 (the daughter of radium-224) are inert gases produced by decay of their respective parent radionuclides. When produced, this gas can migrate through the soil or other materials and eventually be released to the atmosphere. If the gas enters a structure with poor ventilation, accumulation of the gas and its short-lived daughters in room air can occur. Breathing of this short-lived radon daughter results in exposure of the respiratory tract to radiation.

Since contaminated soil containing the radioactive parents of radon-222 and radon-220 was found surrounding and underneath the house on this property, the potential for radon migration into the house was believed to exist. Measurements of the indoor concentrations of radon and its daughters in air were made for comparison with normal background levels, as well as current guidelines. The radon (radon-222 and radon-220) concentration in the basement of the house was determined to be 38 picocuries per liter, a value well above normal background for the Maywood area (0.3 to 1.7 picocuries per liter). Upstairs, the radon concentration was determined to be less than 0.5 picocuries per liter. The NRC guideline value for radon-222 in air is 3 picocuries per liter and for radon-220 is 10 picocuries per liter (10 CFR 20).

The measured average radon daughter concentrations in the house were determined to be 0.28 working level<sup>†</sup> downstairs and 0.002 working level upstairs. The concentrations upstairs are within the normal background range for the New Jersey area (0.004 to 0.008 working level), and are

---

\*One picocurie is one million-millionth of a curie, previously defined.

†The working level is a unit which was defined for radiation protection purposes for uranium miners. It represents a specific level of energy emitted by the short-lived daughters of radon.

0 0 0 ' 6 1 7

well below the guideline values of 0.03 working level suggested in 10 CFR 20 or 0.01 working level given in the Surgeon General's Guidelines.\* However, the concentrations downstairs were found to be well above the guideline values under the ventilation conditions present at the time of measurement.

#### Inhalation of Airborne Radioactive Particles

Radioactive particles associated with soil or similar materials can become airborne due to natural (e.g., wind) or human (scraping) forces. Once airborne, these particles can become inhaled, with subsequent exposure of the respiratory tract. Guidelines for acceptable concentrations of radionuclides in air have been developed and are presented in 10 CFR 20. At 464 Davison, this exposure pathway is of no concern due to the location of the contaminated material under grass and other vegetation. However, if present land use changes and extensive handling or scraping of the contaminated material occurs, the potential for radiation exposure from this pathway would be increased.

#### Ingestion of Radioactivity

The final pathway of potential radiation exposure for residents at this property is the ingestion of radionuclides through contaminated food or water. Since the water supply at this residence is the public water system, unaffected by the contamination on the property, ingestion of contaminated water is considered insignificant.

The magnitude of the radiation exposure to an individual ingesting foods grown in contaminated soil is dependent upon a number of factors, including: (1) the concentration of radionuclides in the soil, (2) the amount of uptake of the specific radionuclide by the plant of concern, and (3) the amount of the plant consumed by the individual. At the present time, no guidelines are available listing the acceptable concentrations of radionuclides in the soil or foods for the radionuclides of concern at this property. On this property, under present land use

---

\*Federal Register, Vol. 41, No. 253, pages 56777-56778, December 30, 1976 (10 CFR 712).

conditions, consumption of produce from a small garden could produce long-term radiation exposures, but these exposures would be small compared to direct gamma-ray and inhalation of radon and radon daughter exposure pathways. If land use changes (e.g., to large scale food production), the potential for long-term radiation exposures to individuals ingesting significant quantities of food grown in the contaminated soil would require careful evaluation.

#### PRELIMINARY ESTIMATE OF RADIATION RISK

For purposes of radiation protection, all radiation exposures are assumed to be capable of increasing an individual's risk of contracting cancer. A precise numerical value cannot be assigned with any certainty to a given individual's increase in risk attributable to radiation exposure. The reasons for this are numerous; they include the individual's age at onset of exposure, variability in latency period (time between exposure and physical evidence of disease), the individual's personal habits and state of health, previous or concurrent exposure to other cancer-causing agents, and the individual's family medical history. Because of these variables, large uncertainties exist in any estimates of the number of increased cancer deaths in the relatively small population exposed at this property.

Using the results of the radiological survey at this property, preliminary estimates of the increased risk of cancer for residents living there have been calculated.\* These estimates considered only the two most significant exposure pathways (direct radiation exposure and inhalation of radon and radon daughters) and were based on the following assumptions:

1. The measurements that are reported in Table III-3 are representative of the conditions throughout the year and for every year. It is recognized that radon and radon-daughter levels in the homes could be higher in winter because of less ventilation.

\*J. W. Healy and W. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, N. J." Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories to W. E. Mott, Department of Energy, Washington, D. C., July 17, 1981.

000819

2. The inhabitants spend 5% of their time in the basement (or the radon escaping to the upstairs when the door is opened adds an equivalent exposure).
3. The inhabitants live in this house all of their lives, from birth to age 70.
4. Each day the inhabitants spend an average of two hours away from the house and property, four hours outside the house but on the property, and 18 hours inside the house.

The total estimated increased risk due to radiation induced cancer for residents at 464 Davison Avenue was calculated to be 0.9%.\* Thus, for persons living for a lifetime at 464 Davison, instead of an average chance of 24.4% of eventually dying from cancer (the average for Bergen County, New Jersey in 1975)<sup>†</sup>, they might have a hypothetical average chance of 25.3% of dying from cancer. These values compare with a lifetime average chance of dying from cancer of 21.8% for the state of New Jersey, and 19.3% for the United States.

#### SUMMARY

A summary of radiation exposure data at 464 Davison Avenue is presented in Table III-3. Of the four primary radiation exposure pathways, only two may be of immediate concern at this site under present conditions of property use. Inhalation of radionuclides is considered a negligible source of radiation exposure at the present since there is no apparent ordinary mechanism to cause contaminated material in the soil to become airborne. It is believed that possible future use of portions of the property for growing food could contribute appreciable radiation exposure

---

\*J. W. Healy and W. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, N. J." Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories, to W. E. Mott, Department of Energy, Washington, D. C., July 17, 1981.

<sup>†</sup>Mortality statistics were obtained from data in Vital Statistics of the United States - 1975, Volume II - Mortality, Part B, U. S. Department of Health, Education and Welfare, Public Health Service, National Center for Health Statistics, (PHS) 78-1102, 1977.

000'6.20

to an individual consuming this food as a large fraction of his diet; however, under current conditions of use, this pathway is of no concern. However, exposures to gamma radiation outdoors on this property exceed the guidelines for exposure to individuals in the general public. This pathway is, therefore, a significant exposure mechanism at this site under current conditions of property use. In addition, the presence of significantly elevated radon and radon daughter concentrations inside the house indicate the potential for radiation exposures above the recommended guidelines, although additional sampling would be required to determine the average annual concentrations.

0 0 0 8 2 1

000622

Table III-1. Uranium-238 decay series

Parent	Half-life	Decay products	Daughter
Uranium-238	4.5 billion years	alpha	thorium-234
Thorium-234	24 days	beta, gamma	protactinium-234
Protactinium-234	1.2 minutes	beta, gamma	uranium-234
Uranium-234	250 thousand years	alpha	thorium-230
Thorium-230	80 thousand years	alpha	radium-226
Radium-226	1,600 years	alpha	radon-222
Radon-222	3.8 days	alpha	polonium-218
Polonium-218 <sup>a</sup>	3 minutes	alpha	lead-214
Lead-214 <sup>a</sup>	27 minutes	beta, gamma	bismuth-214
Bismuth-214 <sup>a</sup>	20 minutes	beta, gamma	polonium-214
Polonium-214 <sup>a</sup>	$\frac{2}{10,000}$ second	alpha	lead-210
Lead-210	22 years	beta	bismuth-210
Bismuth-210	5 days	beta	polonium-210
Polonium-210	140 days	alpha	lead-206
Lead-206	stable	none	none

<sup>a</sup>Short-lived radon daughters.

Table III-2. Thorium-232 decay series

Parent	Half-life	Decay products	Daughter
Thorium-232	14 billion years	alpha	radium-228
Radium-228	6.7 years	beta	actinium-228
Actinium-228	6.1 hours	beta, gamma	thorium-228
Thorium-228	1.9 years	alpha, gamma	radium-224
Radium-224	3.6 days	alpha, gamma	radon-220
Radon-220	55 seconds	alpha, gamma	polonium-216
Polonium-216	0.15 seconds	alpha	lead-212
Lead-212	11 hours	beta, gamma	bismuth-212
Bismuth-212	61 minutes	alpha, beta, gamma	polonium-212 (64%) or thallium-208 (36%)
Polonium-212	0.3 millionth of a second	alpha	lead-208
or	$\frac{3}{1,000,000}$		
Thallium-208	3.1 minutes	beta, gamma	lead-208
Lead-208	stable	none	none

000623

Table III-3. Summary of exposure data at 464 Davison Avenue in Maywood, New Jersey

Exposure pathway <sup>a,b</sup>	New Jersey background levels	Guideline value for individual in the general public	Average levels found on property
Gamma radiation	Outdoors: 8 microRoentgens per hour at one meter Indoors: 8 microRoentgens per hour at one meter	Outdoors: 60 microRoentgens per hour Indoors: 60 microRoentgens per hour	Outdoors: 140 microRoentgens per hour at one meter Indoors: 86 microRoentgens per hour at one meter
Radon in indoor air	Basement: 1.7 picocuries per liter Upstairs: 0.8 picocuries per liter	3 picocuries per liter	Basement: 38 picocuries per liter Upstairs: Less than 0.5 picocurie per liter
Radon daughters in indoor air	Basement: 0.008 working level Upstairs: 0.004 working level	Basement: 0.01 working level Upstairs: 0.01 working level	Basement: 0.28 working level Upstairs: 0.002 working level

<sup>a</sup>Inhalation of radionuclides pathway is not an appreciable source of radiation exposure to individuals living at this property.

<sup>b</sup>Ingestion of vegetables grown in contaminated soil could only be a significant pathway of radiation exposure to individuals living at this property if vegetables grown in contaminated soil constitute a large fraction of their diet.