Formerly Utilized Sites Remedial Action Program (FUSRAP)

# **Maywood Chemical Company Superfund Site**

# **ADMINISTRATIVE RECORD**

# **Document Number**

MISS- 115.



JUL 0 1 1988

J. Muscarlle, Inc. P. O. Box 915 Maywood, New Jersey 07607

Dear Mr. Muscarlle:

monthly structured sucks a model in the forest of the contract of the contract

As you know, the Department of Energy (DOE), has completed a radiological survey of your property at Essex & South Route 17, Maywood, New Jersey. Preliminary results from this survey identified residual radioactive material derived from the former Maywood Chemical Company site in Maywood, New Jersey, on your property. Concentrations of radioactivity in residual material are above background and above DOE guidelines used to determine if a property requires consideration for remedial action. Residual radioactive material in excess of guidelines was identified adjacent to the northwest portion of your building and the southeast portion of the property. Several localized areas were also identified with levels of radioactivity that were above background. While concentrations of radioactive materials do exceed guidelines for the project, the levels are such that health risks due to exposure to this material under current use of the property would be very low.

The Energy and Water Appropriation Act of 1984, enacted by Congress authorized DOE to undertake a decontamination research project for the former Maywood Chemical site and associated vicinity properties containing residual material derived from the Maywood Chemical operations. Therefore, based on the preliminary results of the survey, we have directed the Department's Oak Ridge Operations Office to take the steps required to complete any necessary remedial actions. That office of their representatives will contact you regarding the requirements for additional action.

The final report for the survey of your property will be forwarded directly to you by the Oak Ridge National Laboratory when it is published. We expect publication in the next few months. The survey of your property was identified in our files as MJO36. If you have any questions regarding this

BE05617

2

action, please call Mr. Andrew Wallo of my staff at (301)353-5439. Thank you for your cooperation in these investigations.

bcc:
J. Wagoner, NE-23
\*\*R. Atkin; OR\*\*
C. Young, OTS
W. Cottrell, OR

Sincerely,

151

James J. Fiore Division of Facility and Site Decommissioning Projects Office of Nuclear Energy NE-23 (1) Wallo

6 130/88

NE-23

Flore (1) 188

NE-23 RF Wallo RF NEG (4)

NE-23:Wallo:cb:353-5439:6/28/88:IBM180/83

ORNL/RASA-88/24

# HEALTH AND SAFETY RESEARCH DIVISION

Nuclear and Chemical Waste Programs (Activity No. AH 10 05 00 0; ONLWCO1)

# RESULTS OF THE RADIOLOGICAL SURVEY AT ESSEX STREET AND STATE ROUTE 17 (MJ036), MAYWOOD, NEW JERSEY

R. D. Foley, J. W. Crutcher, R. F. Carrier, and L. M. Floyd

Date of Issue - February 1989

# Investigation Team

R. E. Swaja – Measurement Applications and Development Manager
W. D. Cottrell – FUSRAP Project Director
R.D. Foley – Field Survey Supervisor

Survey Team Members

A. C. Butler M. E. Ward\* W. Winton

\*Stone Associates

Work performed by the MEASUREMENT APPLICATIONS AND DEVELOPMENT GROUP

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6285
operated by
MARTIN MARIETTA ENERGY SYSTEMS, INC.
for the
U. S. DEPARTMENT OF ENERGY
under Contract No. DE-AC05-840R21400

# CONTENTS

LIST OF FIGURES		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	V
LIST OF TABLES		•	•.					•	•	•		•			•	•	vii
ACKNOWLEDGMENTS		•		•	•	•	•	•	•	•	•		•		•		ix
INTRODUCTION		•		•	•	•	•					•		•	•	•	1
SURVEY METHODS		•		•	•				•	•		•	•	•	•	•	2
SURVEY RESULTS		•	•		•	•		•	•			•	•	•	•	•	2
Surface Gamma Radiation Levels		•		•	•.			•					•				2
Systematic and Biased Soil Samples	s .	•	•	•	•	•	•	•	•	•	•	•	•	•			3
SIGNIFICANCE OF FINDINGS		•				•	•		•	•	•	•	•		•	•	3
DEFERENCES															_		4

# LIST OF FIGURES

1	Gamma radiation levels ( $\mu$ R/h) measured on the surface at Essex Street and State Route 17, Maywood, New Jersey (MJ036)	5
2	Diagram showing locations of soil samples taken at Essex Street and State Route 17, Maywood, New Jersey (MJ036)	6

# LIST OF TABLES

1	Applicable guidelines for protection against radiation	7
2	Background radiation levels for the northern New Jersey area	7
3	Concentrations of radionuclides in soil at Essex Street and State  Route 17, Maywood, New Jersey (MJ036)	8

### ACKNOWLEDGMENTS

Research for this project was sponsored by the Division of Facility and Site Decommissioning Projects, U.S. Department of Energy, under Contract No. DE-AC05-840R21400 with Martin Marietta Energy Systems, Inc. The authors wish to acknowledge the support of J. E. Baublitz, Deputy Director, Office of Remedial Action and Waste Technology; J. J. Fiore, Director, Division of Facility and Site Decommissioning Projects; and members of their staff. The authors also appreciate the contributions of B. C. Littleton and L. J. Jeffers of IR&A Publications Office, B. S. Ellis, D. A. Roberts, and T. R. Stewart of the Environmental Assessments group, and M. E. Ward of Don Stone Associates for participation in the collection, analyses, and reporting of data for this survey.

# RESULTS OF THE RADIOLOGICAL SURVEY AT ESSEX STREET AND STATE ROUTE 17 (MJ036), MAYWOOD, NEW JERSEY\*

## INTRODUCTION

From 1916 to 1956, process wastes and residues associated with the production and refining of thorium and thorium compounds from monazite ores were generated by the Maywood Chemical Works (MCW), Maywood, New Jersey. During the latter part of this period, MCW supplied rare earth metals and thorium compounds to various government agencies. In the 1940s and 1950s, MCW produced thorium and lithium, under contract, for the Atomic Energy Commission (AEC). These activities ceased in 1956, and approximately three years later, the 30-acre real estate was purchased by the Stepan Company. The property is located at 100 Hunter Avenue in a highly developed area in Maywood and Rochelle Park, Bergen County, New Jersey.

During the early years of operation, MCW stored wastes and residues in lowlying areas west of the processing facilities. In the early 1930s, these areas were separated from the rest of the property by the construction of New Jersey State Highway 17. The Stepan property, the interim storage facility, and several vicinity properties have been designated for remedial action by the Department of Energy (DOE).

The waste produced by the thorium extraction process was a sandlike material containing residual amounts of thorium and its decay products, with smaller quantities of uranium and its decay products. During the years 1928 and 1944 to 1946, area residents used these process wastes mixed with tea and cocoa leaves as mulch in their lawns and gardens. In addition, some of the contaminated wastes were apparently eroded from the site into Lodi Brook and carried downstream.

Lodi Brook is a small stream flowing south from Maywood with its headwaters near the Stepan waste storage site. Approximately 150 ft after passing under State Route 17, the stream has been diverted underground through concrete or steel culverts until it merges with the Saddle River in Lodi, New Jersey. Only a small section near Interstate 80 remains uncovered. From the 1940s to the 1970s when the stream was being diverted underground, its course was altered several times. Some of these changes resulted in the movement of contaminated soil to the surface of a few properties, where it is still in evidence. In other instances, the contaminated soil was covered over or mixed with clean fill, leaving no immediate evidence on the surface. Therefore, properties in question may be drilled in search of former stream bed material, even in the absence of surface contamination. Lodi Brook is now located near the west boundary of the property discussed in this report.

As a result of the Energy and Water Appropriations Act of Fiscal Year 1984, the property discussed in this report and properties in its vicinity contaminated with residues from the former MCW were included as a decontamination research and development project under the DOE Formerly Utilized Sites Remedial Action

<sup>\*</sup>The survey was performed by members of the Measurement Applications and Development Group of the Health and Safety Research Division at Oak Ridge National Laboratory under DOE contract DE-AC05-84OR21400.

Program. As part of this project, DOE is conducting radiological surveys in the vicinity of the site to identify properties contaminated with residues derived from the MCW. The principal radionuclide of concern is thorium-232. The radiological survey discussed in this report is part of that effort and was conducted, at the request of DOE, by members of the Measurement Applications and Development Group of the Oak Ridge National Laboratory.

A radiological survey of the commercial property at Essex Street and State Route 17, Maywood, New Jersey, was conducted during 1987. The survey and sampling of the ground surface and subsurface were carried out on September 2, 1987.

### SURVEY METHODS

The radiological survey of the property included a gamma scan of the entire property outdoors and collection of surface and subsurface soil samples. No indoor survey measurements were performed.

Using a portable gamma scintillation meter, ranges of measurements were recorded for areas of the property surface. Systematic soil samples were then obtained at randomly selected locations irrespective of gamma exposure rates. In addition, biased soil samples were collected in areas of elevated gamma levels. These survey methods followed the plan outlined in Reference 1. A comprehensive description of the survey methods and instrumentation is presented in *Procedures Manual for the ORNL Radiological Activities (RASA) Program*, Oak Ridge National Laboratory, ORNL/TM-8600 (April 1987).<sup>2</sup>

## SURVEY RESULTS

Applicable federal guidelines are summarized in Table 1.<sup>3</sup> The normal background radiation levels for the northern New Jersey area are presented in Table 2. These data are provided for comparison with survey results presented in this section. All direct measurement results presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations measured in environmental samples.

### Surface Gamma Radiation Levels

Gamma radiation levels measured during a gamma scan of the surface of the property are given in Fig. 1. Gamma exposure rates over the major portion of the property ranged from 7 to 11  $\mu$ R/h. Areas of elevated gamma readings (shaded areas in Fig. 1.) were found near the northwest corner of the building (15-54  $\mu$ R/hr) and south of the building (15-49  $\mu$ R/h), with several small hot spots occurring on the front lawn between the building and the parking area.

# Systematic and Biased Soil Samples

Four systematic soil samples (S1A-S2B) and thirteen biased soil samples (B1A-B5C) were taken for radionuclide analyses. The samples were taken at 15-cm increments from depths of 0 to 30 cm for the systematic samples and from depths of 0 to 45 cm for the biased samples. Locations of the samples are shown in Fig. 2, with results of laboratory analyses provided in Table 3. Concentrations of <sup>226</sup>Ra and <sup>232</sup>Th in the systematic samples ranged from 0.53 to 1.1 pCi/g and from 0.92 to 4.4 pCi/g, respectively. In the biased samples, concentrations ranged from 1.1 to 6.0 pCi/g for <sup>226</sup>Ra and from 2.3 to 61 pCi/g for <sup>232</sup>Th. The DOE guideline for <sup>232</sup>Th concentration in surface soil is exceeded in the five biased surface samples (B1-5), and the guideline for subsurface soil is exceeded in two biased samples (B3B and B5B). Radium-226 concentration in surface soil exceeded the DOE guideline in one sample (B5A), and the other biased samples were slightly elevated above background for the northern New Jersey area (Table 2) but are below DOE guidelines.

## SIGNIFICANCE OF FINDINGS

Measurements taken at Essex Street and State Route 17 indicate that the property contained radioactive contamination primarily from the <sup>232</sup>Th decay chain, with some contamination from <sup>226</sup>Ra. These radionuclide distributions are typical of the type of material originating from the processing operations at the MCW. The concentration and extent of <sup>232</sup>Th on this property are in excess of the applicable DOE criteria (Table 1). This material was found in the locations shown in Fig. 2 at sample locations B1-5. Based on the results of this radiological assessment, it is recommended that this site be considered for inclusion in the DOE remedial action program.

## REFERENCES

- 1. W. D. Cottrell, ORNL, to A. J. Whitman, DOE/HQ, correspondence, "Radiological Survey of Private Properties in Lodi, New Jersey" (August 15, 1984).
- T. E. Myrick, B. A. Berven, W. D. Cottrell, W. A. Goldsmith, and F. F. Haywood, Procedures Manual for the ORNL Radiological Survey Activities (RASA) Program, Oak Ridge National Laboratory, ORNL/TM-8600 (April 1987).
- 3. U.S. Department of Energy, Guidelines for Residual Radioactivity at Formerly Utilized Sites, Remedial Action Program and Remote Surplus Facilities Management Program Sites (Rev. 2, March 1987).
- 4. T. E. Myrick and B. A. Berven, State Background Radiation Levels: Results of Measurements Taken During 1975-1979, Oak Ridge National Laboratory, ORNL/TM-7343 (November 1981).

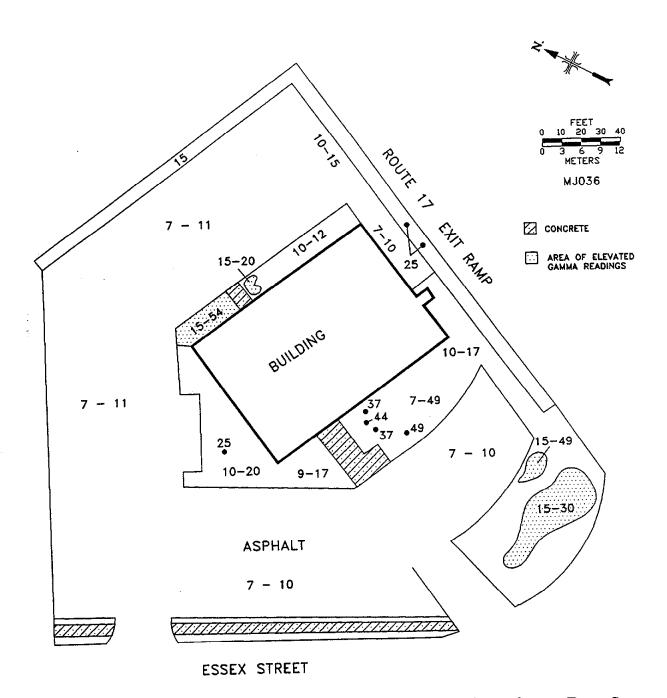


Fig. 1. Gamma radiation levels ( $\mu$ R/h) measured on the surface at Essex Street and State Route 17, Maywood, New Jersey (MJ036).

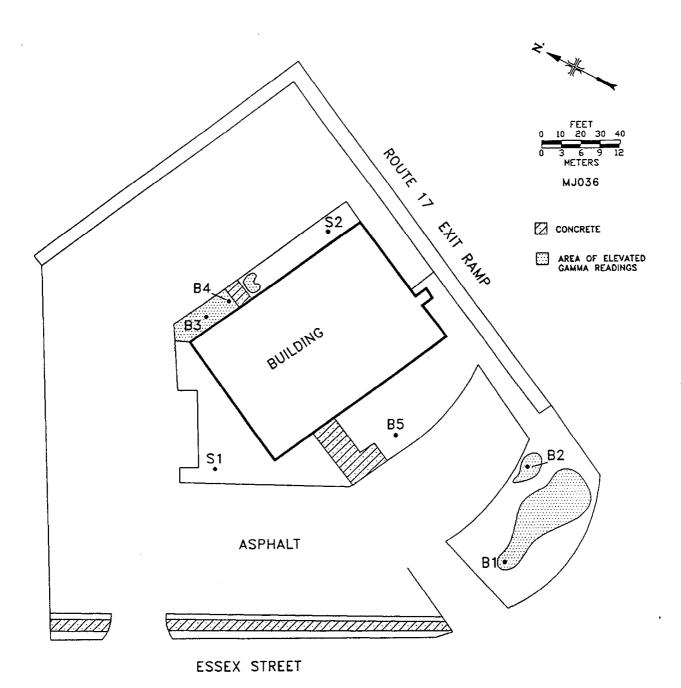


Fig. 2. Diagram showing locations of soil samples taken at Essex Street and State Route 17, Maywood, New Jersey (MJ036).

Table 1. Applicable guidelines for protection against radiation<sup>a</sup>

Mode of exposure	Exposure conditions	Guideline value					
Radionuclide concentrations in soil	Maximum permissible concentration of the following radionuclides in soil above background levels averaged over 100 m <sup>2</sup> area  232Th 230Th 228Ra 226Ra	5 pCi/g averaged over the first 15 cm of soil below the surface; 15 pCi/g when averaged over 15-cm thick soil layers more than 15 cm below the surface					

<sup>&</sup>lt;sup>a</sup>Reference 3.

Table 2. Background radiation levels for the northern New Jersey area

Type of radiation measurement or sample	Radionuclide level or radionuclide concentration					
Concentration of radionuclides in soil (pCi/g)  232Th	$0.9^a$					
238ŢŢ	$0.9^a$					
<sup>226</sup> Ra	$0.9^a$					

<sup>&</sup>lt;sup>a</sup>Reference 4.

Table 3. Concentrations of radionuclides in soil at Essex Street and State Route 17, Maywood, New Jersey (MJ036)

C	Donah	Radionuclide concentration (pCi/g)							
Sample <sup>a</sup>	$egin{array}{c}  ext{Depth} \  ext{(cm)} \end{array}$	<sup>226</sup> Ra <sup>b</sup>	$^{232}\mathrm{Th}^{b}$						
	Sy	estematic samples <sup>c</sup>							
S1A	0-15	$1.0 \pm 0.06$	$4.0 \pm 0.09$						
S1B	15–30	$1.1 \pm 0.2$	$4.4 \pm 0.6$						
S2A	0-15	$0.59 \pm 0.02$	$1 \pm 0.04$						
S2B	15–30	$0.53 {\pm} 0.07$	$0.92 {\pm} 0.2$						
		Biased samples <sup>d</sup>							
B1A	0–15	$1.5 \pm 0.05$	$9.5 \pm 1$						
B1B	15–30	$1.4 \pm 0.1$	$7.1 \pm 0.3$						
B1C	30-45	$1.1 \pm 0.1$	$2.3 \pm 0.3$						
B2A	0-15	$2.2 \pm 0.2$	11 $\pm 0.7$						
B2B	15–30	$1.8 \pm 0.6$	$6.7 \pm 0.3$						
B2C	30-45	$1.2 \pm 0.1$	$2.5 \pm 0.2$						
B3A	0–15	$4.6 \pm 1$	$61 \pm 3$						
B3B	15–30	$2.1 \pm 0.3$	$14 \pm 2$						
B4A	0–15	$3.3 \pm 0.2$	$21 \pm 2$						
B4B	15–30	$2.0 \pm 0.2$	$11 \pm 0.3$						
B5A	0–15	$6.0 \pm 0.09$	$60 \pm 4$						
B5B	15–30	$3.1 \pm 0.5$	$20 \pm 2$						
B5C	30–45	$1.9 \pm 0.3$	$11 \pm 0.6$						

<sup>&</sup>lt;sup>a</sup>Locations of soil samples are shown on Fig. 2.

<sup>&</sup>lt;sup>b</sup>Indicated counting error is at the 95% confidence level  $(\pm 2\sigma)$ .
<sup>c</sup>Systematic samples are taken at grid locations irrespective of gamma exposure.

 $<sup>^</sup>d$ Biased samples are taken from areas shown to have elevated gamma exposure rates.

## INTERNAL DISTRIBUTION

 1. B. A. Berven
 12. L. M. Floyd

 2. R. F. Carrier
 13. S. V. Kaye

 3. W. D. Cottrell
 14. P. T. Owen

 4. A. G. Croff
 15–17. R. E. Swaja

 5. J. W. Crutcher
 18. J. K. Williams

 6. J. T. Ensminger
 19. IR&A Publications Office

 7–11. R. D. Foley
 20. Laboratory Records – RC

## **EXTERNAL DISTRIBUTION**

- J. D. Berger, Oak Ridge Associated Universities, P. O. Box 117, Oak Ridge, TN 37831
- 22. R. W. Doane, Eberline, Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
- J. J. Fiore, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 24–26. P. J. Gross, U.S. Department of Energy, P. O. Box E, Oak Ridge, TN 37831
- 27-29. G. K. Hovey, Bechtel National, Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
  - 30. L. R. Levis, Roy F. Weston, Inc., 20030 Century Blvd., Germantown, MD 20874
  - 31. G. P. Turi, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
  - 32. J. W. Wagoner, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 33-35. Andrew Wallo III, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
  - 36. Office of Assistant Manager, Energy Research and Development, Oak Ridge Operations Office, Oak Ridge, TN 37831
- 37-38. Office of Scientific and Technical Information, DOE, Oak Ridge, TN 37831